




MOTORS & FANS

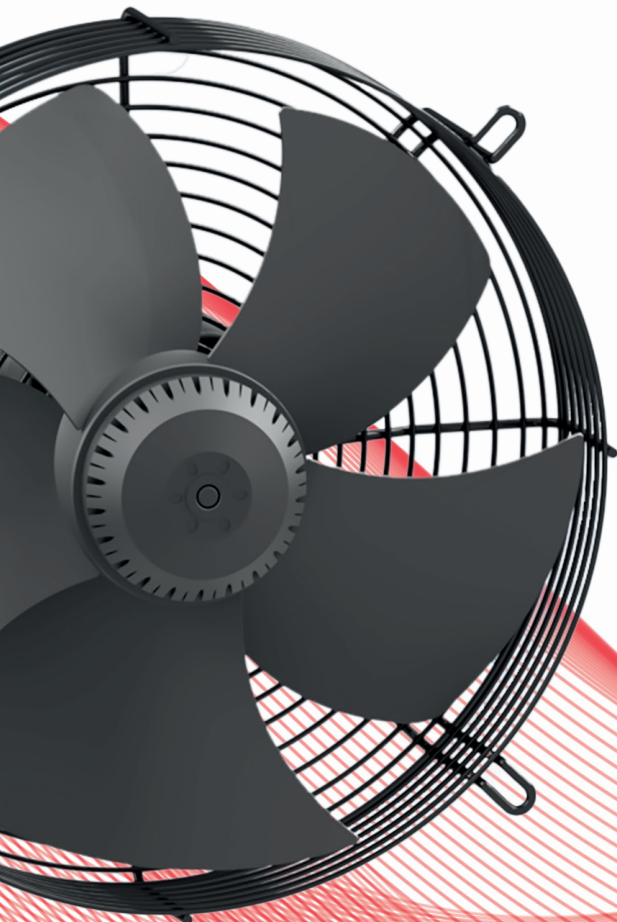

Professional  
Cooling Fan  
Manufacturer

---

AC Industrial Axial Fan

[www.fanlab.com](http://www.fanlab.com)

## COMPANY PROFILE


### ABOUT US

Fanlab is a professional manufacturer with 15 years of experience in the refrigeration market, specializing in shaded pole motors, EC motors, and axial fans.

The company's goal is to meet all customer requirements through a high level of customization.

Thanks to dedicated investments in high-tech solutions, Fanlab is able to study, develop, and implement continuous improvements to its products.

This approach allows the company to ensure high performance, reliability, and efficiency across a wide range of applications.

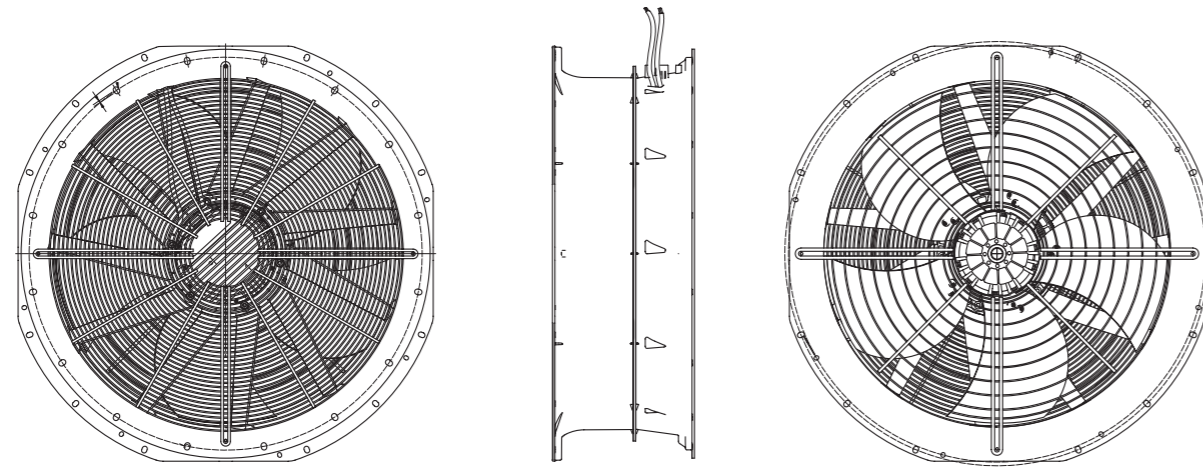

## OUR CATALOGUES




## INDEX Motors & Axial fans

<b>AC INDUSTRIAL AXIAL FANS.....04</b>	Ø 450 .....31
Ø 200 .....08	Ø 500 .....38
Ø 250 .....10	Ø 550 .....49
Ø 300 .....13	Ø 600 .....54
Ø 315 .....17	Ø 630 .....59
Ø 330 .....18	Ø 710 .....70
Ø 350 .....19	Ø 800 .....78
Ø 380 .....23	Ø 850 .....90
Ø 400 .....24	Ø 900 .....86
Ø 420 .....30	Ø 950 .....90


# CODIFICATION

## Model Numbering System

### I. Motor

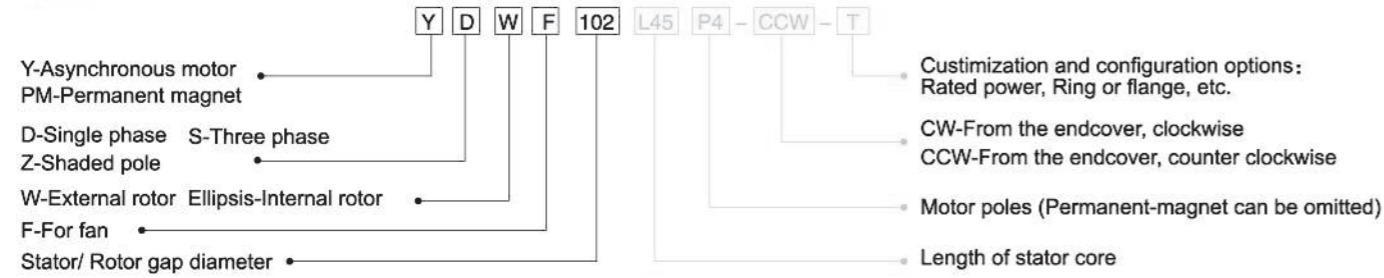

### II. Axial fan model

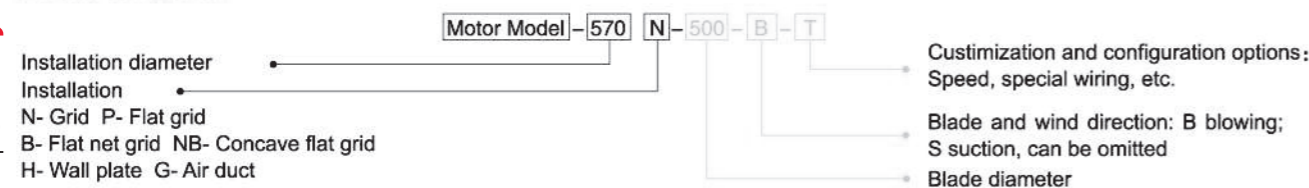

### III. Shaded pole motor



### IV. Voltage

The allowed working voltage fluctuation range for single phase fan and 380v/50Hz three phase fan is  $\pm 5\%$ , while  $\pm 10\%$  for 400v/50Hz three phase fan; the allowed working voltage fluctuation range for 60Hz fan is from  $-10\%$  to  $+20\%$ .

### V. Airflow direction

The regular product for axial fan is suction type: air flows from the blade through the grid.

### VI. Airflow curve

According to GB/T 1236(IDT ISO 5801) and using A type wind roon air suction test device. The airflow curve is measured by MaEr wall plate without guard, calculating the performance value under standard atmosphere  $20^\circ\text{C}$ . The value here is the impeller static pressure  $P_{sf}$ . The static pressure should not be higher than the curve end during application.

### VII. Performance parameter

The listed parameter is measured at the highest static pressure efficiency, when the fan is able to run for long time under regulated environment temperature. If the energy efficiency value  $\geq 40$ , then the energy efficiency for the fan is ErP. If N is not mentioned, it means this type of fan has no request on ErP. The noise is measured at one meter place from the fan outlet ( $45^\circ$ ) when it runs freely. But error happens under irregular voltage please refer to the specification.

VIII. Single phase motor is usually equipped with a thermal protector, the operating temperature is level B- $130\pm 5^\circ\text{C}$ , level F- $150\pm 5^\circ\text{C}$ . If you need to install thermal protector for three phase motor, please specify.

IX. When the client needs to do tapping speed-regulation to the external rotor motor, the max. rotation speed and airflow volume shall be reduced compared with regular products to meet the low speed slip differential performance requirements.

X. The length of the lead wire for regular products is 0.8~1m, special requests on the length and junction box shall be specified.

XI. The cold air blower motor must be processed by special technology to adapt to the low temperature and humidity environment. Please specify when purchasing.

XII. The provided photos and dimensions are for reference only, please refer to the CIMC MaEr sample fan and specification for details.

# AC series

## Industrial Axial Fans



### AC EXTERNAL ROTOR AXIAL FANS

Single and three-phase external rotor axial fans are mostly used in industrial ventilation and commercial refrigeration. The fan blades, in thermoplastic material or steel, have been designed to get a compact high efficiency fan with a reduced sound level.

- Power supply 230V - 50/60Hz | 400V - 50/60HZ
- Insulation Class B
- Fan blades diameter: from 300mm to 950mm

Other dimensions available on request


# CUSTOMIZED OPTIONS

## 一、客户提供资料 Information from customers


电压频率 Voltage frequency	1-单相 1- single phase	V	Hz	± %	3-三相 3- three phase	V	Hz	± %
		V	Hz	± %		V	Hz	± %
调速 Adjustable	<input type="checkbox"/> 并头二速 Dual speed paralleling <input type="checkbox"/> 抽头二速 Dual speed tapping <input type="checkbox"/> SCR调速 SCR speed	<input type="checkbox"/> 抽头三速 Tri-speed tapping	<input type="checkbox"/> Y/Δ调速 Y/Δ transform speed	<input type="checkbox"/> Y/Δ双电压 Y/Δ dual voltage	<input type="checkbox"/> 变频 Frequency conversion 能效要求: Energy requirement	<input type="checkbox"/> 不调速 Constant speed	<input type="checkbox"/> 无要求 No requirement	<input type="checkbox"/> 不调速 Constant speed
		<input type="checkbox"/> 按参数要求 By parameter 按马尔 样本曲线 According to MaEr sample curve	pa	m³/h		r/min	W	<input type="checkbox"/> ERP2015
性能要求 Performance requirement		pa	m³/h	r/min	W			
出线 Leading wire outlet	<input type="checkbox"/> 带接线盒 Junction box <input type="checkbox"/> 带引出线 Leading wire	m	热保护器 Thermal Protector	<input type="checkbox"/> 内置 Built-in <input type="checkbox"/> 外置 Built-out	空气温度℃ Air temperature℃	~		
运行环境 Operating environment	<input type="checkbox"/> 室内 Indoor <input type="checkbox"/> 室外 Outdoor	<input type="checkbox"/> 冷凝器 Condenser <input type="checkbox"/> 冷库 Refrigeration house	<input type="checkbox"/> 蘑菇库 Mushroom fruiting house <input type="checkbox"/> 冷库 Refrigeration house	<input type="checkbox"/> 冷干机 Air dryer	<input type="checkbox"/> 空调室外机 Outdoor air conditioning <input type="checkbox"/> 其它 Other			

## 二、安装方式及风向 Installation and Air direction


- 垂直安装 Vertical installation   
  端盖向上安装 Upwards horizontal installation   
  端盖向下安装 Downwards horizontal installation

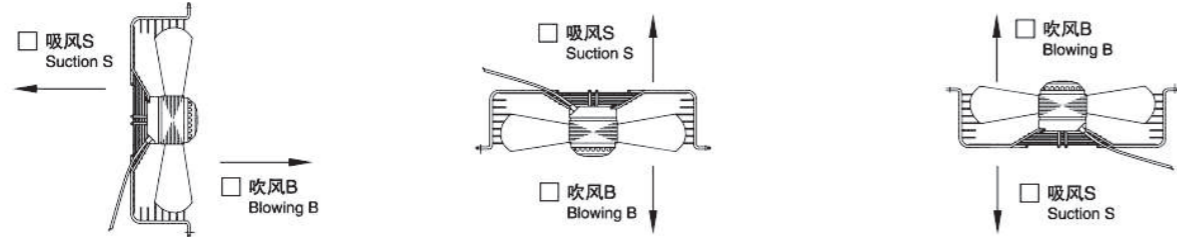

## 三、网罩和风筒 Grid and duct

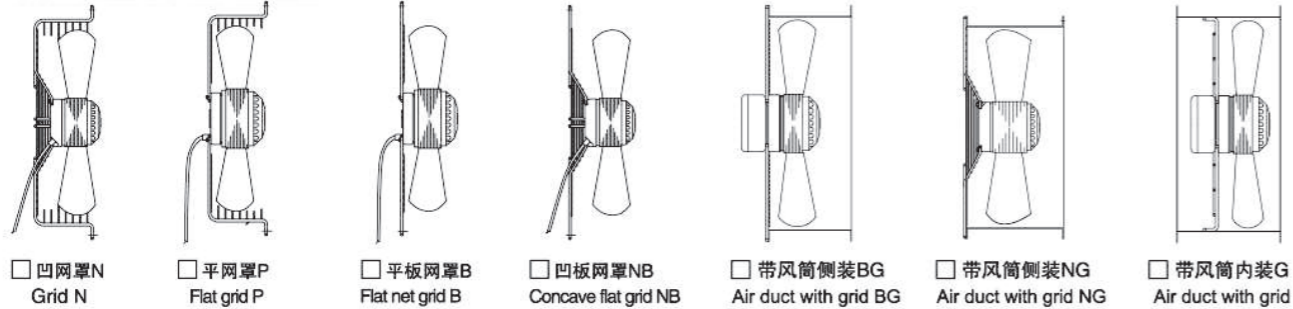

## 四、导风圈 Wall plate

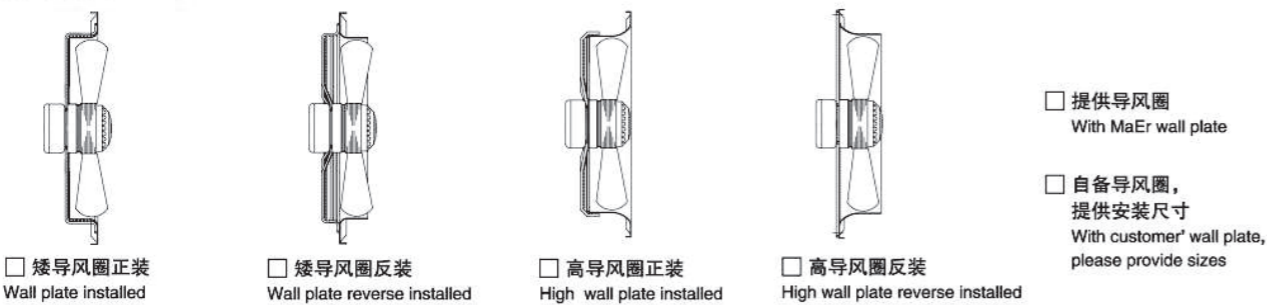


1. Specifications might change without notice;

2. Special design on request

# WIRING DIAGRAM


## 1、普通三相风机接线图

Wiring diagram for three phase motor common wiring, without TP

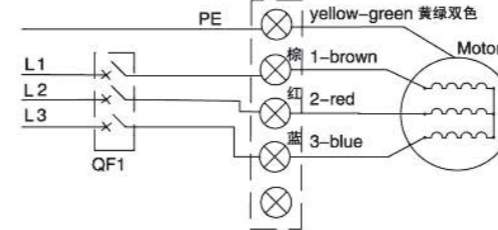

## 2、三相Y/Δ运行、带热保护器风机接线图


Wiring diagram for three phase motor with Y/Δ transformation, with TP

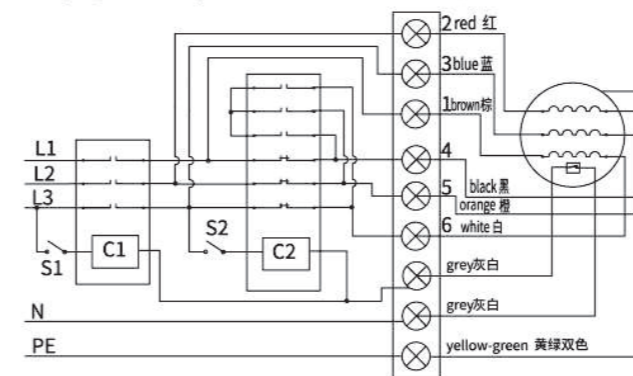

C1-运行控制接触器, S1接通, 风机运行。  
 C2-Y/Δ运行控制接触器, S2断开, Δ接法; S2接通, Y接法。  
 C1- Contactor, fan runs when S1 ON.  
 C2- Y/Δ transformer, Δ circuit when S2 OFF; Y circuit when S2 ON.

## 3、三相Y/Δ运行、不带热保护器风机接线图


Wiring diagram for three phase motor with Y/Δ transformation, without TP.

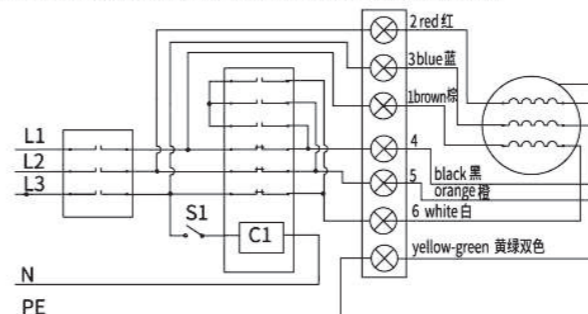

QF1-运行控制空气开关, QF1接通, 风机运行。  
 C1-Y/Δ运行控制接触器, S1断开, Δ接法; S1接通, Y接法。  
 QF1- Air circuit-breaker, fan runs when QF1 ON.  
 C1- Y/Δ transformer, Δ circuit when S1 OFF; Y circuit when S1 ON.

## 4、三相风机带热保护器风机接线图

Wiring diagram for three phase motor with TP

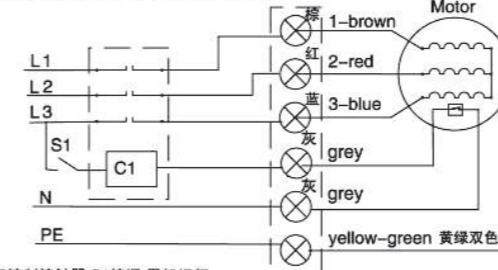


C1-运行控制接触器, S1接通, 风机运行。  
 C1- Contactor, fan runs when S1 ON.

1. Specifications might change without notice;


## 5、普通单相风机接线图

Wiring diagram for single phase motor common wiring

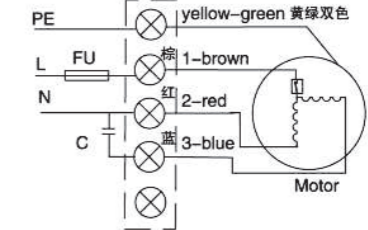

## 6、单相抽头调速风机接线图


Wiring diagram for single phase motor with speed tapping changing

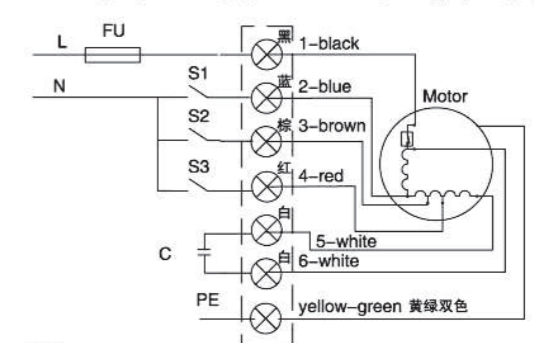

警告:  
 S1、S2、S3必须互锁, 每时只限于一只合上。  
 S1、S2、S3分别为高、中、低速档开关。电动机启动应由S1完成。  
 NOTICE:  
 S1, S2, S3 must be locked down by each other, each time only one switch can be turn ON.  
 S1, S2, S3 are switches for HIGH, MIDDLE and LOW speed each.  
 Motor running should be started from S1 ON circuit.

## 7、单相风机SCR调速接线图I


Wiring diagram I for single phase motor with speed SCR changing

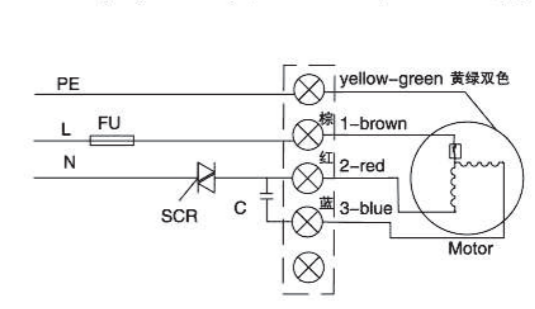

仅适用于67、68、74系列电机。  
 Only for motor series 67, 68, 74.

## 8、单相风机SCR调速接线图II

Wiring diagram II for single phase motor with speed SCR changing



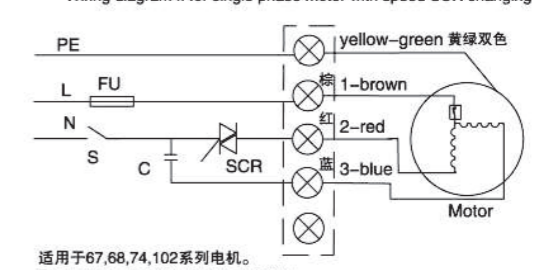


适用于67,68,74,102系列电机。  
 For motor series 67, 68, 74 and 102.

2. Special design on request

Ø 200

AC AXIAL FAN

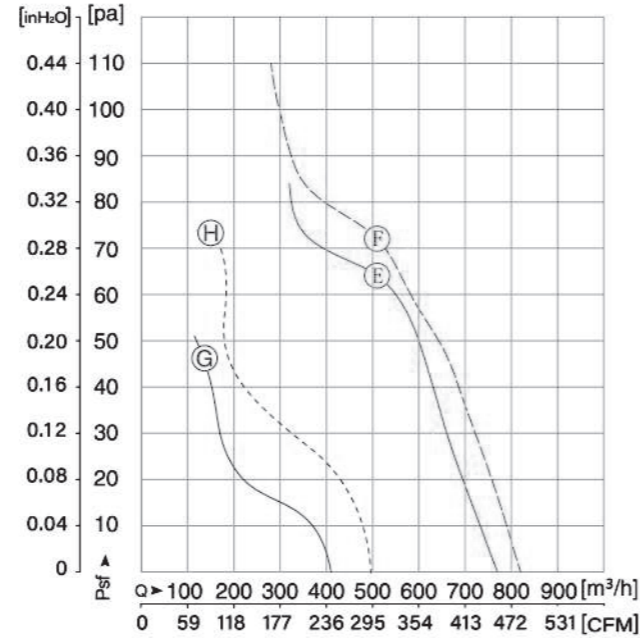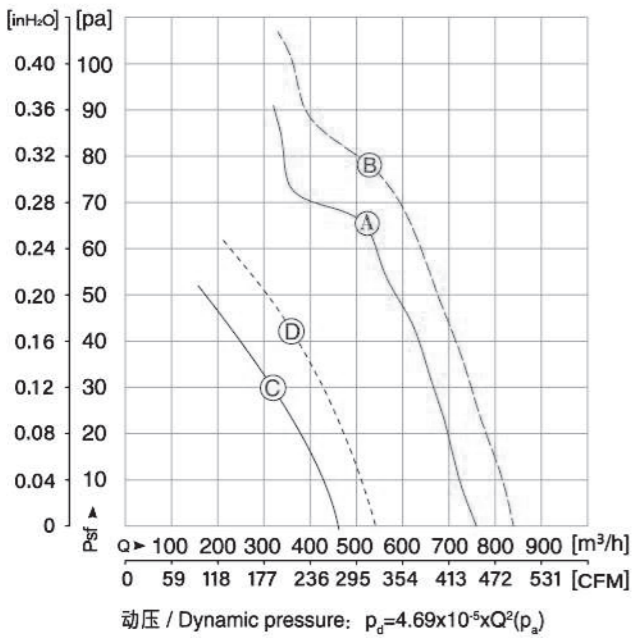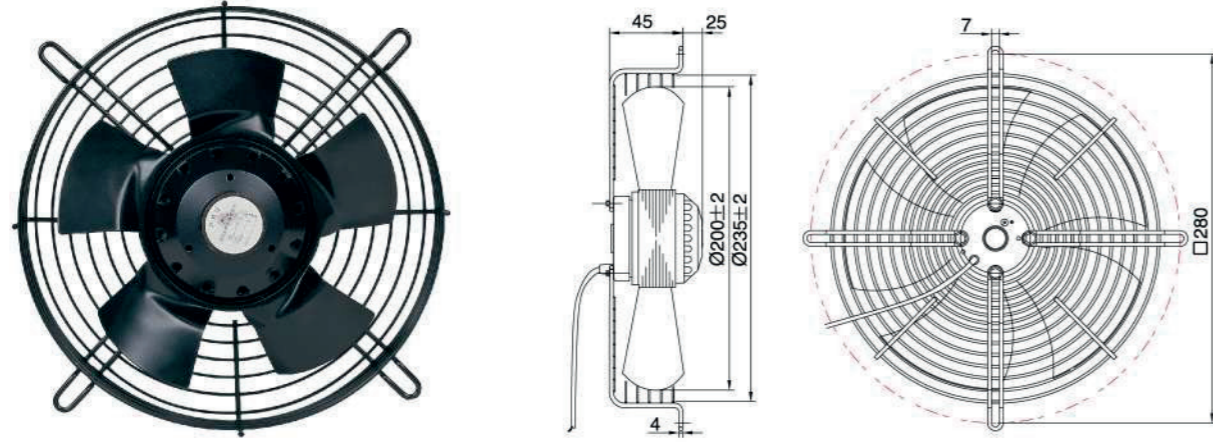



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF67L15P2-280P-200	1~220	50	2	Ⓐ	55	2456	0.24	66	-40~+80	ERP2026*	66	
		60		Ⓑ	72	2652	0.32	78	-40~+80	ERP2026*	68	
YDWF68L15P4-280P-200	1~220	50	1.5	Ⓒ	36	1442	0.17	30	-40~+80	ERP2026*	53	
		60		Ⓓ	41	1724	0.21	42	-40~+80	ERP2026*	54	
YSWF68L15P2-280P-200	3~380	50	—	Ⓔ	57	2322	0.12	64	-40~+75	ERP2026*	66	
		60		Ⓕ	63	2435	0.11	72	-40~+90	ERP2026*	68	
YSWF68L15P4-280P-200	3~380	50	—	Ⓖ	34	1441	0.12	46	-40~+90	ERP2026*	53	
		60		Ⓗ	28	1685	0.09	73	-40~+90	ERP2026*	54	

1. Specifications might change without notice;

2. Special design on request

Ø 200

AC AXIAL FAN

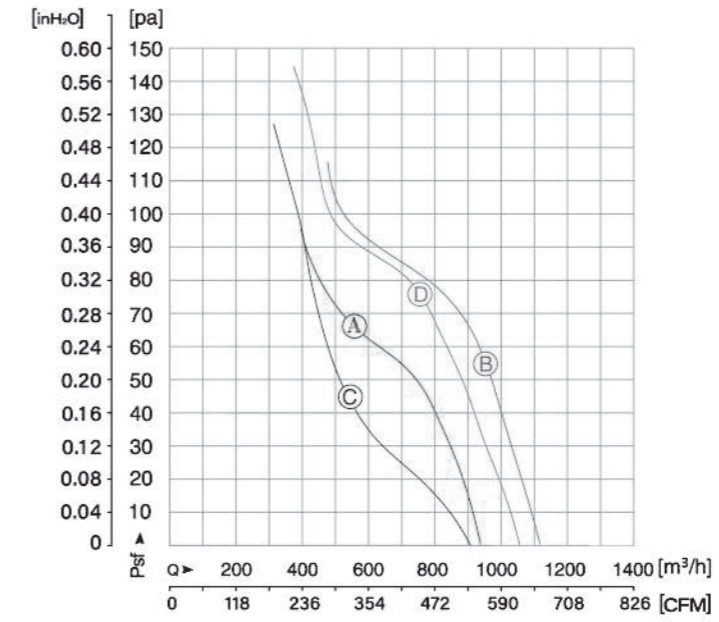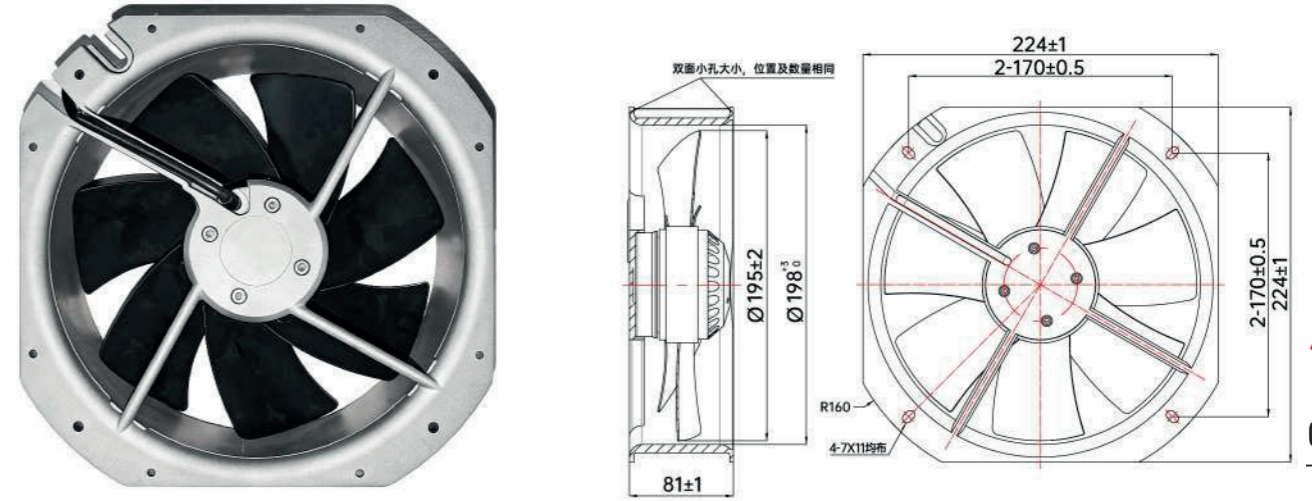



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF67L25P2-170H-200-7	1~230	50	3	Ⓐ	82	2729	0.36	60	-40~+70	ERP2026*	65	
		60		Ⓑ	105	3123	0.47	78	-40~+70	ERP2026*	67	
YSWF68L25P2-170H-200-7	3~400	50	—	Ⓒ	98	2675	0.28	60	-40~+70	ERP2026*	64	
		60		Ⓓ	96	2988	0.21	80	-40~+70	ERP2026*	66	

1. Specifications might change without notice;

2. Special design on request

Ø 250



AC AXIAL FAN

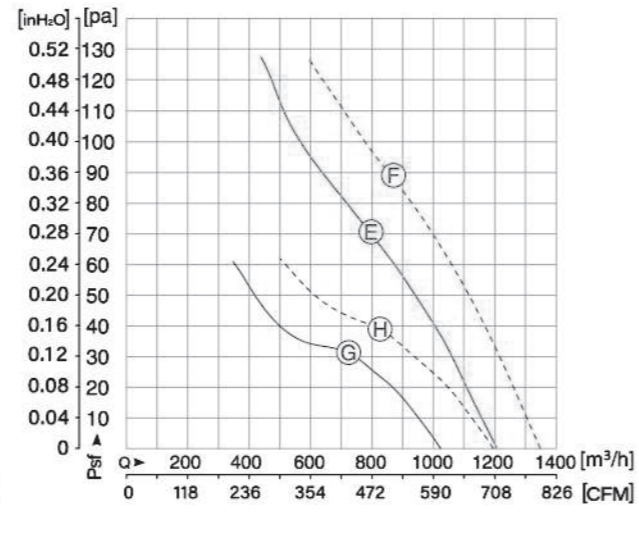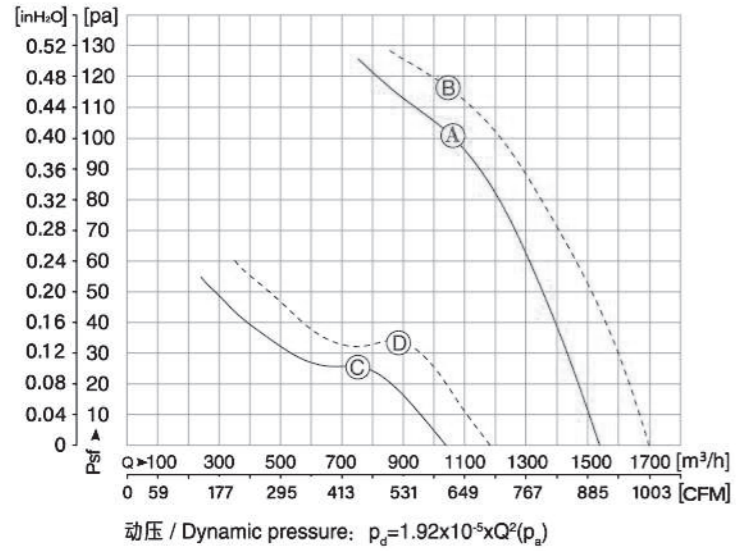

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF67L25P2-□-250	1~220	50	3	(A)	114	2579	0.50	101	-40~+75	ERP2026*	68	
		60		(B)	154	2732	0.67	117	-40~+80	ERP2026	70	
YDWF68L25P4-□-250	1~220	50	2	(C)	45	1357	0.21	25	-40~+80	ERP2026*	54	
		60		(D)	62	1581	0.29	34	-40~+80	ERP2026*	55	
YSWF68L25P2-□-250	3~380	50	—	(E)	92	2616	0.24	71	-40~+80	ERP2026*	68	
		60		(F)	103	2876	0.20	89	-40~+85	ERP2026*	70	
YSWF68L25P4-□-250	3~380	50	—	(G)	52	1387	0.13	31	-40~+90	ERP2026*	54	
		60		(H)	61	1579	0.13	39	-40~+90	ERP2026*	55	

Ø 250


AC AXIAL FAN

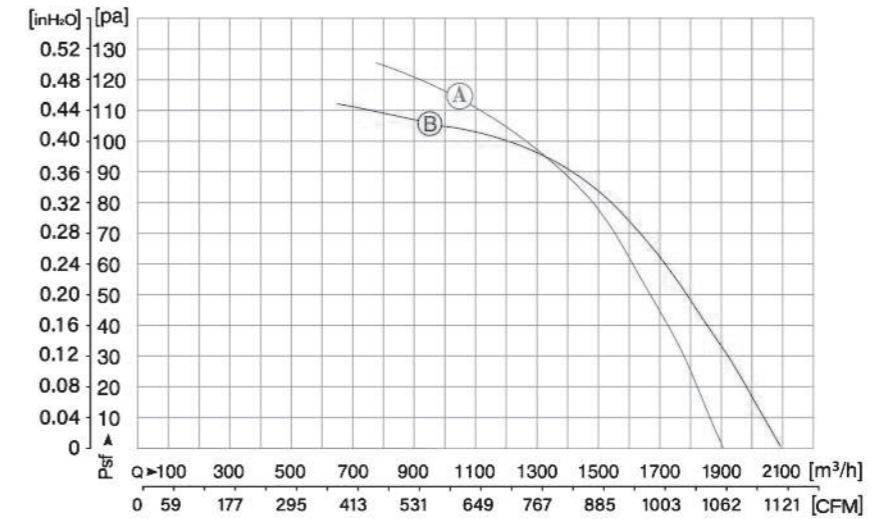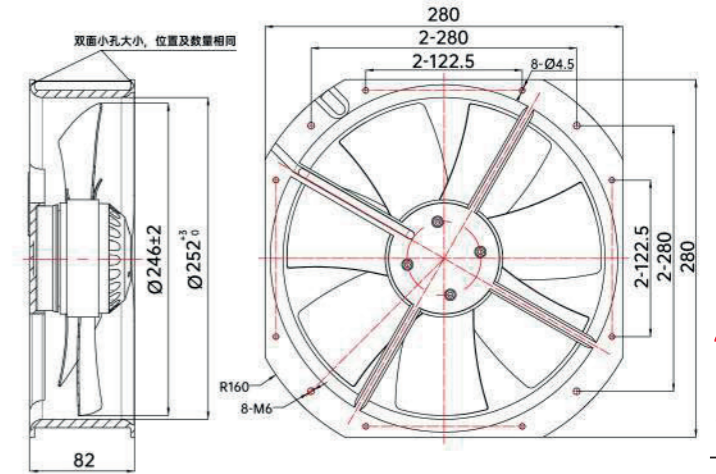


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF67L35P2-208H-250-7	1~230	50	4	(A)	149	2496	0.65	85	-40~+70	ERP2026*	66	
		60		(B)	203	2528	0.88	84	-40~+65	ERP2026	67	

# Ø 250


## INSTALLATION ACCESSORIES

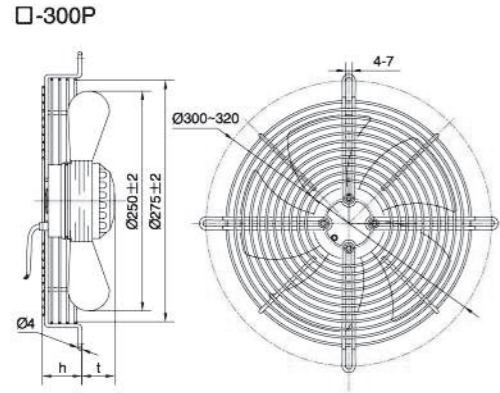

平网罩 Flat screen grid 300P			
型号 MODEL	h	t	
YDWF67L25P2-300P-250	45	35	
YD(S)WF68L25P4-300P-250	45	35	
YSWF68L25P2-300P-250	45	35	

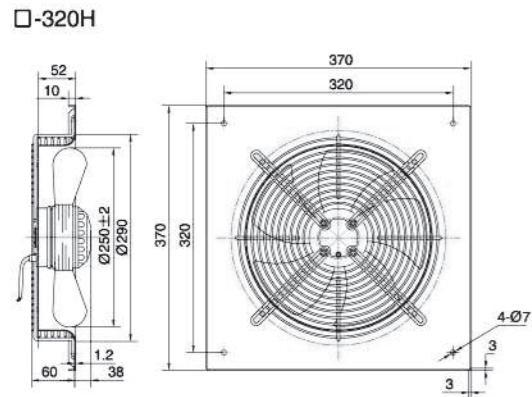

带导风圈 Wall plate 320H			
型号 MODEL			
YDWF67L25P2-320H-250			
YD(S)WF68L25P4-320H-250			
YSWF68L25P2-320H-250			

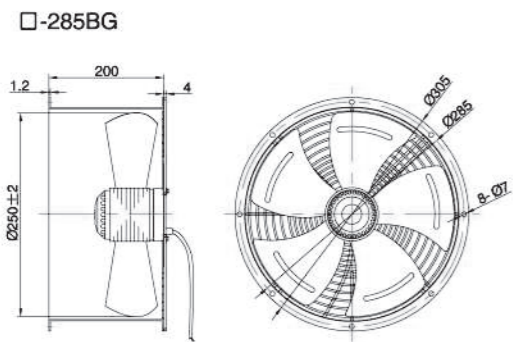



带风筒 Air duct 285BG			
型号 MODEL			
YDWF67L25P2-285BG-250			
YD(S)WF68L25P4-285BG-250			
YSWF68L25P2-285BG-250			

### □-其他安装附件 Others

平板网罩 Flat net grid 300B			
型号 MODEL	h	t	
YDWF67L25P2-300B-250	0	75	
YD(S)WF68L25P4-300B-250	0	75	
YSWF68L25P2-300B-250	0	75	

# Ø 300

## AC AXIAL FAN

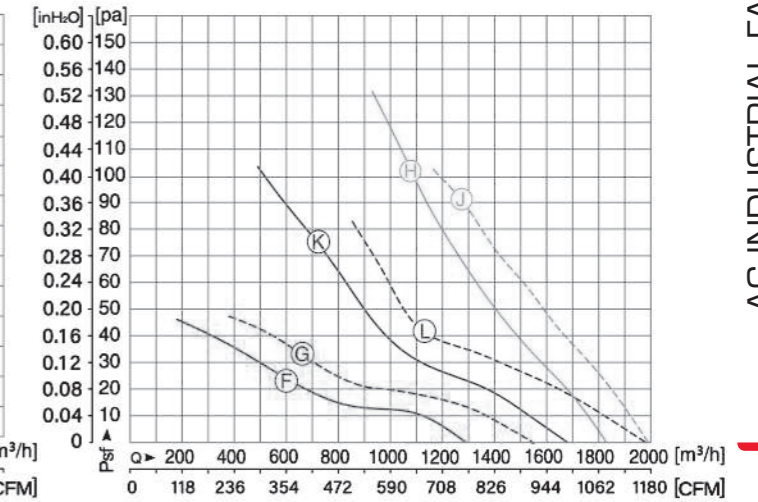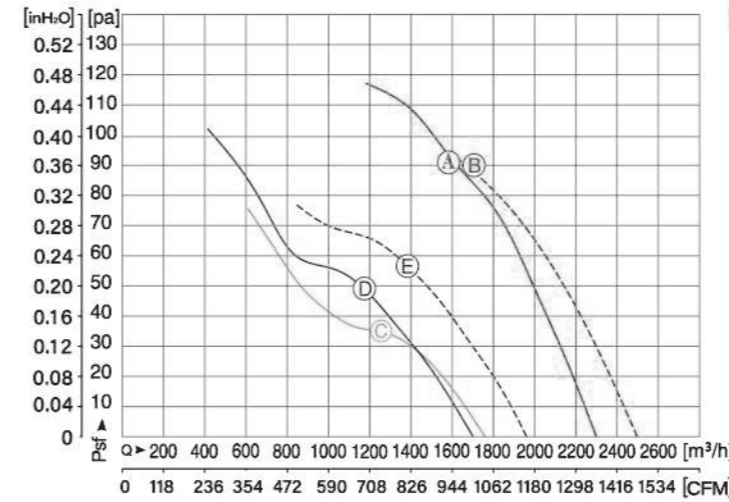

动压 / Dynamic pressure:  $p_d = 9.26 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF67L35P2-□-300	1~220	50	4	(A)	168	2592	0.73	92	-40 ~ +70	ERP2026*	70	
YDWF68L35P4-□-300	1~220	50	3	(B)	239	2590	1.04	91	-40 ~ +65	ERP2026	73	
YDWF68L35P4-□-300	1~220	50	3	(C)	89	1354	0.41	35	-40 ~ +75	ERP2026*	59	
YDWF68L35P4-□-300	1~220	50	3	(D)	88	1355	0.37	49	-40 ~ +75	ERP2026*	58	
YDWF68L35P4-□-300	1~220	50	3	(E)	112	1546	0.48	57	-40 ~ +80	ERP2026*	61	
YDWF68L35P6-□-300	1~220	50	2	(F)	53	886	0.24	26	-40 ~ +80	ERP2026*	55	
YDWF68L35P6-□-300	1~220	60	2	(G)	66	1007	0.30	33	-40 ~ +80	ERP2026*	56	
YSWF68L35P2-□-300	3~380	50	—	(H)	169	2384	0.32	104	-40 ~ +75	ERP2026	70	
YSWF68L35P2-□-300	3~380	60	—	(J)	196	2610	0.33	91	-40 ~ +80	ERP2026	73	
YSWF68L35P4-□-300	3~380	50	—	(K)	108	1345	0.26	76	-40 ~ +85	ERP2026*	58	
YSWF68L35P4-□-300	3~380	60	—	(L)	106	1596	0.23	41	-40 ~ +85	ERP2026*	62	

1. Specifications might change without notice;

2. Special design on request

1. Specifications might change without notice;

2. Special design on request



Ø 300

AC AXIAL FAN



14

AC INDUSTRIAL FAN

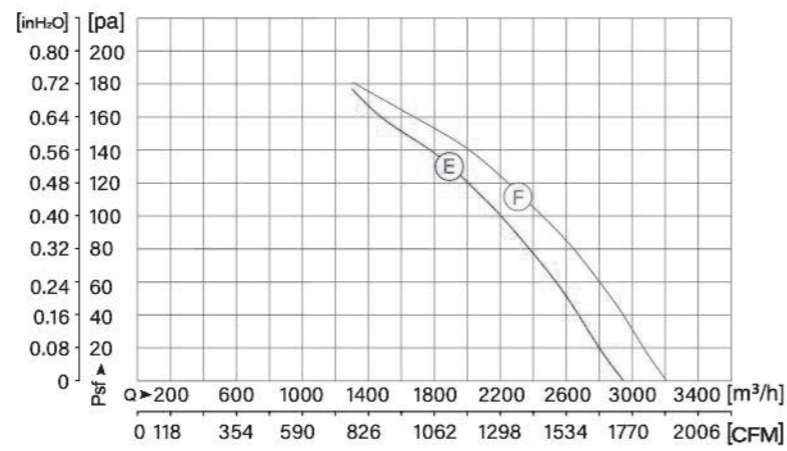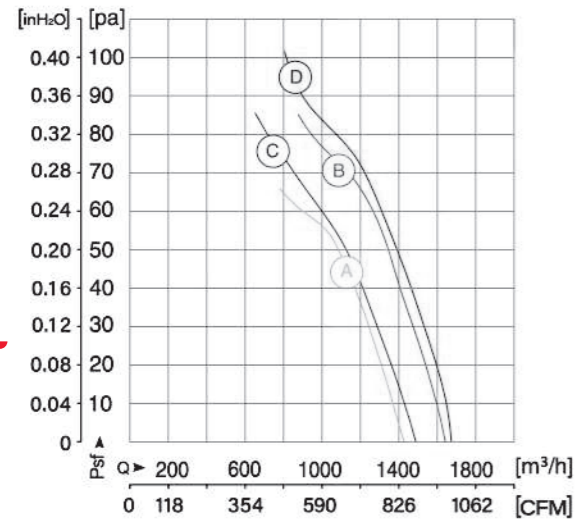

动压 / Dynamic pressure:  $p_d=9.26 \times 10^{-6} \times Q^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF68L35P4-360N-300	1~220	50 60	3	(A) (B)	88 114	1374 1555	0.41 0.52	49 70	-40~+75 -40~+80	ERP2026* ERP2026*	58 62	连体风叶 Siamese fan
YSWF68L35P4-360N-300	3~380	50 60	—	(C) (D)	85 102	1372 1552	0.23 0.21	59 76	-40~+80 -40~+80	ERP2026* ERP2026*	58 62	连体风叶 Siamese fan
YSWF74L34P2-□-300	3~380	50 60	—	(E) (F)	290 388	2537 2637	0.54 0.62	120 141	-40~+70 -40~+70	ERP2026 ERP2026	70 73	—

1. Specifications might change without notice;

2. Special design on request

Ø 300



AC AXIAL FAN



15

AC INDUSTRIAL FAN

叶轮材质: 塑料  
Impeller Material: Plastic

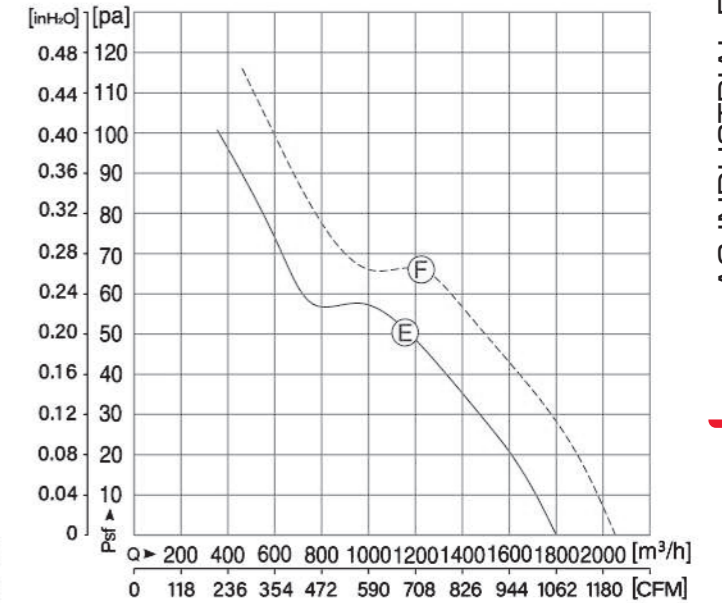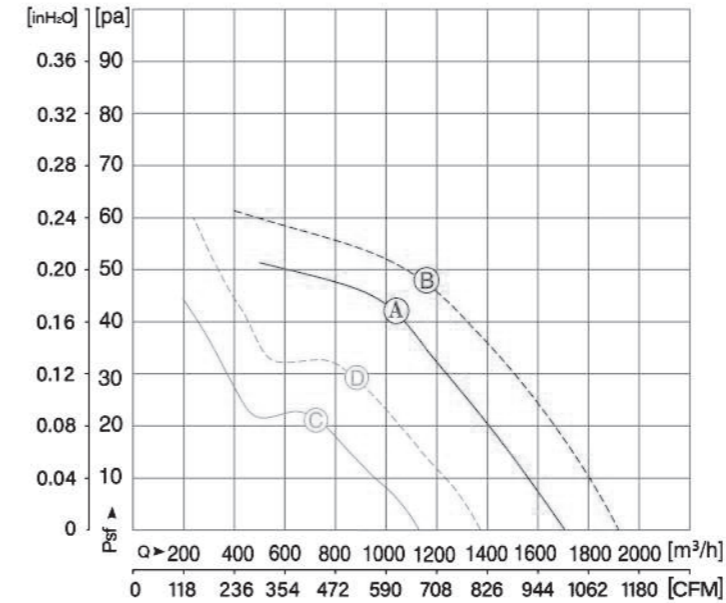

动压 / Dynamic pressure:  $p_d=9.26 \times 10^{-6} \times Q^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF68L35P4-□-300-PA	1~220	50 60	3	(A) (B)	88 109	1329 1456	0.4 0.51	42 48	-40~+75 -40~+75	ERP2026* ERP2026*	57 60	
YDWF68L35P6-□-300-PA	1~220	50 60	2	(C) (D)	49 60	924 1078	0.23 0.27	21 29	-40~+80 -40~+80	ERP2026* ERP2026*	54 55	
YSWF68L35P4-□-300-PA	3~380	50 60	—	(E) (F)	89 104	1365 1547	0.25 0.22	51 66	-40~+80 -40~+80	ERP2026* ERP2026*	58 61	


1. Specifications might change without notice;

2. Special design on request

Ø 300

INSTALLATION ACCESSORIES


□-360P

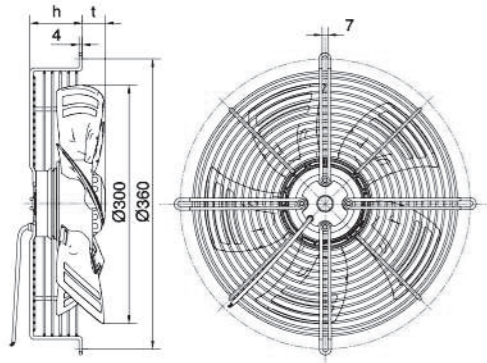

常规凹网罩 Concave grid 360N			
型号 MODEL	h	t	
YDWF67L35P2-360N-300	80	35	
YDWF68L35P4-360N-300	80	35	
YDWF68L35P6-360N-300	80	35	
YSWF68L35P2-360N-300	80	35	
YSWF68L35P4-360N-300	80	35	


平网罩 Flat Screen grid 360P			
型号 MODEL	h	t	
YDWF67L35P2-360P-300	65	25	
YDWF68L35P4-360P-300	65	25	
YSWF68L35P2-360P-300	65	25	
YSWF68L35P4-360P-300	65	25	

□-355H

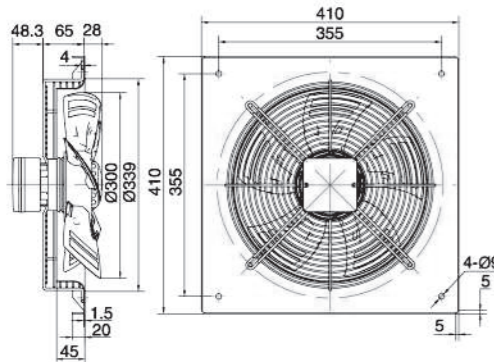

带网风圈 Wall plate 355H			
型号 MODEL			
YDWF67L35P2-355H-300			
YDWF68L35P4-355H-300			
YDWF68L35P6-355H-300			
YSWF68L35P2-355H-300			
YSWF68L35P4-355H-300			

□-345NG

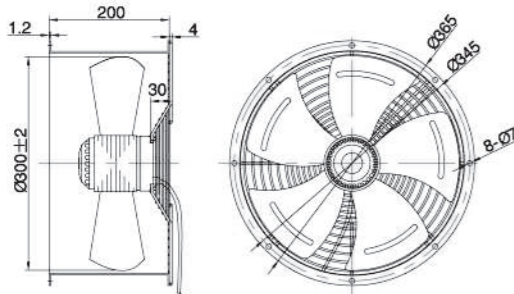



带风筒 Air duct 345NG			
型号 MODEL			
YDWF67L35P2-345NG-300			
YDWF68L35P4-345NG-300			
YDWF68L35P6-345NG-300			
YSWF68L35P2-345NG-300			
YSWF68L35P4-345NG-300			

□-其他安装附件 Others

平网罩 Flat screen grid 360P			平板网罩 Flat net grid 360B			凹板网罩 Concave flat grid 360NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YDWF67L35P2-360P-300	65	25	YDWF67L35P2-360B-300	—	90	YDWF67L35P2-360NB-300	—	120
YDWF68L35P4-360P-300	65	25	YDWF68L35P4-360B-300	—	90	YDWF68L35P4-360NB-300	—	120
YDWF68L35P6-360P-300	65	25	YDWF68L35P6-360B-300	—	90	YDWF68L35P6-360NB-300	—	120
YSWF68L35P2-360P-300	65	25	YSWF68L35P2-360B-300	—	90	YSWF68L35P2-360NB-300	—	120
YSWF68L35P4-360P-300	65	25	YSWF68L35P4-360B-300	—	90	YSWF68L35P4-360NB-300	—	120
YSWF74L34-P2-360P-300	60	47						

Ø 315



AC AXIAL FAN

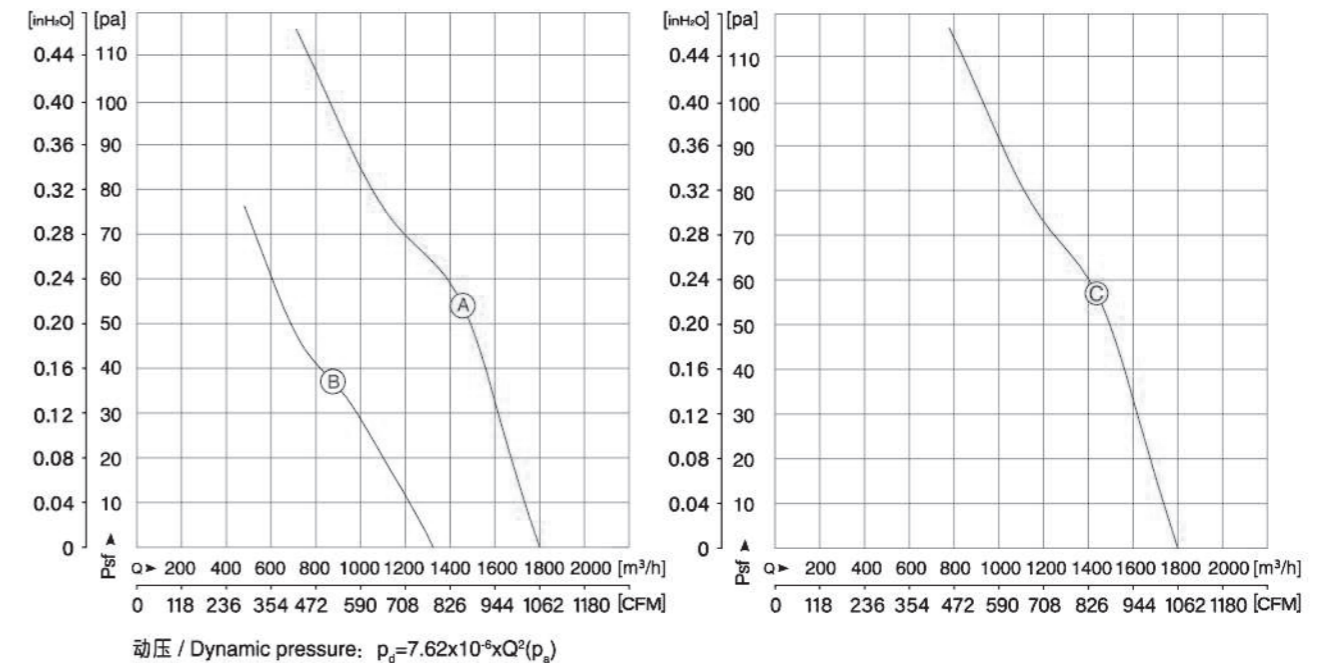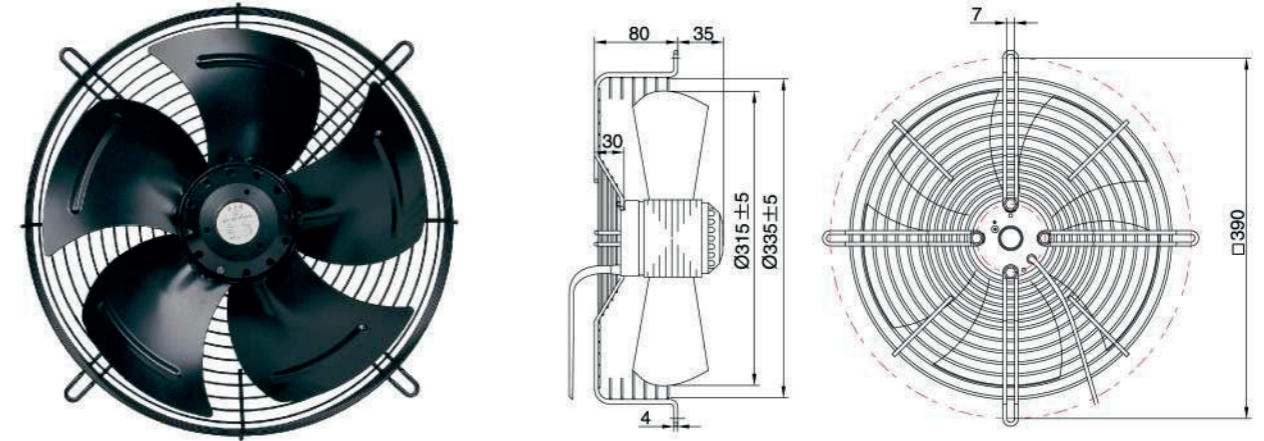

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF68L35P4-390N-315	1~220	50	3	(A)	93	1327	0.42	54	-40~+75	ERP2026*	60	
YDWF68L35P6-390N-315	1~220	50	2	(B)	60	920	0.29	37	-40~+85	ERP2026*	60	
YSWF68L35P4-390N-315	3~380	50	—	(C)	87	1393	0.26	57	-40~+80	ERP2026*	56	

# Ø 330

## AC AXIAL FAN

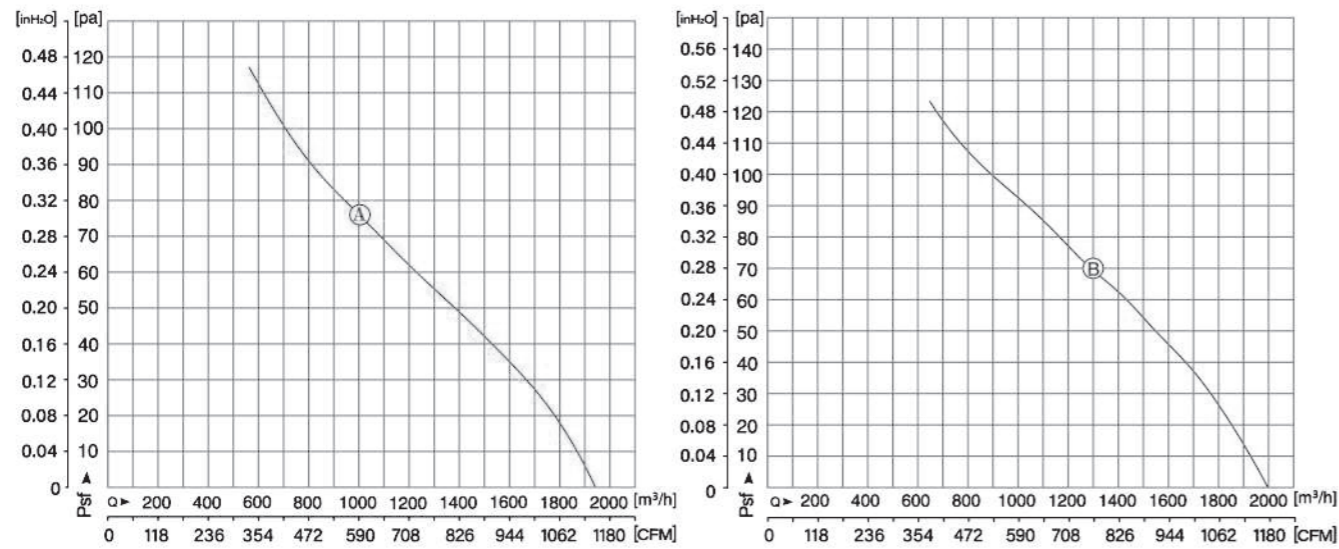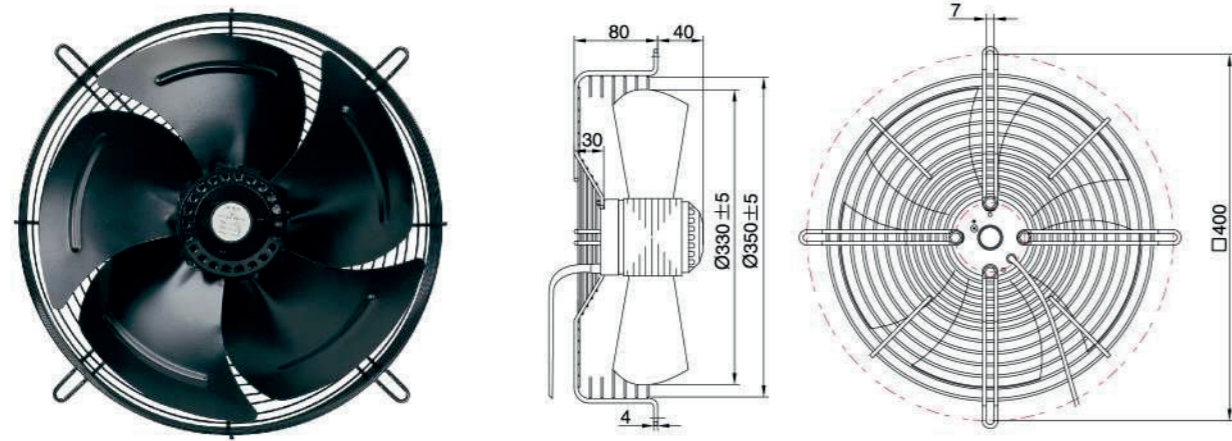


动压 / Dynamic pressure:  $p_d = 6.33 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF68L40P4-400N-330	1~220	50	4	Ⓐ	128	1342	0.63	76	-40~+75	ERP2026	60	
YSWF68L40P4-400N-330	3~380	50	—	Ⓑ	113	1389	0.32	70	-40~+80	ERP2026*	60	

# Ø 350

## AC AXIAL FAN


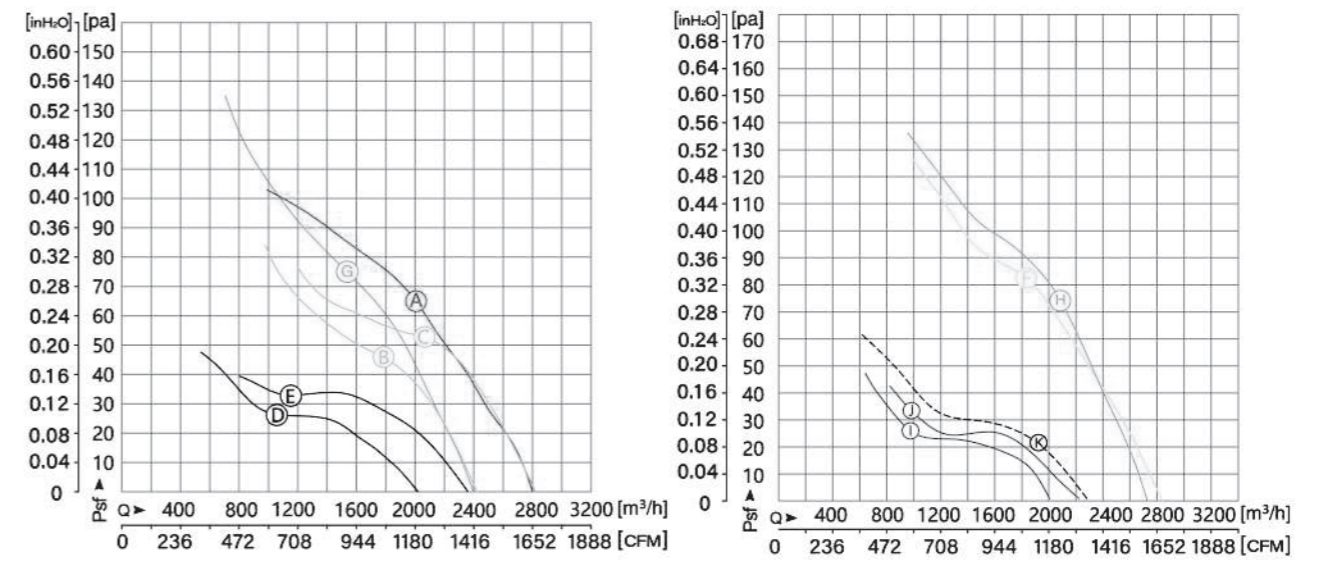


动压 / Dynamic pressure:  $p_d = 5.0 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF74L34P4-□-350	1-220	50	4	Ⓐ	147	1353	0.67	64	-40~+80	ERP2026*	63	
YDWF74L34P4-□-350	1-220	50	4	Ⓑ	118	1387	0.56	46	-40~+80	ERP2026*	62	
YDWF74L34P4-□-350	1-220	60	4	Ⓒ	161	1575	0.73	52	-40~+80	ERP2026	66	
YDWF74L34P6-□-350	1-220	50	4	Ⓓ	77	903	0.35	26	-40~+80	ERP2026*	55	
YDWF74L34P6-□-350	1-220	60	4	Ⓔ	99	1018	0.47	33	-40~+80	ERP2026*	56	
YSWF74L34P4-□-350	3-380	50	—	Ⓕ	164	1374	0.38	83	-40~+80	ERP2026*	63	
YSWF74L34P4-□-350	3-380	50	—	Ⓖ	121	1397	0.28	74	-40~+80	ERP2026*	63	
YSWF74L34P4-□-350	3-380	60	—	Ⓗ	160	1556	0.30	76	-40~+80	ERP2026	66	
YSWF74L34P6-□-350	3-380	50	—	Ⓘ	90	922	0.25	25	-40~+80	ERP2026*	57	
YSWF74L34P6-□-350	3-380	50	—	Ⓙ	92	918	0.26	20	-40~+80	ERP2026*	57	
YSWF74L34P6-□-350	3-380	60	—	Ⓚ	107	1041	0.24	31	-40~+80	ERP2026*	58	

Ø 350

AC AXIAL FAN

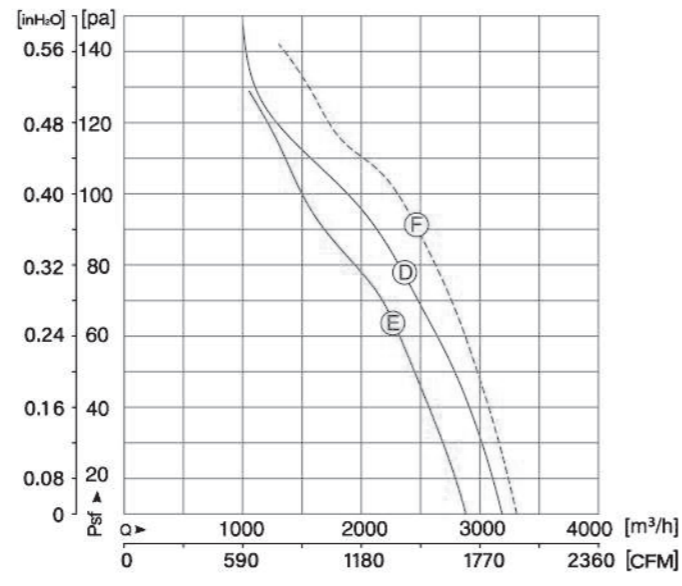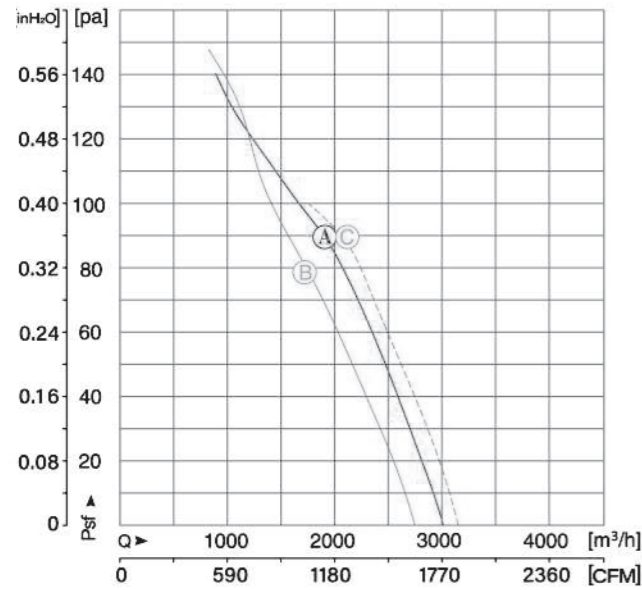

动压 / Dynamic pressure:  $p_d=5.0 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF74L47P4-□-350	1~220	50	6	(A)	192	1381	0.88	90	-40~+70	ERP2026*	64	
YDWF74L47P4-□-350	1~220	50	6	(B)	173	1375	0.82	79	-40~+80	ERP2026	63	
YDWF74L47P4-□-350	1~220	60	6	(C)	242	1533	1.09	90	-40~+80	ERP2026	65	
YSWF74L47P4-□-350	3~380	50	—	(D)	195	1383	0.46	77	-40~+80	ERP2026	64	
YSWF74L47P4-□-350	3~380	50	—	(E)	163	1397	0.44	64	-40~+90	ERP2026	62	
YSWF74L47P4-□-350	3~380	60	—	(F)	233	1584	0.45	92	-40~+90	ERP2026	65	

1. Specifications might change without notice;


2. Special design on request

Ø 350

AC AXIAL FAN



叶轮材质: 塑料  
Impeller Material: Plastic

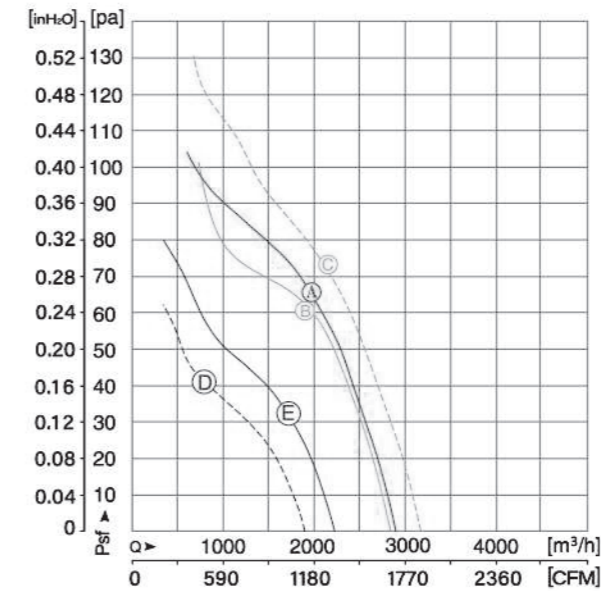

动压 / Dynamic pressure:  $p_d=5.0 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF74L34P4-□-350-PA	1~220	50	4	(A)	162	1329	0.67	65	-40~+70	ERP2026	62	
YSWF74L34P4-□-350-PA	3~380	50	—	(B)	154	1364	0.35	61	-40~+70	ERP2026	61	
YSWF74L34P4-□-350-PA	3~380	60	—	(C)	211	1501	0.38	73	-40~+70	ERP2026	64	
YSWF74L34P6-□-350-PA	3~380	50	—	(D)	83	935	0.25	32	-40~+85	ERP2026*	56	
YSWF74L34P6-□-350-PA	3~380	60	—	(E)	92	1077	0.23	41	-40~+85	ERP2026*	57	

1. Specifications might change without notice;

2. Special design on request

# Ø 350


## INSTALLATION ACCESSORIES

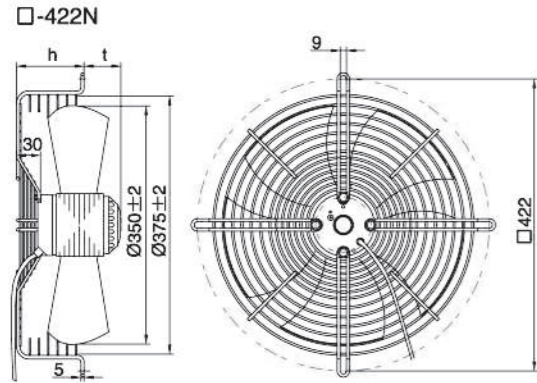


常规凹网罩 Concave grid 422N			
型号 MODEL	h	t	
YD(S)WF74L34P4-422N-350	80	52	
YD(S)WF74L34P6-422N-350	80	52	
YD(S)WF74L47P4-422N-350	80	67	

平网罩 Flat Screen grid 422P			
型号 MODEL	h	t	
YDWF74L34P4-422P-350	75	32	
YSWF74L35P4-422P-350	75	32	
YD(S)WF74L47P4-422P-350	75	45	

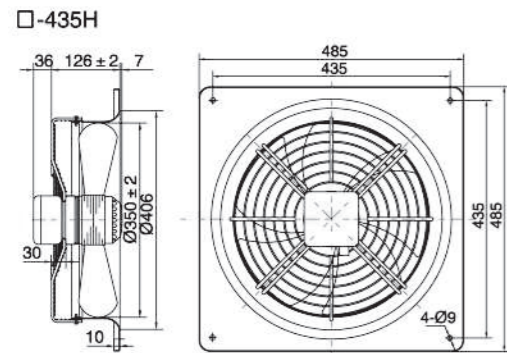

带导风圈 Wall plate 435H			
型号 MODEL			
YD(S)WF74L34P4-435H-350			
YD(S)WF74L34P6-435H-350			
YD(S)WF74L47P4-435H-350			

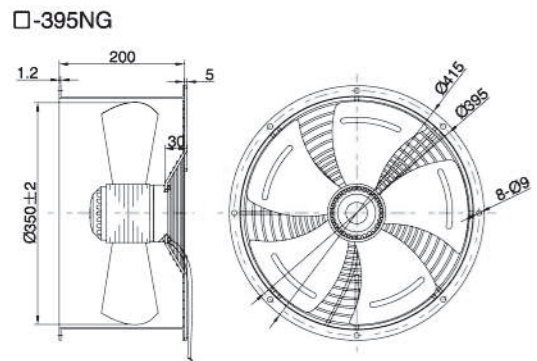




带风筒 Air duct 395NG			
型号 MODEL			
YD(S)WF74L34P4-395NG-350			
YD(S)WF74L34P6-395NG-350			
YD(S)WF74L47P4-395NG-350			

### □-其他安装附件 Others

平网罩 Flat screen grid 422P75			平板网罩 Flat net grid 422B			凹板网罩 Concave flat grid 422NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF74L34P4-422P-350	75	32	YD(S)WF74L34P4-422B-350	—	107	YD(S)WF74L34P4-422NB-350	—	132
YD(S)WF74L34P6-422P-350	75	32	YD(S)WF74L34P6-422B-350	—	107	YD(S)WF74L34P6-422NB-350	—	132
YD(S)WF74L47P4-422P-350	75	47	YD(S)WF74L47P4-422B-350	—	122	YD(S)WF74L47P4-422NB-350	—	147

# Ø 380


## AC AXIAL FAN

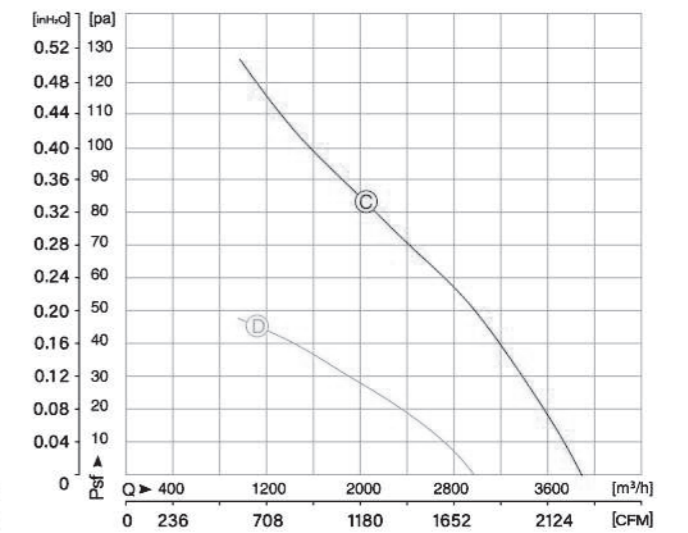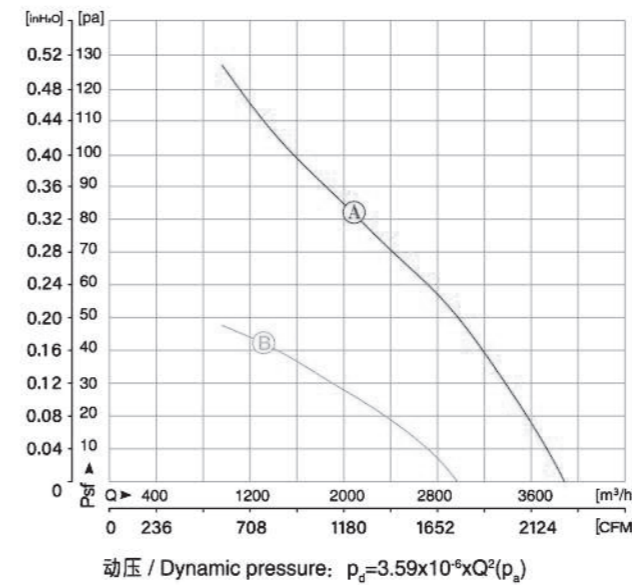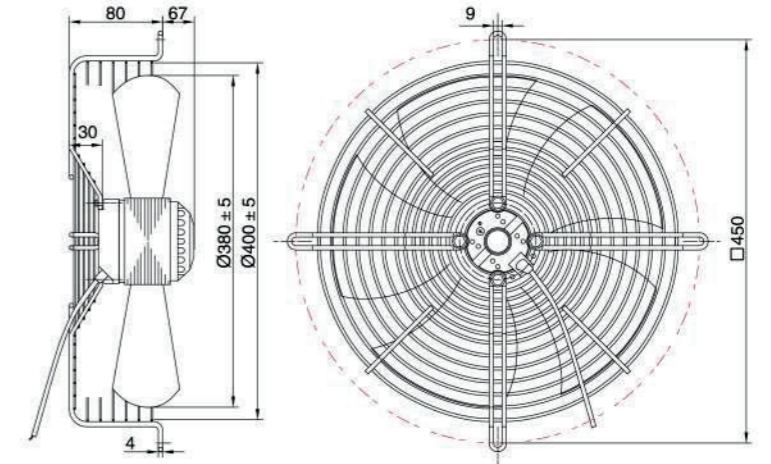


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF74L47P4-450N-380	1~220	50	6	A	185	1410	0.85	81	-40~+75	ERP2026	64	
YDWF74L47P6-450N-380	1~220	50	5	B	110	925	0.55	43	-40~+80	ERP2026*	56	
YSWF74L47P4-450N-380	3~380	50	—	C	185	1410	0.46	83	-40~+85	ERP2026	64	
YSWF74L47P6-450N-380	3~380	50	—	D	110	925	0.35	45	-40~+85	ERP2026*	56	

Ø 400

AC AXIAL FAN

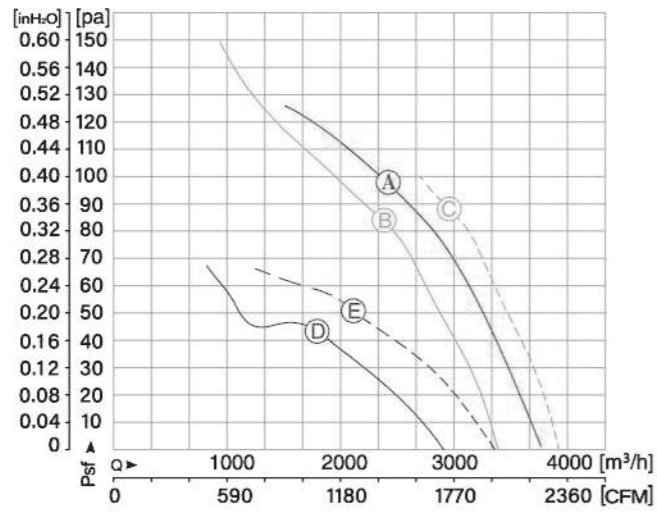


动压 / Dynamic pressure:  $p_d = 2.93 \times 10^{-6} \times Q^2 (p_a)$

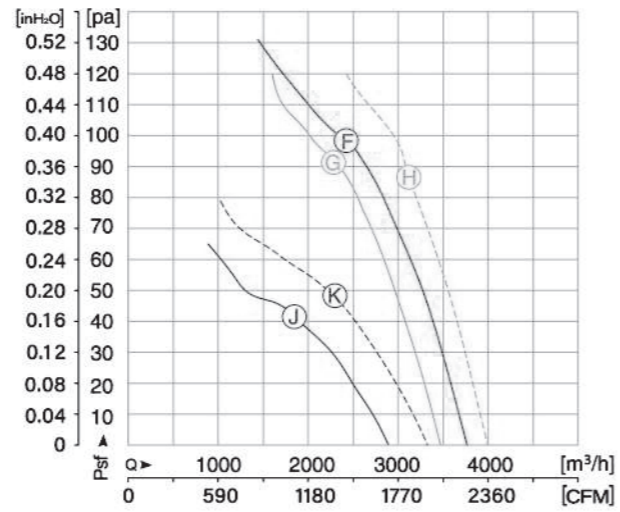


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF74L47P4-□-400	1~220	50	6	(A)	219	1352	1.00	99	-40~+75	ERP2026*	68	
YDWF74L47P4-□-400	1~220	50	6	(B)	179	1378	0.84	84	-40~+80	ERP2026*	67	
YDWF74L47P4-□-400	1~220	60	6	(C)	241	1564	1.10	88	-40~+80	ERP2026*	69	
YDWF74L47P6-□-400	1~220	50	5	(D)	113	909	0.52	46	-40~+75	ERP2026*	58	
YDWF74L47P6-□-400	1~220	60	5	(E)	145	1040	0.68	51	-40~+75	ERP2026	59	
YSWF74L47P4-□-400	3~380	50	—	(F)	216	1362	0.46	97	-40~+80	ERP2026*	68	
YSWF74L47P4-□-400	3~380	50	—	(G)	186	1383	0.44	93	-40~+90	ERP2026*	67	
YSWF74L47P4-□-400	3~380	60	—	(H)	238	1587	0.45	87	-40~+90	ERP2026*	69	
YSWF74L47P6-□-400	3~380	50	—	(J)	118	922	0.35	41	-40~+80	ERP2026*	58	
YSWF74L47P6-□-400	3~380	60	—	(K)	146	1055	0.33	48	-40~+80	ERP2026	60	

Ø 400

AC AXIAL FAN

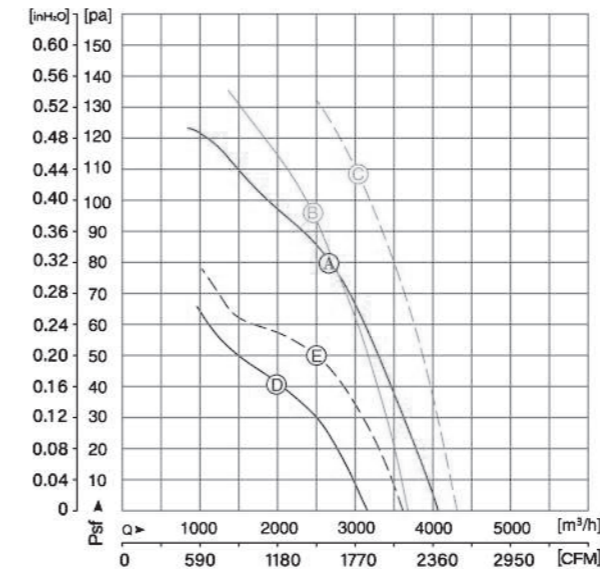



动压 / Dynamic pressure:  $p_d = 2.93 \times 10^{-6} \times Q^2 (p_a)$

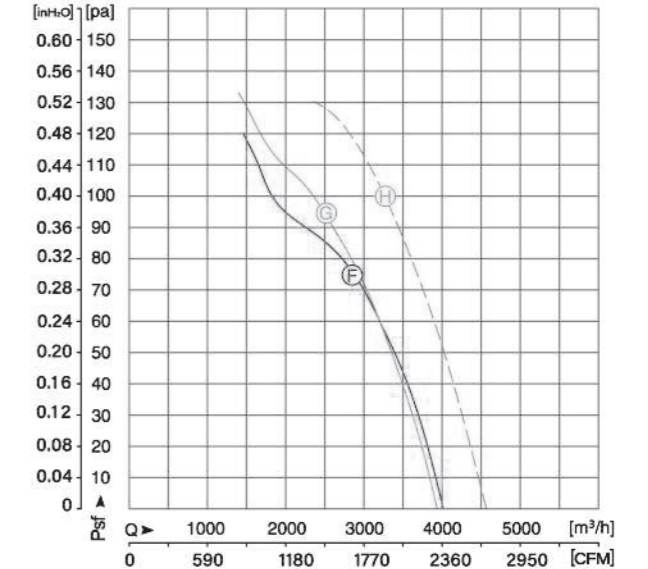



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF74L60P4-□-400	1~220	50	8	(A)	239	1353	1.09	80	-40~+80	ERP2026	68	
YDWF74L60P4-□-400	1~220	50	8	(B)	222	1398	1.00	97	-40~+85	ERP2026*	67	
YDWF74L60P4-□-400	1~220	60	8	(C)	292	1603	1.34	108	-40~+80	ERP2026*	70	
YDWF74L60P6-□-400	1~220	50	6	(D)	139	907	0.67	42	-40~+75	ERP2026	59	
YDWF74L60P6-□-400	1~220	60	6	(E)	167	1045	0.76	50	-40~+75	ERP2026	61	
YSWF74L60P4-□-400	3~380	50	—	(F)	227	1382	0.52	76	-40~+80	ERP2026*	68	
YSWF74L60P4-□-400	3~380	50	—	(G)	223	1384	0.52	94	-40~+80	ERP2026*	67	
YSWF74L60P4-□-400	3~380	60	—	(H)	307	1575	0.57	101	-40~+75	ERP2026*	70	

Ø 400

AC AXIAL FAN

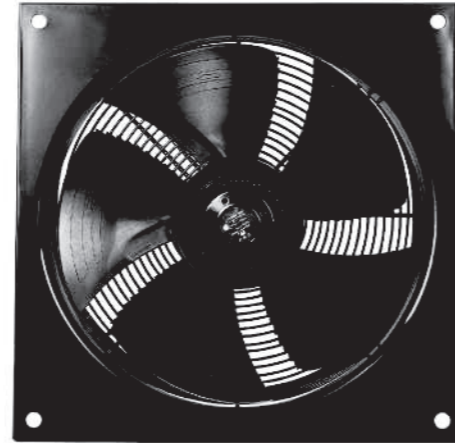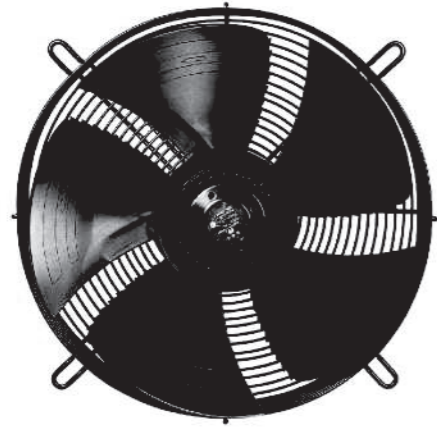



叶轮材质: 塑料  
Impeller Material: Plastic

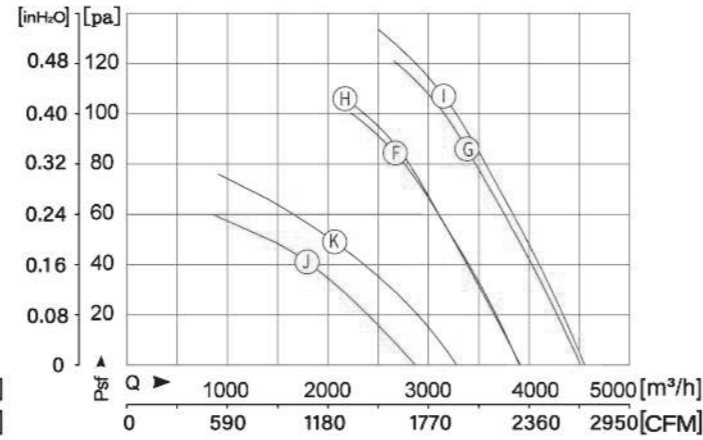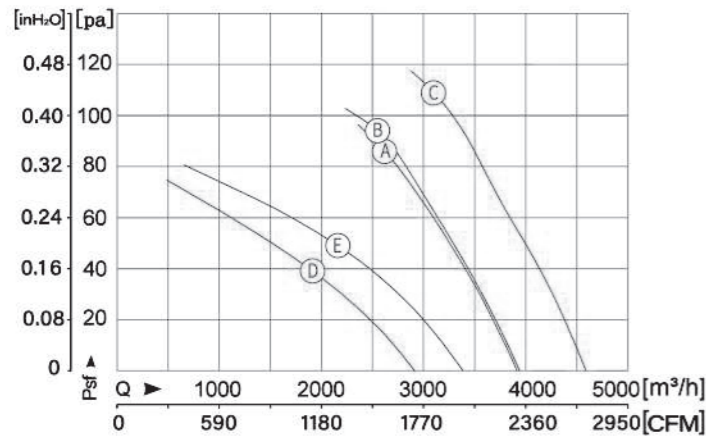

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF74L47P4-□-400PA	1~220	50	6	(A)	207	1377	0.96	86	-40~+80	ERP2026*	70	
YDWF74L60P4-□-400PA	1~220	50	8	(B)	214	1381	0.98	94	-40~+80	ERP2026*	70	AC400塑料风叶(二代) AC400 Plastic vane (second generation)
		60	8	(C)	300	1576	1.40	109	-40~+75	ERP2026*	72	
YDWF74L47P6-□-400PA	1~220	50	5	(D)	120	915	0.57	39	-40~+80	ERP2026*	58	EC400塑料风叶(二代) EC400 Plastic vane (second generation)
		60	5	(E)	154	1019	0.68	49	-40~+80	ERP2026	60	
YSWF74L47P4-□-400PA	3~380	50	—	(F)	202	1383	0.50	85	-40~+80	ERP2026*	70	AC400塑料风叶(二代) AC400 Plastic vane (second generation)
		60	—	(G)	280	1546	0.53	106	-40~+75	ERP2026*	72	
YSWF74L60P4-□-400PA	3~380	50	—	(H)	203	1399	0.53	86	-40~+80	ERP2026*	70	AC400塑料风叶(二代) AC400 Plastic vane (second generation)
		60	—	(I)	287	1599	0.56	107	-40~+75	ERP2026*	72	
YSWF74L47P6-□-400PA	3~380	50	—	(J)	126	919	0.36	41	-40~+80	ERP2026	58	EC400塑料风叶(二代) EC400 Plastic vane (second generation)
		60	—	(K)	157	1033	0.34	49	-40~+80	ERP2026	60	

Ø 400

AC AXIAL FAN

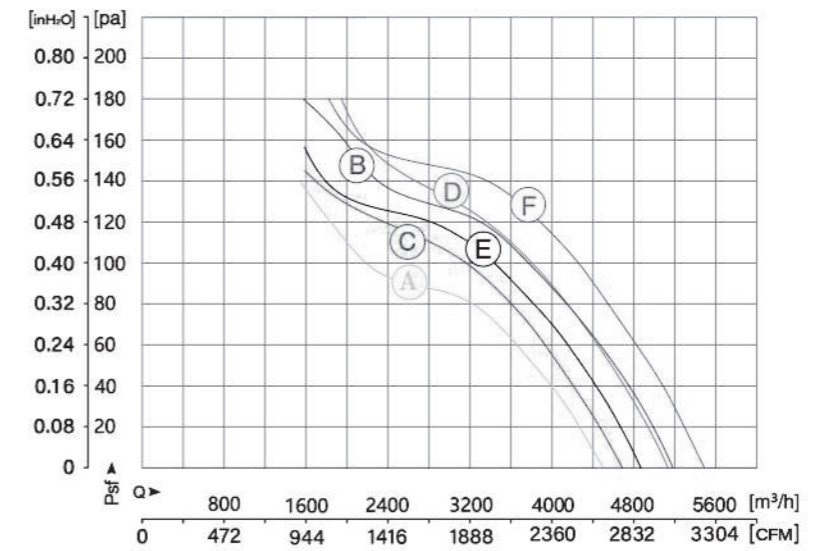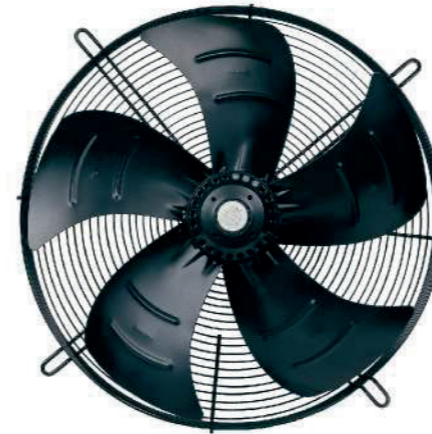


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF102L35P4-□-400	1~230	50	10	(A)	318	1410	1.40	81	-40~+70	ERP2026	59	
		60	10	(B)	482	1597	2.14	121	-40~+70	ERP2026	60	
YSWF102L35P4-□-400	3~380	50	—	(C)	321	1393	0.72	102	-40~+70	ERP2026*	59	
		60	—	(D)	456	1585	0.82	120	-40~+70	ERP2026	60	
YSWF102L35P4-□-400-7	3~380	50	—	(E)	367	1373	0.77	103	-40~+70	ERP2026*	58	
		60	—	(F)	543	1531	0.94	120	-40~+70	ERP2026	69	

Ø 400


INSTALLATION ACCESSORIES

□-470N

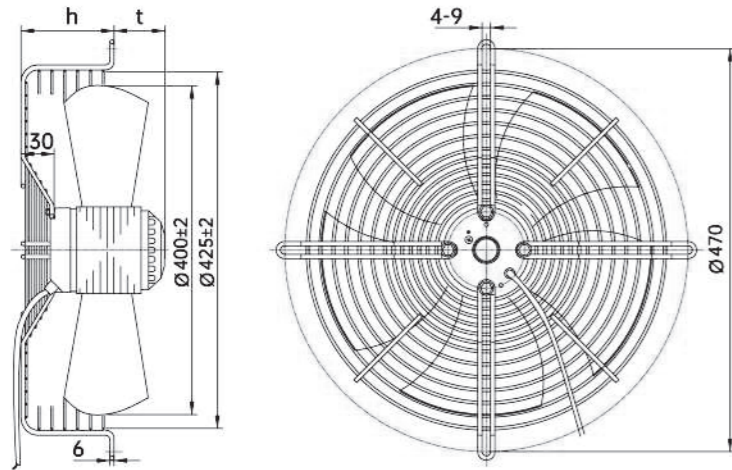

常规凹网罩 Concave grid 470N			
型号 MODEL	h	t	
YSWF102L35-P4-470N-400	90	55	
YDWF102L35-P4-470N-400	90	55	
YSWF102L35-P4-470N-400-7	90	55	

□-490H

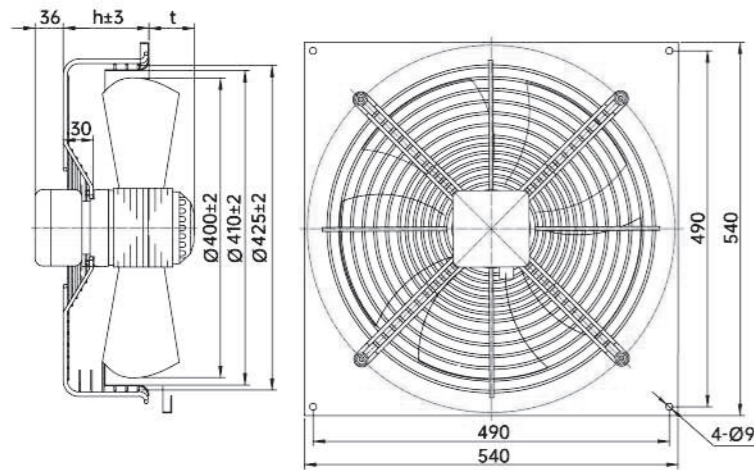


带导风圈 Wall plate 490H			
型号 MODEL	h	t	
YSWF102L35-P4-490H-400	90	55	
YDWF102L35-P4-490H-400	90	55	
YSWF102L35-P4-490H-400-7	90	55	

Ø 400


INSTALLATION ACCESSORIES

□-470N

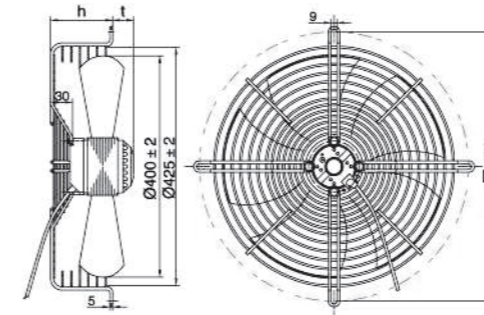


常规凹网罩 Concave grid 470N			
型号 MODEL	h	t	
YD(S)WF74L47P4-470N-400	90	57	
YD(S)WF74L47P6-470N-400	90	57	
YD(S)WF74L60P4-470N-400	90	70	
YD(S)WF74L60P6-470N-400	90	70	

□-490H

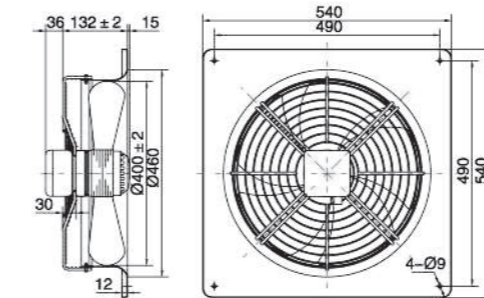

带导风圈 Wall plate 490H			
型号 MODEL			
YD(S)WF74L47P4-490H-400			
YD(S)WF74L47P6-490H-400			
YD(S)WF74L60P4-490H-400			
YD(S)WF74L60P6-490H-400			

□-440NG

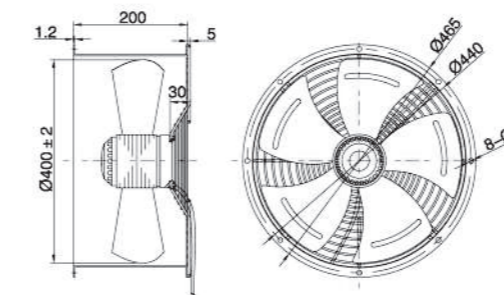



带风筒 Air duct 440NG			
型号 MODEL			
YD(S)WF74L47P4-440NG-400			
YD(S)WF74L47P6-440NG-400			
YD(S)WF74L60P4-440NG-400			
YD(S)WF74L60P6-440NG-400			

□-其他安装附件 Others

平网罩 Flat screen grid 470P			平板网罩 Flat net grid 470B			凹板网罩 Concave flat grid 470NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF74L47P4-470P-400	90	32	YD(S)WF74L47P4-470B-400	—	122	YD(S)WF74L47P4-470NB-400	—	147
YD(S)WF74L47P6-470P-400	90	32	YD(S)WF74L47P6-470B-400	—	122	YD(S)WF74L47P6-470NB-400	—	147
YD(S)WF74L60P4-470P-400	90	45	YD(S)WF74L60P4-470B-400	—	135	YD(S)WF74L60P4-470NB-400	—	160
YD(S)WF74L60P6-470P-400	90	45	YD(S)WF74L60P6-470B-400	—	135	YD(S)WF74L60P6-470NB-400	—	160

# Ø 420

## AC AXIAL FAN

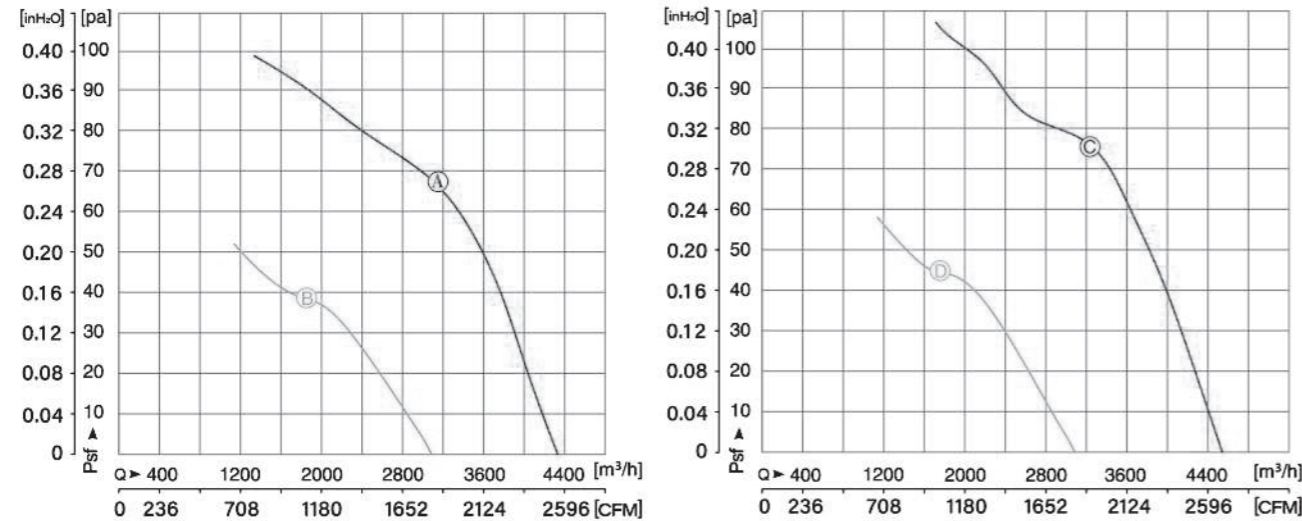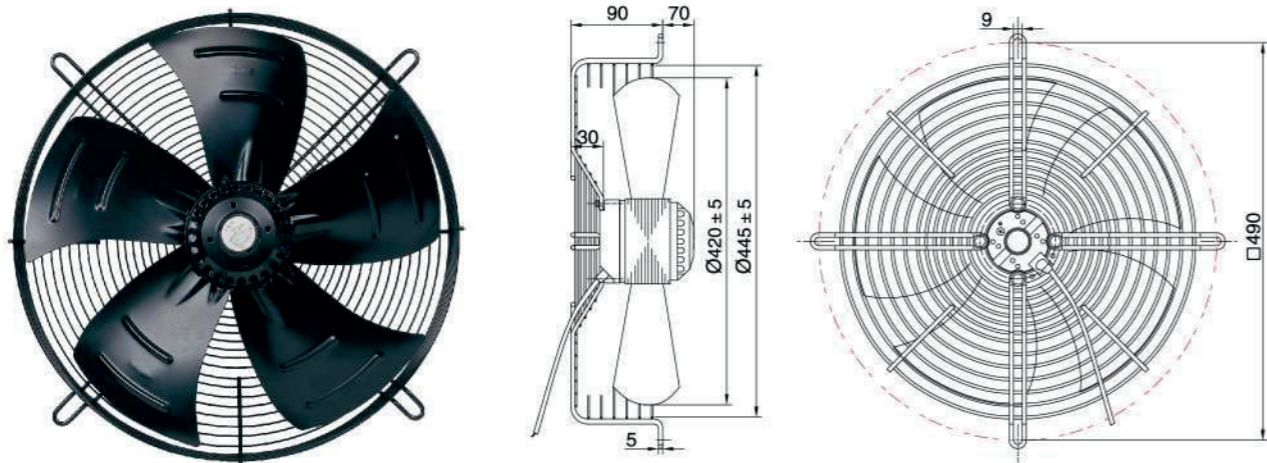


动压 / Dynamic pressure:  $p_d = 2.41 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF74L60P4-490N-420	1~220	50	8	(A)	250	1341	1.11	67	-40~+80	ERP2026	68	
YDWF74L60P6-490N-420	1~220	50	6	(B)	150	892	0.72	38	-40~+75	ERP2026	59	
YSWF74L60P4-490N-420	3~380	50	—	(C)	251	1372	0.57	76	-40~+80	ERP2026*	68	
YSWF74L60P6-490N-420	3~380	50	—	(D)	155	910	0.51	45	-40~+75	ERP2026	59	

# Ø 450

## AC AXIAL FAN

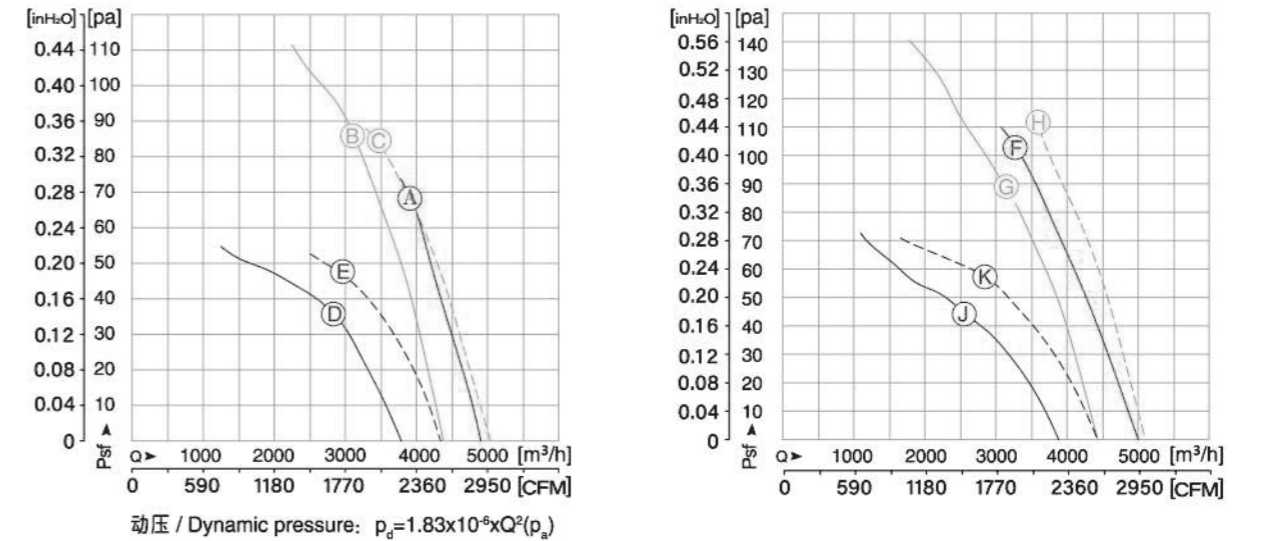

动压 / Dynamic pressure:  $p_d = 1.83 \times 10^{-6} \times Q^2 (p_a)$



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF74L60P4-□-450	1~220	50	8	(A)	249	1339	1.13	68	-40~+80	ERP2026*	69	
YDWF74L60P4-□-450	1~220	50	8	(B)	249	1362	1.14	86	-40~+80	ERP2026*	68	
YDWF74L60P4-□-450	1~220	60	8	(C)	355	1424	1.61	85	-40~+80	ERP2026	69	
YDWF74L60P6-□-450	1~220	50	6	(D)	149	891	0.70	36	-40~+70	ERP2026	60	
YDWF74L60P6-□-450	1~220	60	6	(E)	191	981	0.87	47	-40~+75	ERP2026	62	
YSWF74L60P4-□-450	3~380	50	—	(F)	290	1328	0.59	103	-40~+70	ERP2026*	69	
YSWF74L60P4-□-450	3~380	50	—	(G)	240	1371	0.54	91	-40~+80	ERP2026*	68	
YSWF74L60P4-□-450	3~380	60	—	(H)	344	1541	0.63	112	-40~+80	ERP2026*	69	
YSWF74L60P6-□-450	3~380	50	—	(J)	166	912	0.51	45	-40~+75	ERP2026	60	
YSWF74L60P6-□-450	3~380	60	—	(K)	210	1029	0.46	58	-40~+80	ERP2026	62	

Ø 450

AC AXIAL FAN



叶轮材质: 塑料  
Impeller Material: Plastic

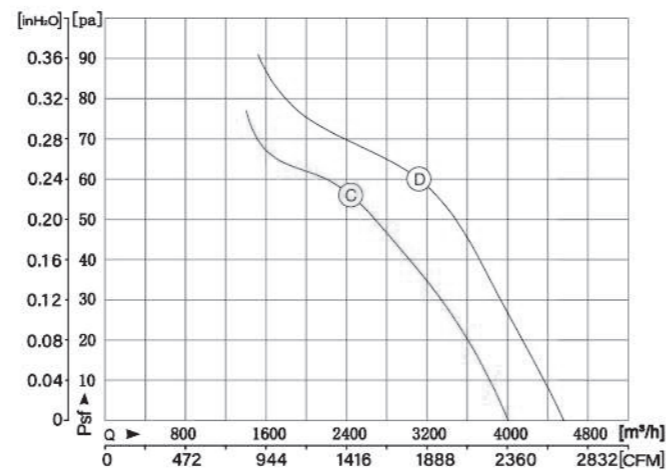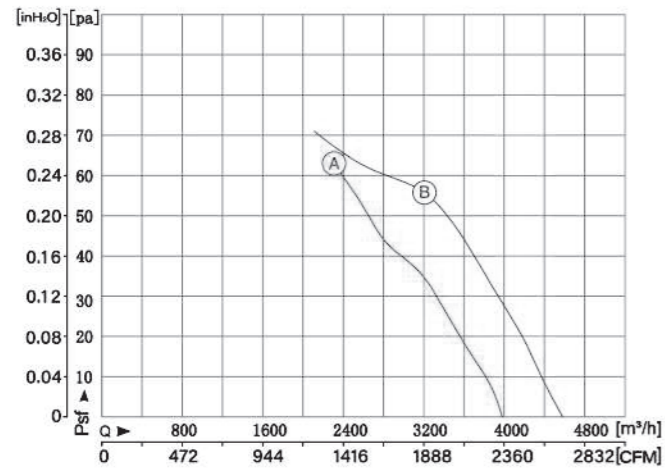


动压 / Dynamic pressure:  $p_d = 1.83 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF74L60P6-□-450-PA	1~220	50	6	Ⓐ	176	888	0.81	63	-40~+70	ERP2026	58	塑料风叶(二代) Plastic vane (second generation)
		60		Ⓑ	230	1000	1.06	57	-40~+70	ERP2026	60	
YSWF74L60P6-□-450-PA	1~380	50	—	Ⓒ	182	899	0.50	56	-40~+75	ERP2026	58	塑料风叶(二代) Plastic vane (second generation)
		60		Ⓓ	223	1011	0.49	60	-40~+75	ERP2026	60	

Ø 450


INSTALLATION ACCESSORIES

□-522N

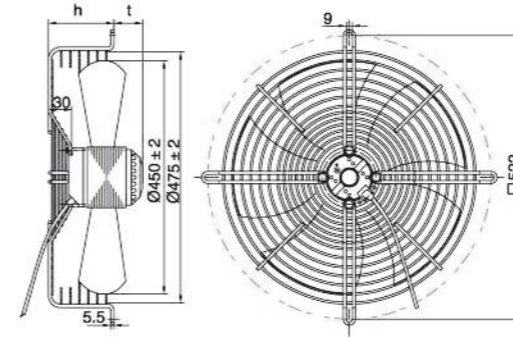


常规凹网罩 Concave grid 522N			
型号 MODEL	h	t	
YD(S)WF74L60P4-522N-450	90	70	
YD(S)WF74L60P6-522N-450	90	70	

□-535H

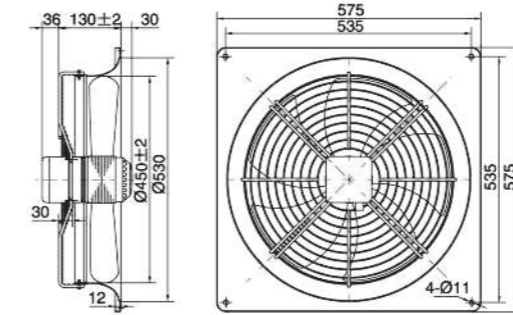

带导风圈 Wall plate 535H			
型号 MODEL			
YD(S)WF74L60P4-535H-450			
YD(S)WF74L60P6-535H-450			

□-495NG

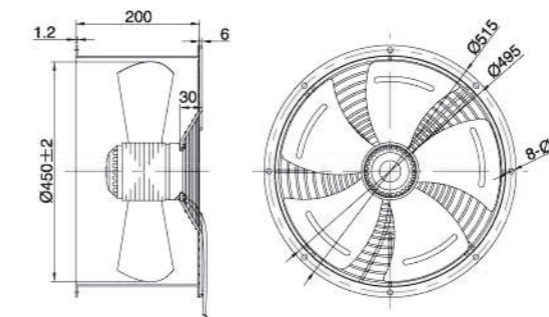



带风筒 Air duct 495NG			
型号 MODEL			
YD(S)WF74L60P4-495NG-450			
YD(S)WF74L60P6-495NG-450			

□-其他安装附件 Others

平板网罩 Flat net grid 522B				凹板网罩 Concave flat grid 522NB			
型号 MODEL	h	t		型号 MODEL	h	t	
YD(S)WF74L60P4-522B-450	—	136		YD(S)WF74L60P4-522NB-450	—	160	
YD(S)WF74L60P6-522B-450	—	136		YD(S)WF74L60P6-522NB-450	—	160	

Ø 450

AC AXIAL FAN

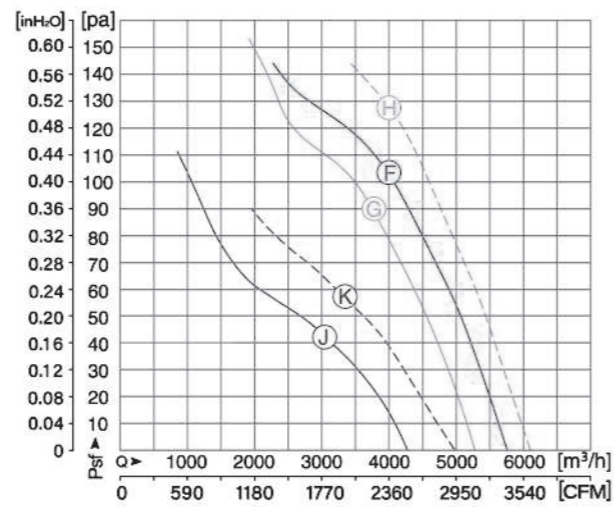
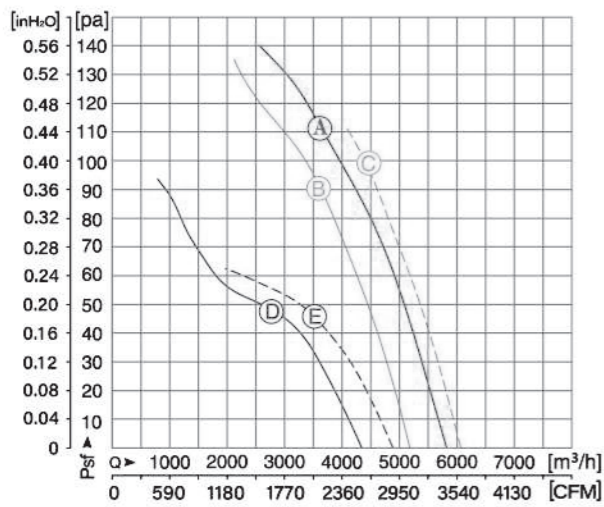


动压 / Dynamic pressure:  $p_d = 1.83 \times 10^{-6} \times Q^2 (p_s)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L35P4-□-450	1~220	50	10	(A)	415	1354	1.81	113	-40~+80	ERP2026	71	
YDWF102L35P4-□-450	1~220	50	10	(B)	316	1386	1.44	91	-40~+85	ERP2026*	69	
		60		(C)	482	1537	2.19	101	-40~+85	ERP2026	72	
YDWF102L35P6-□-450	1~220	50	8	(D)	188	903	0.86	49	-40~+85	ERP2026	64	
		60		(E)	251	999	1.17	45	-40~+85	ERP2026	66	
YSWF102L35P4-□-450	3~380	50	—	(F)	391	1365	0.78	103	-40~+85	ERP2026*	70	
		50		(G)	320	1392	0.68	91	-40~+85	ERP2026*	69	
YSWF102L35P4-□-450	3~380	60	—	(H)	490	1565	0.85	127	-40~+80	ERP2026*	72	
		50		(J)	191	933	0.51	41	-40~+80	ERP2026	64	
YSWF102L35P6-□-450	3~380	60	—	(K)	269	1059	0.53	57	-40~+80	ERP2026	66	

Ø 450

AC AXIAL FAN

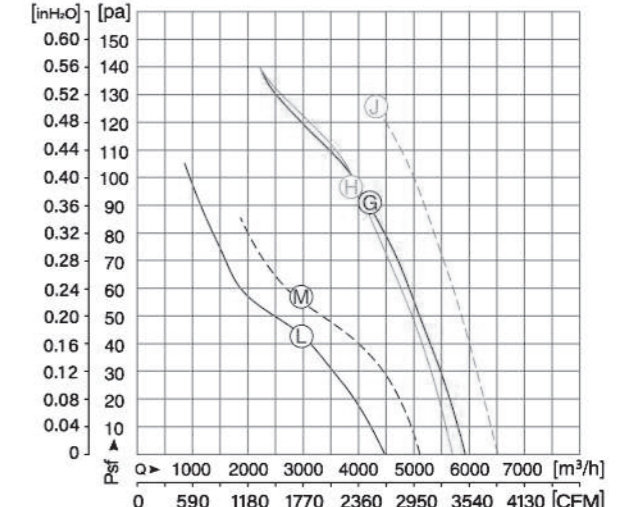
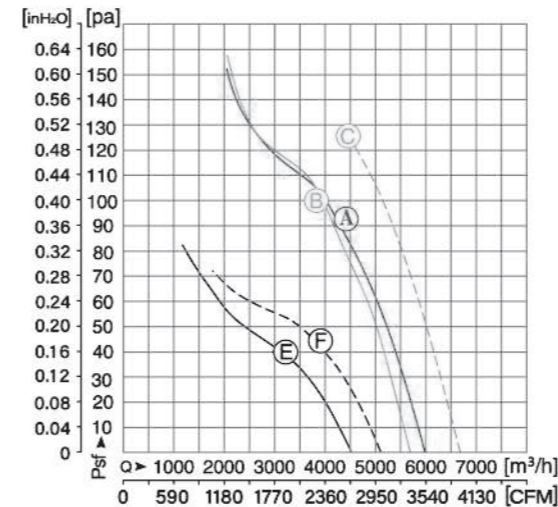


动压 / Dynamic pressure:  $p_d = 1.83 \times 10^{-6} \times Q^2 (p_s)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L40P4-□-450	1~220	50	12	(A)	421	1381	1.92	94	-40~+80	ERP2026	72	
YDWF102L40P4-□-450	1~220	50	12	(B)	389	1430	1.70	103	-40~+80	ERP2026*	71	
		60		(C)	594	1566	2.60	128	-40~+80	ERP2026	74	
YDWF102L40P6-□-450	1~220	50	10	(E)	212	912	0.97	41	-40~+80	ERP2026	65	
		60		(F)	287	1020	1.35	45	-40~+70	ERP2026	66	
YSWF102L40P4-□-450	3~380	50	—	(G)	400	1365	0.77	91	-40~+80	ERP2026	72	
YSWF102L40P4-□-450	3~380	50	—	(H)	368	1381	0.75	94	-40~+80	ERP2026*	71	
		60		(J)	562	1546	0.96	126	-40~+75	ERP2026	74	
YSWF102L40P6-□-450	3~380	50	—	(L)	200	930	0.54	43	-40~+80	ERP2026	65	
		60		(M)	281	1062	0.57	58	-40~+80	ERP2026	66	

Ø 450

AC AXIAL FAN

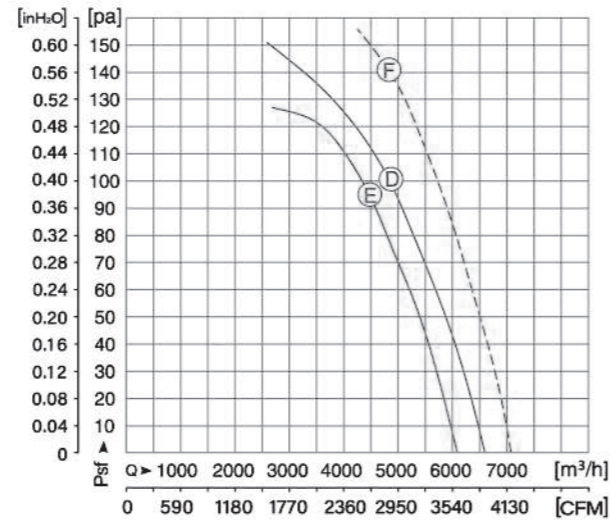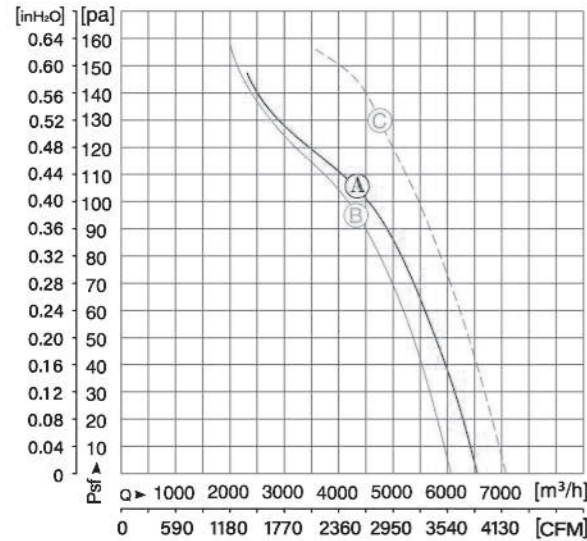


动压 / Dynamic pressure:  $p_d = 1.83 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L45P4-□-450	1~220	50	16	(A)	521	1387	2.36	108	-40~+80	ERP2026	73	
YDWF102L45P4-□-450	1~220	50	16	(B)	438	1412	2.00	97	-40~+85	ERP2026	71	
YDWF102L45P4-□-450	1~220	60	16	(C)	676	1600	3.09	130	-40~+80	ERP2026	74	
YSWF102L45P4-□-450	3~380	50	—	(D)	498	1404	1.11	102	-40~+80	ERP2026	73	
YSWF102L45P4-□-450	3~380	50	—	(E)	433	1419	1.00	96	-40~+85	ERP2026	71	
YSWF102L45P4-□-450	3~380	60	—	(F)	667	1627	1.18	141	-40~+80	ERP2026	74	

Ø 450


INSTALLATION ACCESSORIES

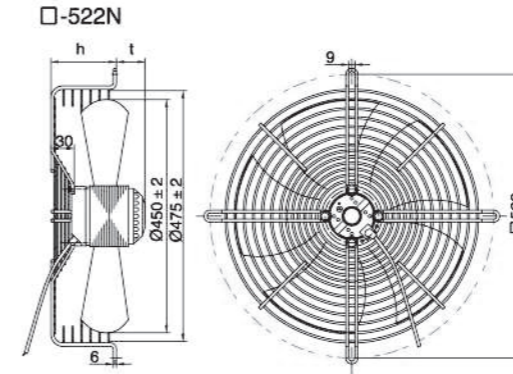

常规凹网罩 Concave grid 522N			
型号 MODEL	h	t	
YD(S)WF102L35P4-522N-450	90	55	
YD(S)WF102L35P6-522N-450	90	55	
YD(S)WF102L40P4-522N-450	90	60	
YD(S)WF102L40P6-522N-450	90	60	
YD(S)WF102L45P4-522N-450	90	65	
YD(S)WF102L45P6-522N-450	90	65	

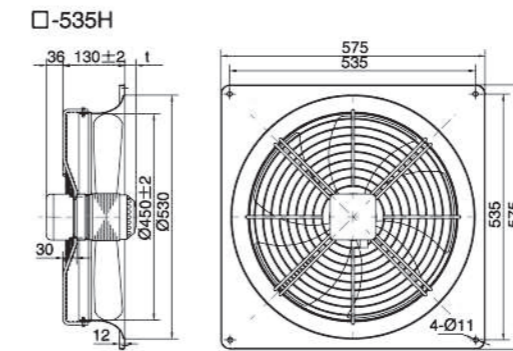

带导风圈 Wall plate 535H		
型号 MODEL	t	
YD(S)WF102L35P4-535H-450	15	
YD(S)WF102L35P6-535H-450	15	
YD(S)WF102L40P4-535H-450	20	
YD(S)WF102L40P6-535H-450	20	
YD(S)WF102L45P4-535H-450	25	
YD(S)WF102L45P6-535H-450	25	

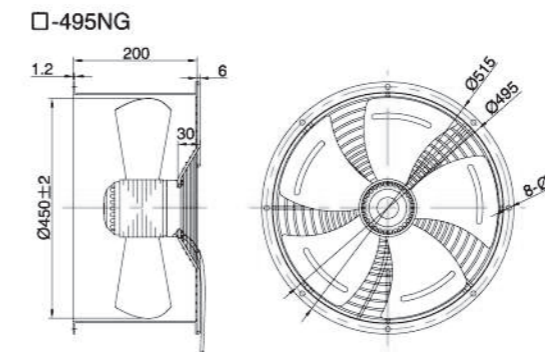



带风筒 Air duct 495NG	
型号 MODEL	
YD(S)WF102L35P4-495NG-450	
YD(S)WF102L35P6-495NG-450	
YD(S)WF102L40P4-495NG-450	
YD(S)WF102L40P6-495NG-450	
YD(S)WF102L45P4-495NG-450	
YD(S)WF102L45P6-495NG-450	

□-其他安装附件 Others

平板网罩 Flat screen grid 522B				凹板网罩 Concave flat grid 522NB			
型号 MODEL	h	t		型号 MODEL	h	t	
YD(S)WF102L35P4-522B-450	—	121		YD(S)WF102L35P4-522NB-450	—	145	
YD(S)WF102L35P6-522B-450	—	121		YD(S)WF102L35P6-522NB-450	—	145	
YD(S)WF102L40P4-522B-450	—	126		YD(S)WF102L40P4-522NB-450	—	150	
YD(S)WF102L40P6-522B-450	—	126		YD(S)WF102L40P6-522NB-450	—	150	
YD(S)WF102L45P4-522B-450	—	131		YD(S)WF102L45P4-522NB-450	—	155	
YD(S)WF102L45P6-522B-450	—	131		YD(S)WF102L45P6-522NB-450	—	155	

Ø 500

AC AXIAL FAN

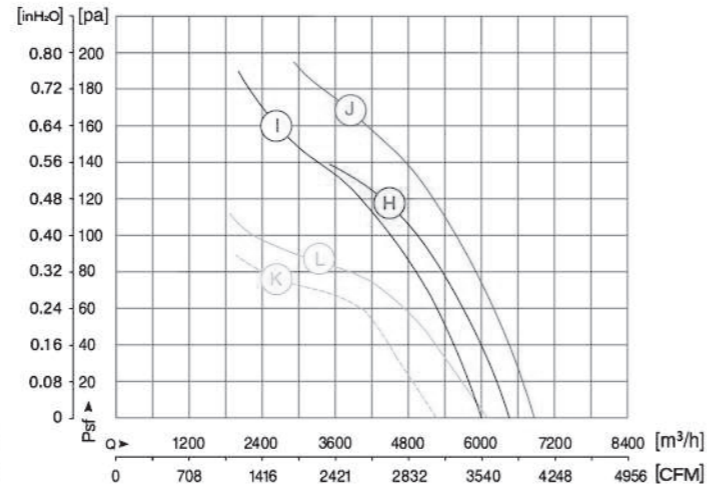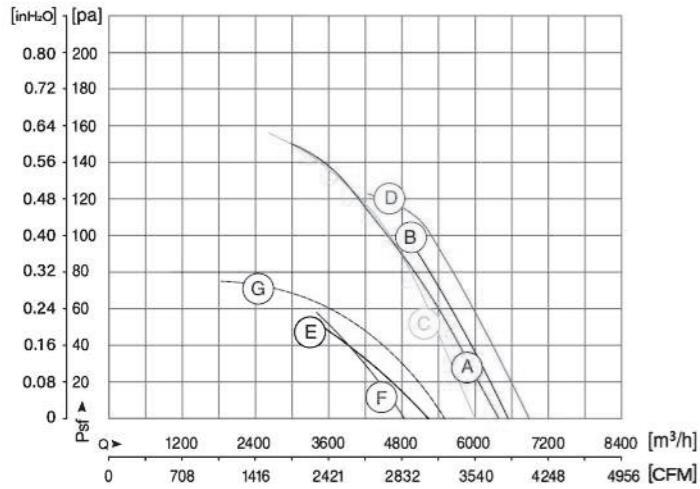




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF102L30P4-□-500	3~380	50	—	(A)	414	1312	0.79	102	-40~+70	ERP2026*	39.8	
YDWF102L35P4-□-500	1~220	50	10	(B)	424	1323	1.92	98	-40~+80	ERP2026*	70	
YDWF102L35P4-□-500	1~220	50	10	(C)	380	1347	1.73	119	-40~+85	ERP2026*	69	
				(D)	544	1453	2.47	112	-40~+80	ERP2026	72	
YDWF102L35P6-□-500	1~220	50	8	(E)	217	849	0.99	54	-40~+80	ERP2026	66	
YDWF102L35P6-□-500	1~220	50	8	(F)	183	894	0.84	58	-40~+85	ERP2026*	65	
				(G)	258	936	1.20	61	-40~+85	ERP2026	67	
YSWF102L35P4-□-500	3~380	50	—	(H)	449	1332	0.83	117	-40~+80	ERP2026*	70	
YSWF102L35P4-□-500	3~380	50	—	(I)	410	1353	0.87	122	-40~+85	ERP2026*	70	
				(J)	567	1516	1.01	125	-40~+80	ERP2026*	73	
YSWF102L35P6-□-500	3~380	50	—	(K)	218	908	0.54	59	-40~+80	ERP2026*	66	
				(L)	318	1007	0.60	76	-40~+85	ERP2026*	68	

1. Specifications might change without notice;

2. Special design on request

Ø 500

AC AXIAL FAN

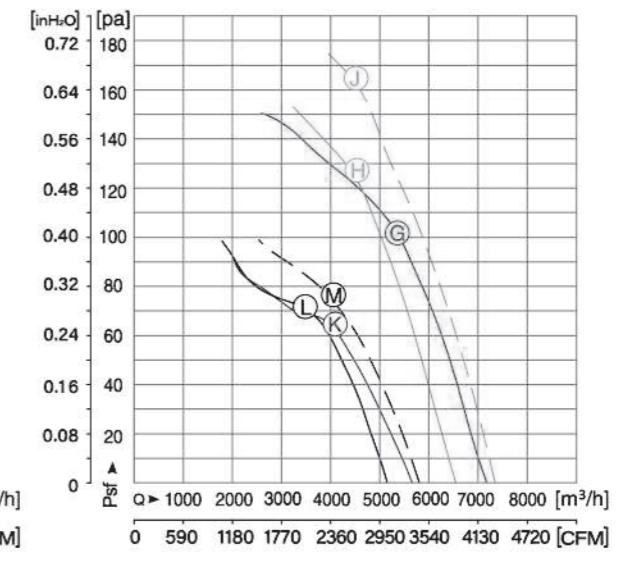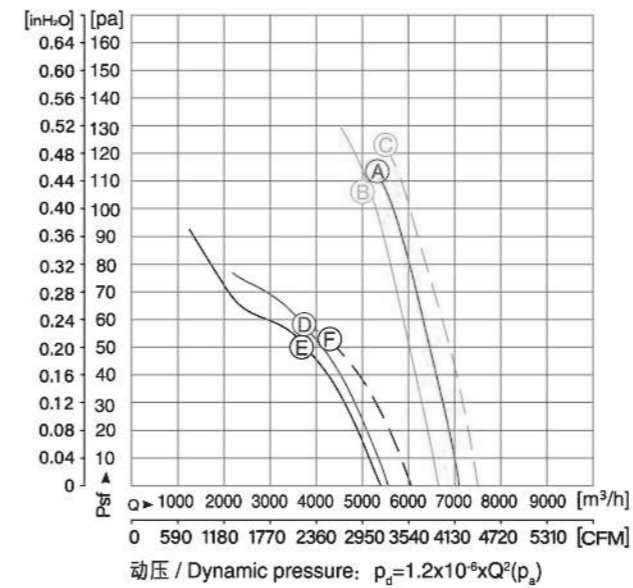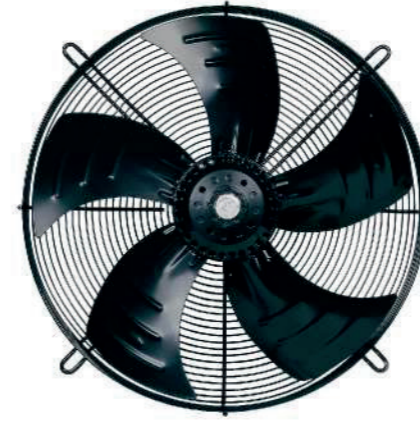

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF102L40P4-□-500	1~220	50	12	(A)	513	1345	2.33	114	-40~+65	ERP2026*	71	
YDWF102L40P4-□-500	1~220	50	12	(B)	468	1380	2.22	109	-40~+85	ERP2026*	71	
				(C)	731	1488	3.36	122	-40~+60	ERP2026	73	
YDWF102L40P6-□-500	1~220	50	10	(D)	246	880	1.12	57	-40~+70	ERP2026	66	
YDWF102L40P6-□-500	1~220	50	10	(E)	240	898	1.09	50	-40~+70	ERP2026	66	
				(F)	330	958	1.51	54	-40~+75	ERP2026	68	
YSWF102L40P4-□-500	3~380	50	—	(G)	504	1329	0.90	102	-40~+65	ERP2026*	71	
YSWF102L40P4-□-500	3~380	50	—	(H)	451	1347	0.83	127	-40~+80	ERP2026*	71	
				(J)	688	1484	1.16	164	-40~+60	ERP2026*	73	
YSWF102L40P6-□-500	3~380	50	—	(K)	248	918	0.60	66	-40~+70	ERP2026*	66	
				(L)	214	934	0.58	71	-40~+80	ERP2026*	66	
YSWF102L40P6-□-500	3~380	60	—	(M)	288	1072	0.58	76	-40~+80	ERP2026*	68	

1. Specifications might change without notice;

2. Special design on request

Ø 500

AC AXIAL FAN

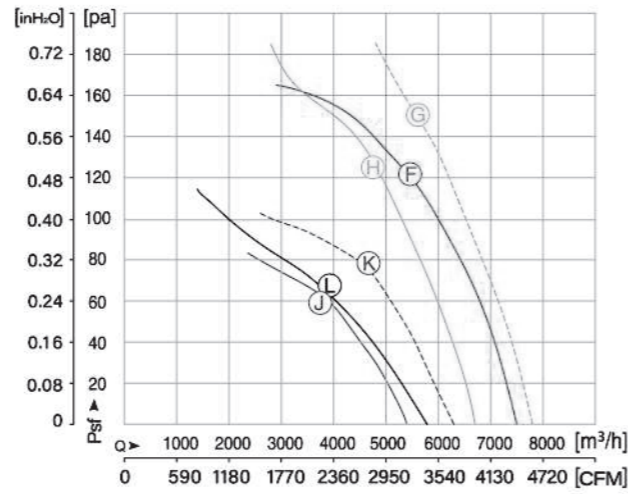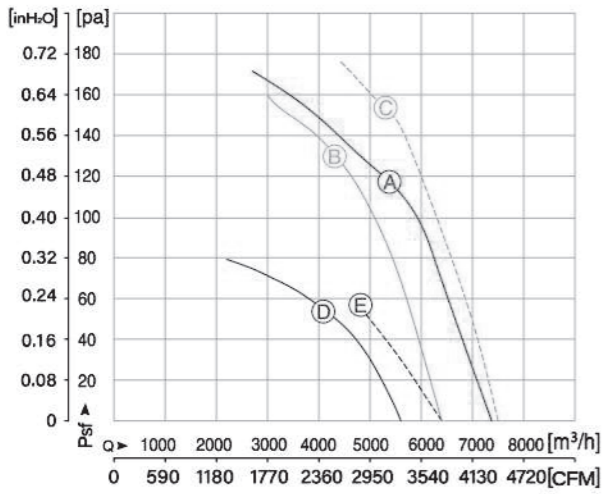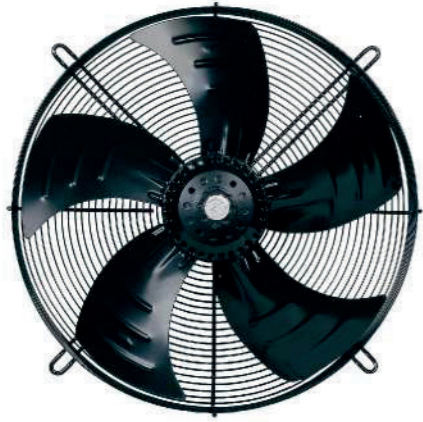

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF102L45P4-□-500	1~220	50	16	(A)	546	1381	2.50	119	-40~+70	ERP2026*	72	
YDWF102L45P4-□-500	1~220	50	16	(B)	441	1404	2.01	134	-40~+75	ERP2026*	71	
		60		(C)	664	1590	3.04	152	-40~+65	ERP2026*	73	
YDWF102L45P6-□-500	1~220	50	10	(D)	246	911	1.11	56	-40~+75	ERP2026*	66	
		60		(E)	350	998	1.60	58	-40~+60	ERP2026	69	
YSWF102L45P4-□-500	3~380	50	—	(F)	548	1381	1.10	121	-40~+75	ERP2026*	72	
YSWF102L45P4-□-500	3~380	50	—	(H)	471	1404	1.02	126	-40~+80	ERP2026*	71	
		60		(G)	705	1602	1.23	152	-40~+80	ERP2026*	74	
YSWF102L45P6-□-500	3~380	50	—	(L)	257	929	0.69	64	-40~+75	ERP2026*	68	
YSWF102L45P6-□-500	3~380	50	—	(J)	224	939	0.66	62	-40~+80	ERP2026*	66	
		60		(K)	317	1078	0.67	80	-40~+80	ERP2026*	69	

1. Specifications might change without notice;

2. Special design on request

Ø 500

AC AXIAL FAN

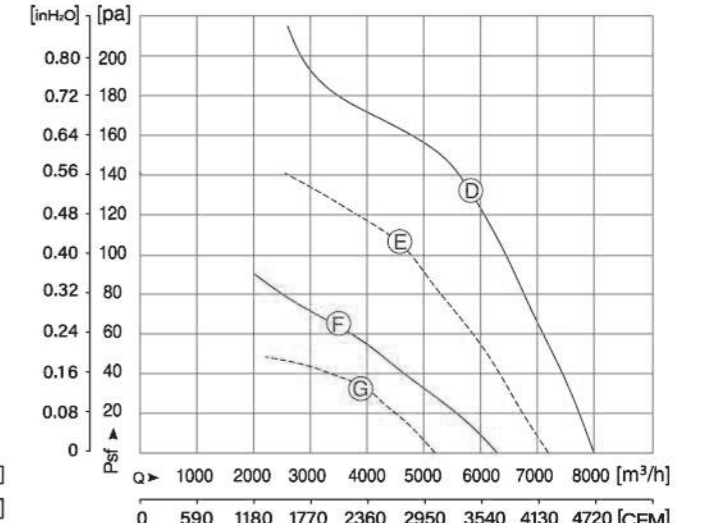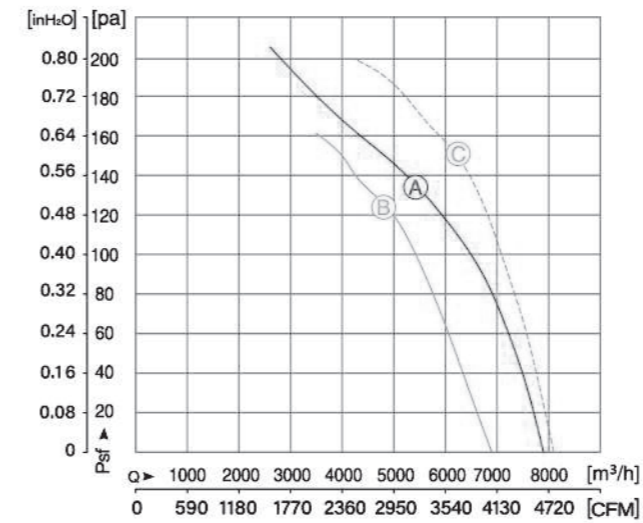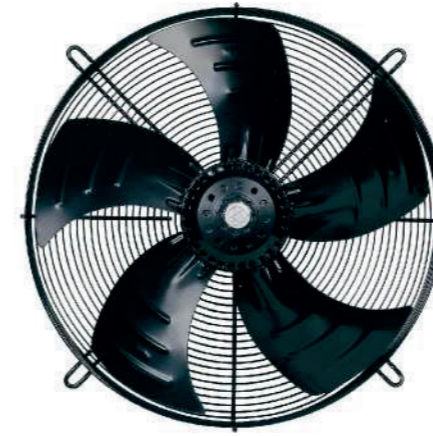

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF102L50P4-□-500	1~220	50	16	(A)	643	1372	3.00	131	-40~+70	ERP2026*	73	
YDWF102L50P4-□-500	1~220	50	16	(B)	495	1411	2.36	125	-40~+85	ERP2026*	71	
		60		(C)	744	1612	3.38	152	-40~+75	ERP2026*	73	
YSWF102L50P4-□-500	3~380△	50	—	(D)	645	1393	1.37	132	-40~+70	ERP2026*	73	
				(E)	511	1192	0.84	107	-40~+60	ERP2026	68	
YSWF102L50P6-□-500	3~380△	50	—	(F)	313	901	0.66	68	-40~+90	ERP2026	65	
				(G)	217	733	0.37	34	-40~+80	ERP2026	63	

1. Specifications might change without notice;

2. Special design on request



Ø 500

AC AXIAL FAN

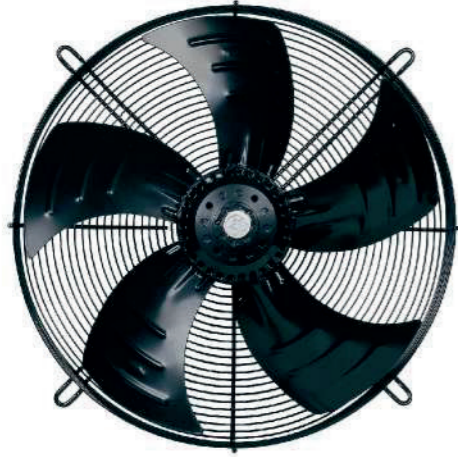

42

AC INDUSTRIAL FAN

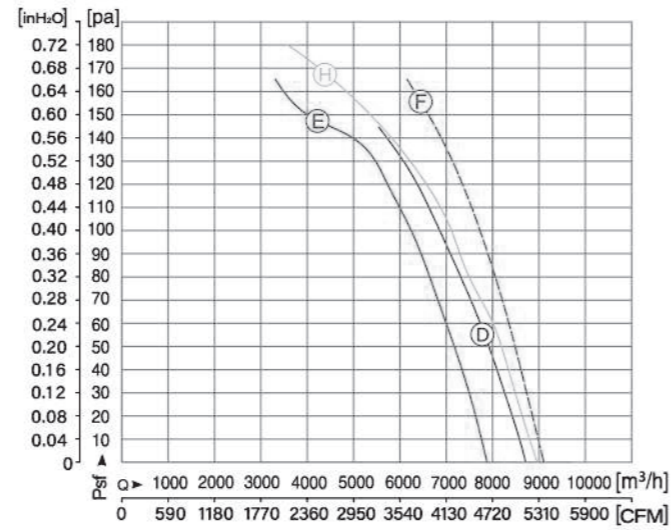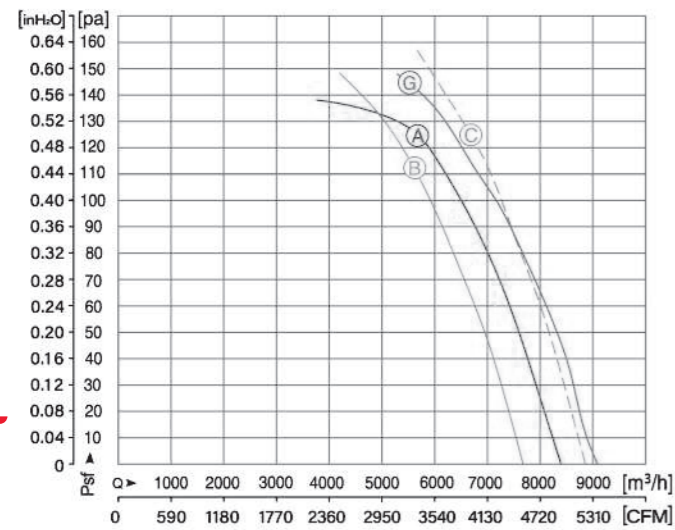

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L60P4-□-500	1~220	50	20	Ⓐ	710	1364	3.23	131	-40~+70	ERP2026	73	
YDWF102L60P4-□-500	1~220	50	20	Ⓑ	591	1402	2.69	133	-40~+80	ERP2026*	72	
YDWF102L60P4-□-500	1~220	60	20	Ⓒ	897	1566	4.10	135	-40~+65	ERP2026*	75	
YSWF102L60P4-□-500	3~380	50	—	Ⓓ	733	1369	1.57	127	-40~+70	ERP2026*	73	
YSWF102L60P4-□-500	3~380	50	—	Ⓔ	616	1401	1.38	141	-40~+80	ERP2026*	72	
YSWF102L60P4-□-500	3~380	60	—	Ⓕ	948	1594	1.62	165	-40~+65	ERP2026	75	
YDWF102L70P4-□-500	1~220	50	—	Ⓖ	823	1376	3.46	133	-40~+70	ERP2026	76	
YSWF102L70P4-□-500	3~380	50	—	Ⓗ	813	1398	1.71	121	-40~+70	ERP2026*	73	

1. Specifications might change without notice;

2. Special design on request

Ø 500



AC AXIAL FAN



43

AC INDUSTRIAL FAN

叶轮材质: 塑料  
Impeller Material: Plastic

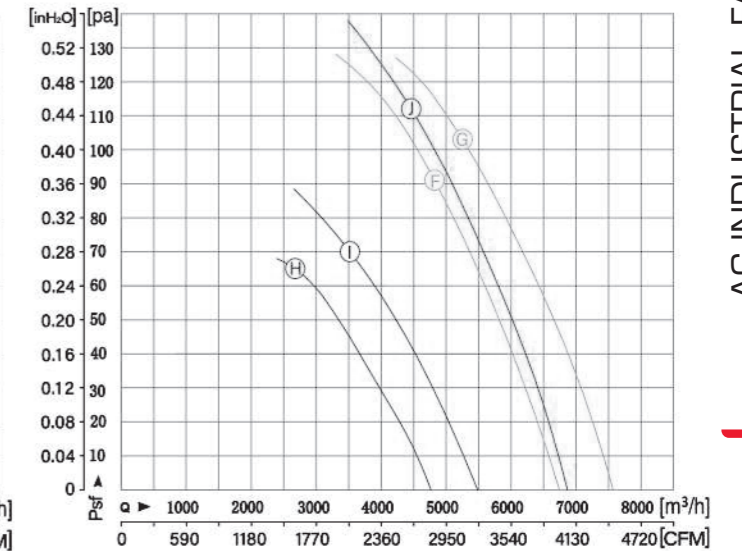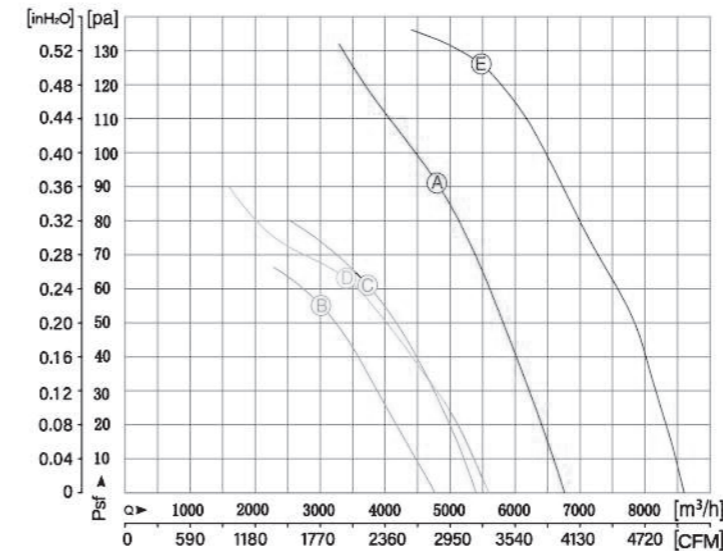

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L35P4-□-500PA	1~220	50	10	Ⓐ	423	1337	1.85	91	-40~+80	ERP2026*	66	2代
YDWF102L35P6-□-500PA	1~220	50	8	Ⓑ	180	918	0.83	55	-40~+80	ERP2026*	61	2代
YDWF102L35P6-□-500PA	1~220	60	8	Ⓒ	237	1049	1.14	61	-40~+80	ERP2026*	62	2代
YDWF102L45P6-□-500PA	1~220	50	10	Ⓓ	270	869	1.23	63	-40~+80	ERP2026	66	1代
YDWF102L70P4-□-500PA	1~220	50	20	Ⓔ	838	1355	3.79	126	-40~+70	ERP2026	76	1代
YSWF102L35P4-□-500PA	3~380	50	—	Ⓕ	429	1341	0.82	91	-40~+80	ERP2026*	66	2代
YSWF102L35P4-□-500PA	3~380	60	—	Ⓖ	632	1435	1.06	103	-40~+60	ERP2026	69	2代
YSWF102L35P6-□-500PA	3~380	50	—	Ⓗ	184	940	0.52	65	-40~+80	ERP2026*	61	2代
YSWF102L35P6-□-500PA	3~380	60	—	Ⓗ	239	1064	0.51	70	-40~+80	ERP2026*	62	2代

1. Specifications might change without notice;

2. Special design on request

Ø 500

AC AXIAL FAN

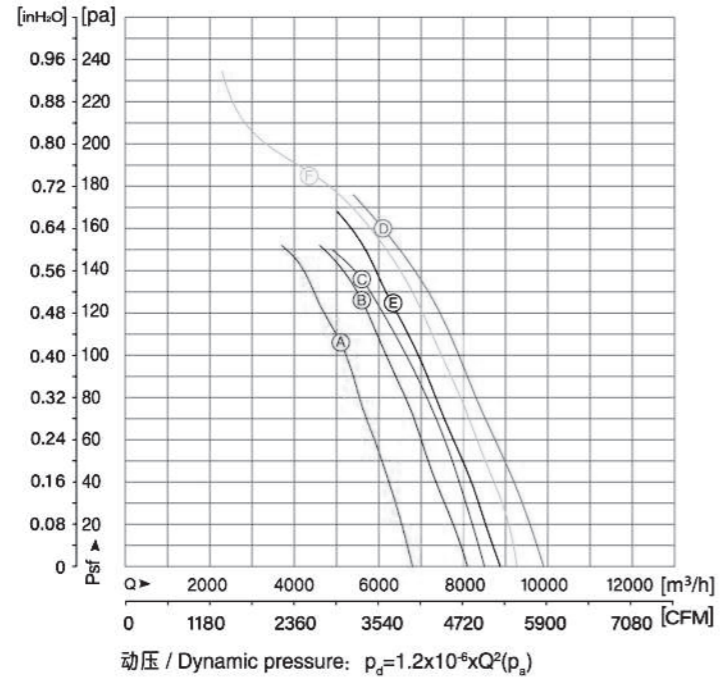


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF102L35P4-590G-500	3~380	50	—	(A)	406	1366	0.81	106	-40~+80	ERP2026*	70	
YSWF102L45P4-590G-500	3~380	50	—	(B)	541	1393	1.11	127	-40~+75	ERP2026*	72	
YSWF102L50P4-590G-500	3~380	50	—	(C)	601	1380	1.24	136	-40~+75	ERP2026*	73	
YSWF102L60P4-590G-500	3~380	50	—	(D)	773	1368	1.48	176	-40~+75	ERP2026*	70	
YSWF102L60P4-590G-500-7	3~380	50	—	(E)	790	1356	1.5	149	-40~+70	ERP2026*	66	带导叶
YSWF102L70P4-590G-500	3~380	50	—	(F)	828	1374	1.6	131	-40~+70	ERP2026*	66	带导叶

1. Specifications might change without notice;

2. Special design on request

Ø 500

AC AXIAL FAN

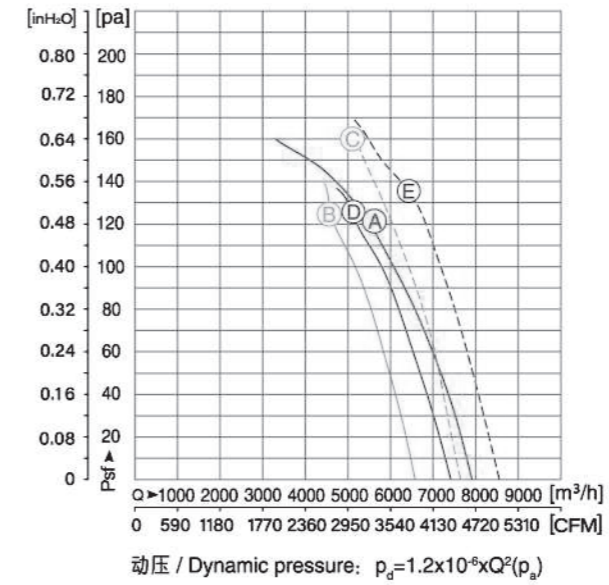

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L50P4-□-500-7	1~220	50	16	(A)	661	1356	3.00	124	-40~+70	ERP2026	73	
YDWF102L50P4-□-500-7	1~220	50	16	(B)	508	1407	2.31	126	-40~+75	ERP2026*	71	
		60		(C)	793	1584	3.61	159	-40~+75	ERP2026	74	
YDWF102L60P4-□-500-7	1~220	50	20	(D)	583	1399	2.65	123	-40~+75	ERP2026*	72	
		60		(E)	883	1578	4.05	136	-40~+75	ERP2026	75	

1. Specifications might change without notice;

2. Special design on request


Ø 500

AC AXIAL FAN





Ø 500

AC AXIAL FAN

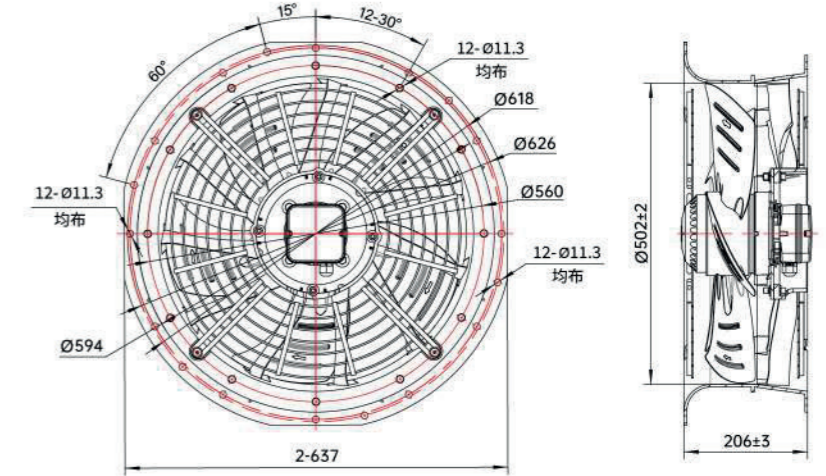

46

AC INDUSTRIAL FAN

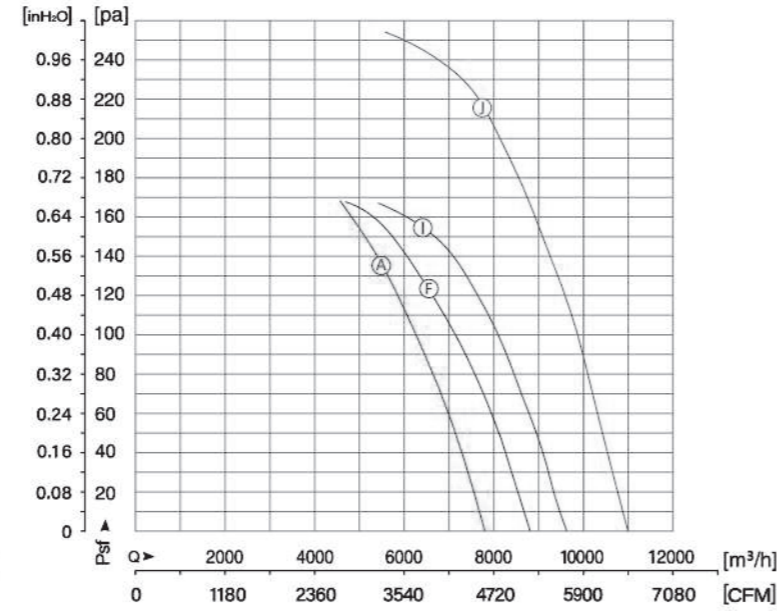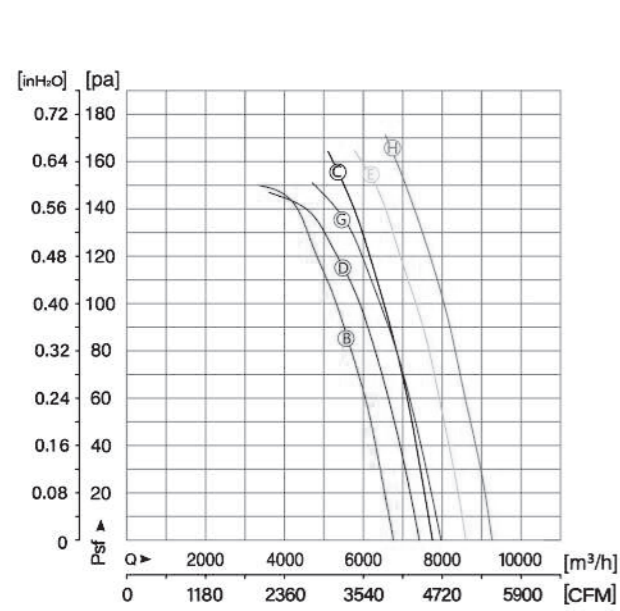

动压 / Dynamic pressure:  $p_d = 1.2 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF102L50P4-□-500-7	3~380	50	—	(A)	661	1401	1.44	145	-40~+70	ERP2026	72	
YSWF102L50P4-□-500-7	3~380	50	—	(B)	507	1407	1.00	128	-40~+80	ERP2026*	71	
		60		(C)	741	1604	1.26	141	-40~+75	ERP2026*	74	
YSWF102L60P4-□-500-7	3~380	50	—	(D)	582	1407	1.23	127	-40~+80	ERP2026*	72	
		60		(E)	883	1608	1.52	149	-40~+75	ERP2026	75	
YSWF102L70P4-□-500-7	3~380	50	—	(F)	795	1396	1.67	138	-40~+70	ERP2026	74	
YSWF102L70P4-□-500-7	3~380	50	—	(G)	664	1418	1.50	137	-40~+80	ERP2026*	74	
		60		(H)	1027	1627	1.82	171	-40~+75	ERP2026	77	
YSWF127L50P4-□-500-7	3~400	50	—	(I)	987	1417	1.91	147	-40~+70	ERP2026	75	
		60		(J)	1611	1685	2.90	225	-40~+70	ERP2026	78	

1. Specifications might change without notice;

2. Special design on request

47

AC INDUSTRIAL FAN

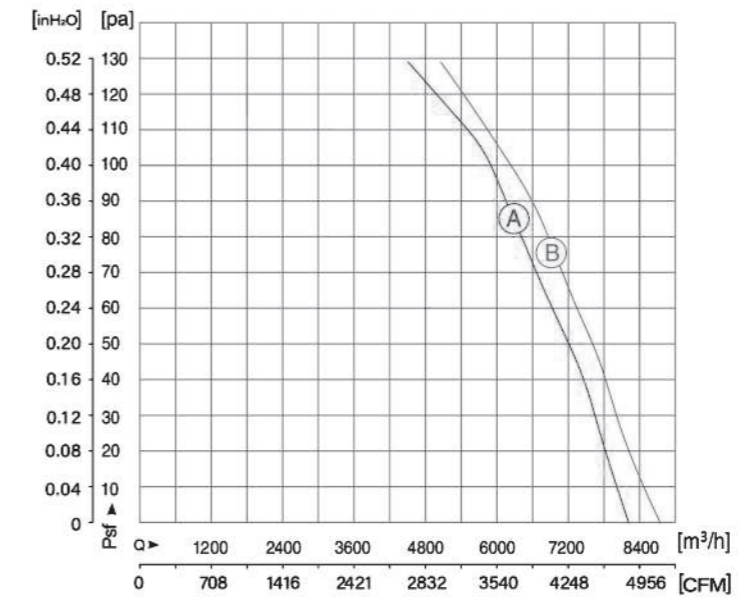

动压 / Dynamic pressure:  $p_d = 0.82 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF102L70P4-□-500	3~380	50	—	(A)	690	1408	1.43	105	-40~+70	ERP2026	68	
YSWF102L70P4-□-500-7	3~380	50	—	(B)	769	1387	1.55	129	-40~+70	ERP2026	67	

注：性能曲线在安装马尔导风罩时测得。Note: The performance curve is tested with MaEr wall plate.


1. Specifications might change without notice;

2. Special design on request

Ø 500

INSTALLATION ACCESSORIES


□-570N

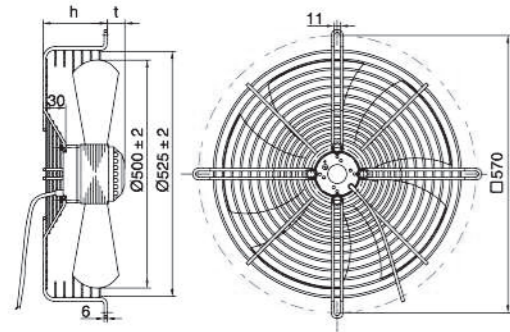

常规凹网罩 Concave grid 570N

型号 MODEL	h	t
YD(S)WF102L30P4-570N-500	90	50
YD(S)WF102L35P4-570N-500	90	55
YD(S)WF102L35P6-570N-500	90	55
YD(S)WF102L40P4-570N-500	90	60
YD(S)WF102L40P6-570N-500	90	60
YD(S)WF102L45P4-570N-500	90	65
YD(S)WF102L45P6-570N-500	90	65
YSWF102L45P8-570N-500	90	65
YD(S)WF102L50P4-570N-500	90	70
YD(S)WF102L50P4-570N-500-7	90	70
YSWF102L50P6-570N-500	90	70
YD(S)WF102L60P4-570N-500	90	80

□-615H

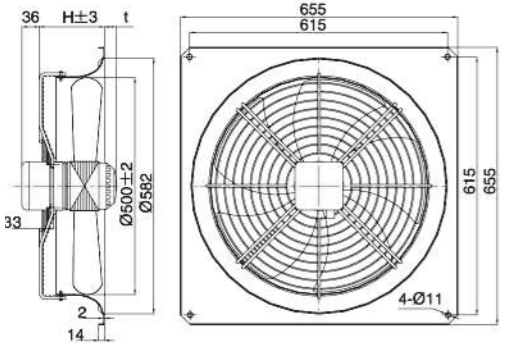


带风圈(大R) Wall plate 615H

型号 MODEL	h	t
YD(S)WF102L30P4-615H-500	145	—
YD(S)WF102L35P4-615H-500	145	—
YD(S)WF102L35P6-615H-500	145	—
YD(S)WF102L40P4-615H-500	145	5
YD(S)WF102L40P6-615H-500	145	5
YD(S)WF102L45P4-615H-500	145	10
YD(S)WF102L45P6-615H-500	145	10
YSWF102L45P8-615H-500	145	10
YD(S)WF102L50P4-615H-500	145	15
YD(S)WF102L50P4-615H-500-7	145	15
YD(S)WF102L60P4-615H-500	145	25
YD(S)WF102L70P4-615H-500	145	35

带翻边风圈 Flanging wall plate 615H

型号 MODEL	h	t
YD(S)WF102L30P4-615H-500	155	—
YD(S)WF102L35P4-615H-500	155	—
YD(S)WF102L35P6-615H-500	155	—
YD(S)WF102L40P4-615H-500	155	—
YD(S)WF102L40P6-615H-500	155	—
YD(S)WF102L45P4-615H-500	155	5
YD(S)WF102L45P6-615H-500	155	5
YSWF102L45P8-615H-500	155	5
YD(S)WF102L50P4-615H-500	155	10
YD(S)WF102L50P4-615H-500-7	155	10
YD(S)WF102L60P4-615H-500	155	20
YD(S)WF102L70P4-615H-500	155	30


□-550G

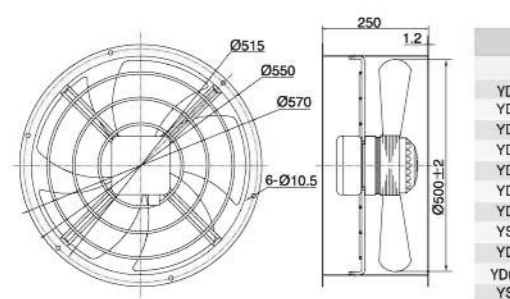

带风圈 Air duct 550G

型号 MODEL	h	t
YD(S)WF102L30P4-550G-500	—	—
YD(S)WF102L35P4-550G-500	—	—
YD(S)WF102L35P6-550G-500	—	—
YD(S)WF102L40P4-550G-500	—	—
YD(S)WF102L40P6-550G-500	—	—
YD(S)WF102L45P4-550G-500	—	—
YD(S)WF102L45P6-550G-500	—	—
YSWF102L45P8-550G-500	—	—
YD(S)WF102L50P4-550G-500	—	—
YD(S)WF102L50P4-550H-500-7	—	—
YSWF102L50P6-550G-500	—	—
YD(S)WF102L60P4-550G-500	—	—

□-590G

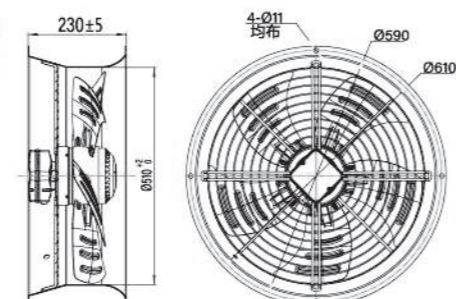

带高能效风圈 Air duct 590G


型号 MODEL	h	t
YSWF102L30P4-590G-500	—	—
YSWF102L35P4-590G-500	—	—
YSWF102L45P4-590G-500	—	—
YSWF102L50P4-590G-500	—	—
YSWF102L50P4-590G-500-7	—	—
YSWF102L60P4-590G-500	—	—

□-其他安装附件 Others


平网罩 Flat screen grid 570P			平板网罩 Flat net grid 570B			凹板网罩 Concave flat grid 570NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L30P4-570P-500	90	26	YD(S)WF102L30P4-570B-500	—	116	YD(S)WF102L30P4-570NB-500	—	141
YD(S)WF102L35P4-570P-500	90	31	YD(S)WF102L35P4-570B-500	—	121	YD(S)WF102L35P4-570NB-500	—	145
YD(S)WF102L35P6-570P-500	90	31	YD(S)WF102L35P6-570B-500	—	121	YD(S)WF102L35P6-570NB-500	—	145
YD(S)WF102L40P4-570P-500	90	36	YD(S)WF102L40P4-570B-500	—	126	YD(S)WF102L40P4-570NB-500	—	150
YD(S)WF102L40P6-570P-500	90	36	YD(S)WF102L40P6-570B-500	—	126	YD(S)WF102L40P6-570NB-500	—	150
YD(S)WF102L45P4-570P-500	90	41	YD(S)WF102L45P4-570B-500	—	131	YD(S)WF102L45P4-570NB-500	—	155
YD(S)WF102L45P6-570P-500	90	41	YD(S)WF102L45P6-570B-500	—	131	YD(S)WF102L45P6-570NB-500	—	155
YSWF102L45P8-570P-500	90	41	YSWF102L45P8-570B-500	—	131	YSWF102L45P8-570NB-500	—	155
YD(S)WF102L50P4-570P-500	90	46	YD(S)WF102L50P4-570B-500	—	136	YD(S)WF102L50P4-570NB-500	—	160
YD(S)WF102L50P4-570P-500-7	90	46	YD(S)WF102L50P4-570B-500-7	—	136	YD(S)WF102L50P4-570NB-500-7	—	160
YSWF102L50P6-570P-500	90	46	YSWF102L50P6-570B-500	—	136	YSWF102L50P6-570NB-500	—	160
YD(S)WF102L60P4-570P-500	90	56	YD(S)WF102L60P4-570B-500	—	146	YD(S)WF102L60P4-570NB-500	—	170
YD(S)WF127L50P4-570P-500-7	90	81						

Ø 550

AC AXIAL FAN

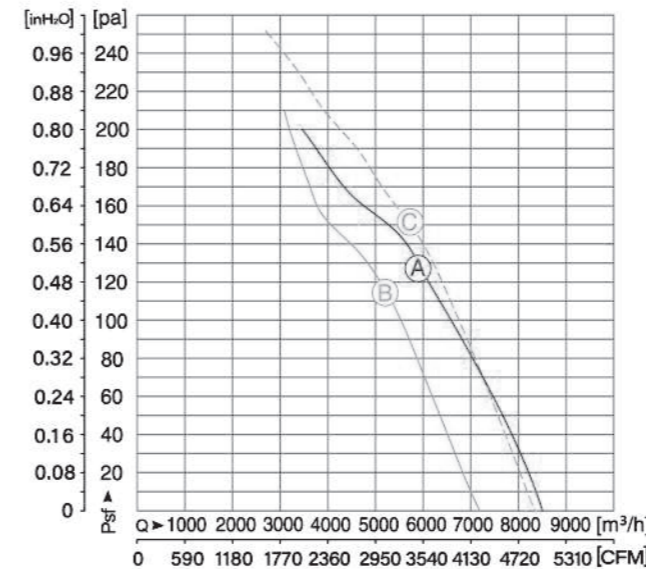


动压 / Dynamic pressure:  $p_d = 0.82 \times 10^{-6} \times Q^2 (p_a)$

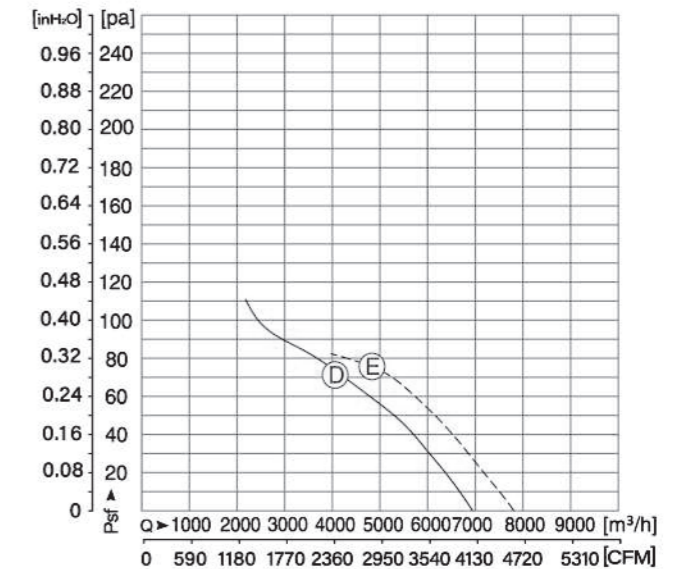


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YDWF102L50P4-□-550	1~220	50	16	Ⓐ	639	1361	2.90	126	-40~+70	ERP2026*	74	
YDWF102L50P4-□-550	1~220	50	16	Ⓑ	516	1408	2.44	116	-40~+85	ERP2026*	73	
				Ⓒ	808	1587	3.68	150	-40~+70	ERP2026	76	
YDWF102L50P6-□-550	1~220	50	12	Ⓓ	348	897	1.59	72	-40~+70	ERP2026	69	
				Ⓔ	460	985	2.24	75	-40~+60	ERP2026	70	

Ø 550

AC AXIAL FAN

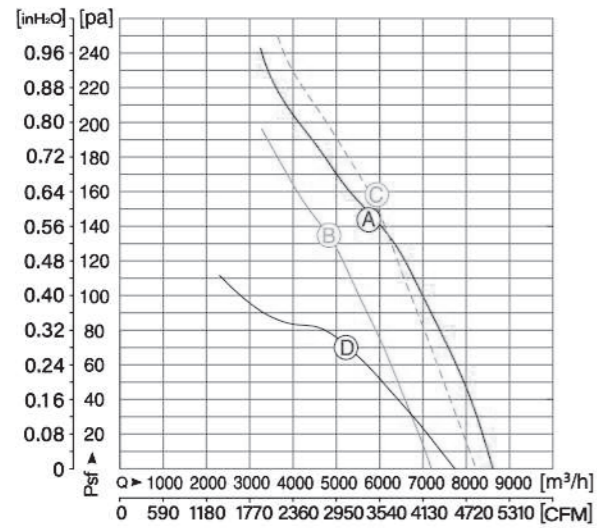

动压 / Dynamic pressure:  $p_d = 0.82 \times 10^{-6} \times Q^2 (p_a)$

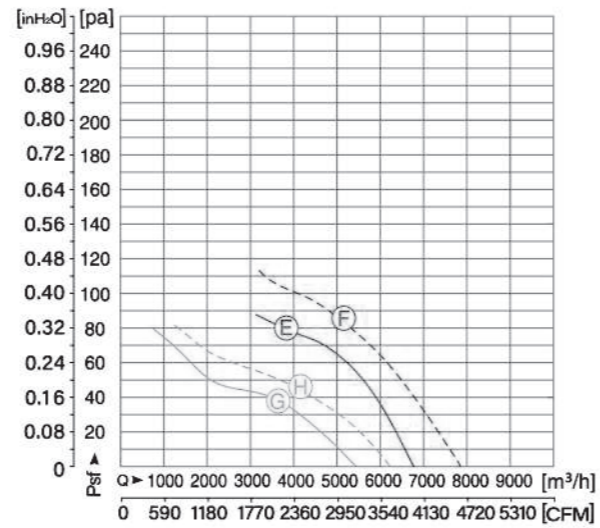


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF102L50P4-□-550	3~380	50	—	Ⓐ	670	1377	1.27	145	-40~+70	ERP2026*	74	
YSWF102L50P4-□-550	3~380	50	—	Ⓑ	531	1406	1.24	135	-40~+85	ERP2026*	73	
YSWF102L50P4-□-550	3~380	60	—	Ⓒ	763	1614	1.38	158	-40~+70	ERP2026*	75	
YSWF102L50P6-□-550	3~380	50	—	Ⓓ	366	895	0.76	80	-40~+70	ERP2026*	69	
YSWF102L50P6-□-550	3~380	50	—	Ⓔ	295	921	0.69	71	-40~+80	ERP2026*	67	
YSWF102L50P6-□-550	3~380	60	—	Ⓕ	434	1037	0.80	88	-40~+70	ERP2026*	70	
YSWF102L50P8-□-550	3~380	50	—	Ⓖ	206	679	0.51	37	-40~+80	ERP2026	60	
YSWF102L50P8-□-550	3~380	60	—	Ⓖ	264	756	0.52	47	-40~+70	ERP2026	62	

1. Specifications might change without notice;

2. Special design on request

Ø 550

AC AXIAL FAN

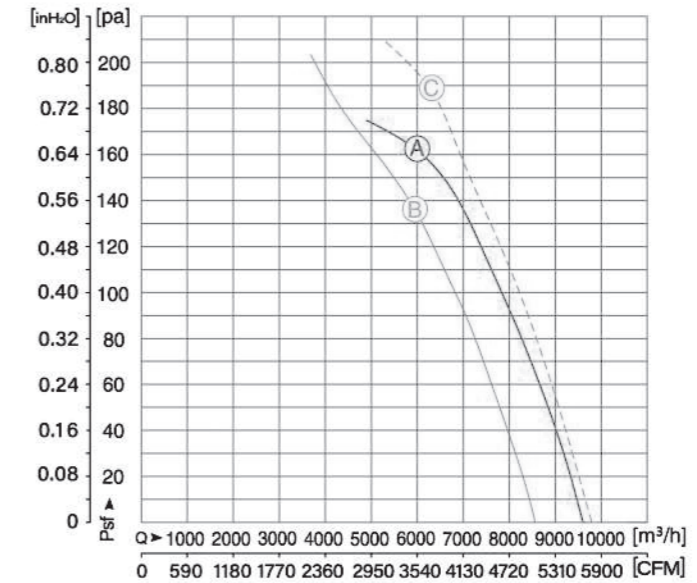

动压 / Dynamic pressure:  $p_d = 0.82 \times 10^{-6} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF102L60P4-□-550	3~380	50	—	Ⓐ	808	1363	1.48	162	-40~+70	ERP2026*	75	
YSWF102L60P4-□-550	3~380	50	—	Ⓑ	657	1395	1.29	138	-40~+85	ERP2026*	73	
YSWF102L60P4-□-550	3~380	60	—	Ⓒ	1036	1570	1.74	191	-40~+65	ERP2026*	76	

1. Specifications might change without notice;

2. Special design on request

Ø 550

AC AXIAL FAN

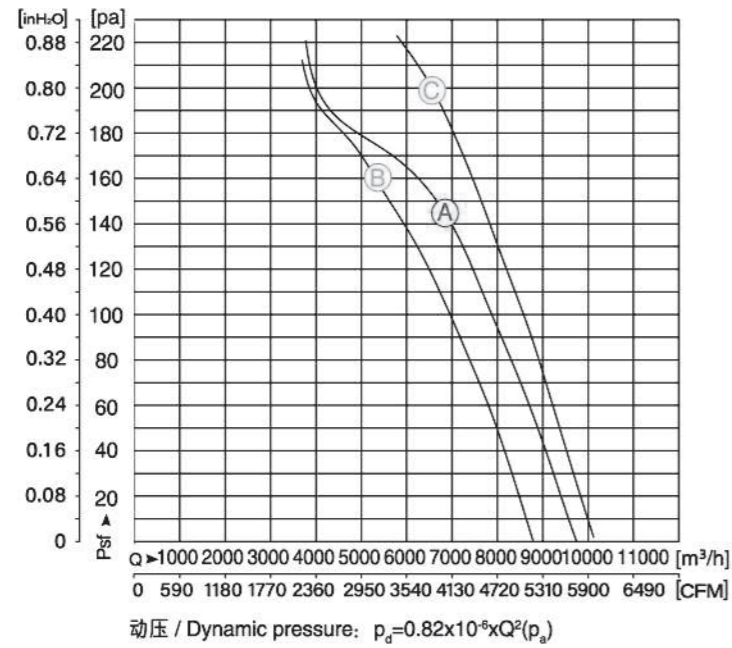


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF102L70P4-□-550	3~380	50	—	(A)	802	1402	1.62	144	-40~+70	ERP2026*	76	
YSWF102L70P4-□-550	3~380	50	—	(B)	723	1410	1.55	162	-40~+80	ERP2026*	74	
		60		(C)	1077	1621	1.88	200	-40~+65	ERP2026*	77	

Ø 550


INSTALLATION ACCESSORIES

□-625N/635N

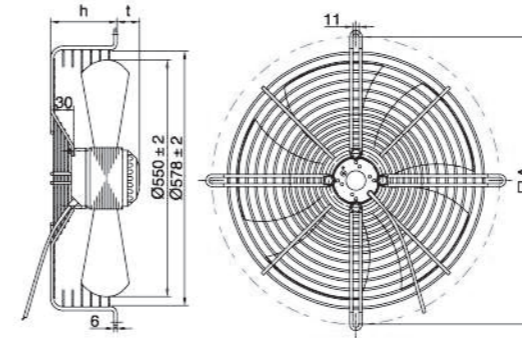


常规凹网罩 Concave grid 625N/635N			
型号 MODEL	h	t	A
YD(S)WF102L50P4-635N-550	100	60	635
YD(S)WF102L50P6-635N-550	100	60	635
YD(S)WF102L50P8-635N-550	100	60	635
YSWF102L60P4-635N-550	100	70	635
YSWF102L70P4-635N-550	100	80	635

□-675H

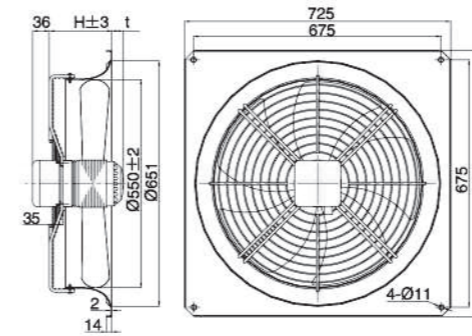

带导风圈(大)Wall plate 675H			带翻边圈 Flanging wall plate 675H		
型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L50P4-675H-550	148	24	YD(S)WF102L50P4-675H-550	160	—
YD(S)WF102L50P6-675H-550	148	24	YD(S)WF102L50P6-675H-550	160	—
YD(S)WF102L50P8-675H-550	148	24	YD(S)WF102L50P8-675H-550	160	—
YSWF102L60P4-675H-550	148	34	YSWF102L60P4-675H-550	160	18
YSWF102L70P4-675H-550	148	44	YSWF102L70P4-675H-550	160	28

□-600G

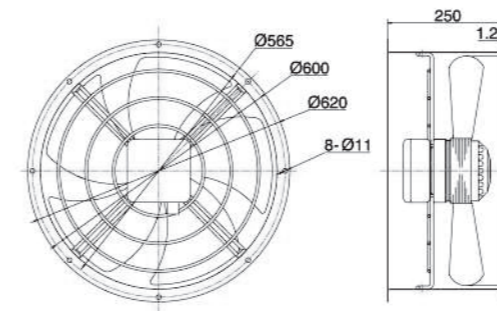




带风筒 Air duct 600G	
型号 MODEL	
YD(S)WF102L50P4-600G-550	
YD(S)WF102L50P6-600G-550	
YD(S)WF102L50P8-600G-550	
YSWF102L60P4-600G-550	
YSWF102L70P4-600G-550	

□-其他安装附件 Others

平网罩 Flat screen grid 625P/635P				平板网罩 Flat net grid 625B/635B				凹板网罩 Concave flat grid 625NB/635NB			
型号 MODEL	h	t	A	型号 MODEL	h	t	A	型号 MODEL	h	t	A
YD(S)WF102L50P4-635P-550	100	36	635	YD(S)WF102L50P4-635B-550	—	136	635	YD(S)WF102L50P4-635NB-550	—	160	635
YD(S)WF102L50P6-635P-550	100	36	635	YD(S)WF102L50P6-635B-550	—	136	635	YD(S)WF102L50P6-635NB-550	—	160	635
YD(S)WF102L50P8-635P-550	100	36	635	YD(S)WF102L50P8-635B-550	—	136	635	YD(S)WF102L50P8-635NB-550	—	160	635
YSWF102L60P4-635P-550	100	46	635	YSWF102L60P4-635B-550	—	146	635	YSWF102L60P4-635NB-550	—	170	635
YSWF102L70P4-635P-550	100	56	635	YSWF102L70P4-635B-550	—	156	635	YSWF102L70P4-635NB-550	—	180	635

Ø 600

AC AXIAL FAN

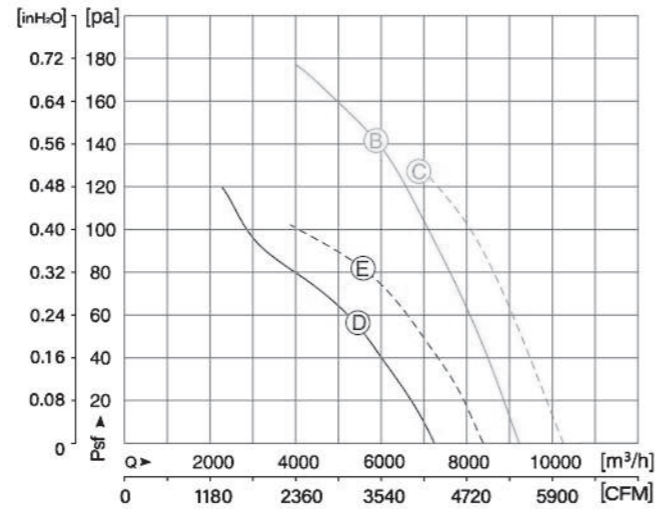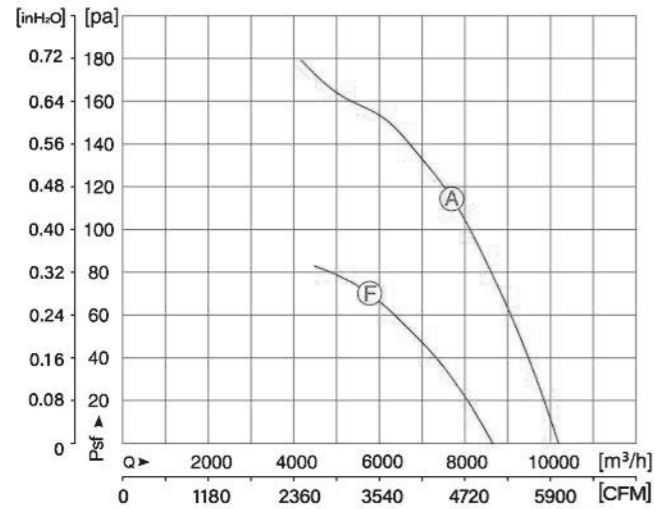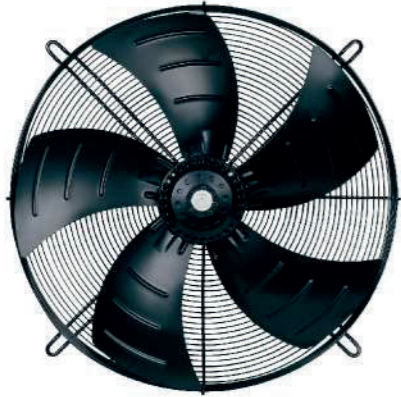




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YDWF102L60P4-□-600	1~220	50	20	(A)	783	1329	3.55	117	-40~+65	ERP2026*	75	
YDWF102L60P4-□-600	1~220	50	20	(B)	700	1354	3.19	141	-40~+75	ERP2026*	74	
				(C)	1028	1453	4.67	129	-40~+60	ERP2026	78	
YDWF102L60P6-□-600	1~220	50	12	(D)	313	929	1.44	56	-40~+80	ERP2026*	69	
				(E)	460	1043	2.10	81	-40~+70	ERP2026	72	
YDWF102L60P6-□-600	1~220	50	12	(F)	427	893	1.97	70	-40~+75	ERP2026	69	

1. Specifications might change without notice;

2. Special design on request

Ø 600

AC AXIAL FAN

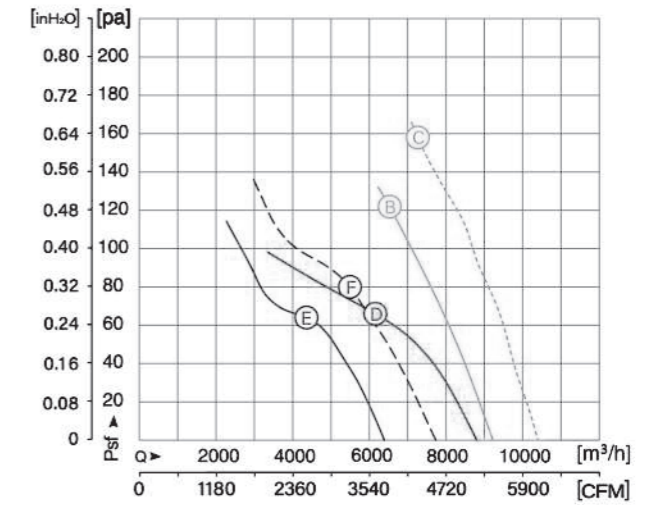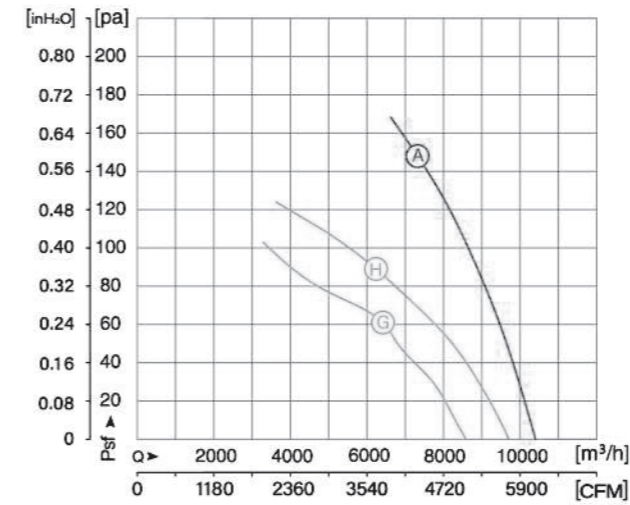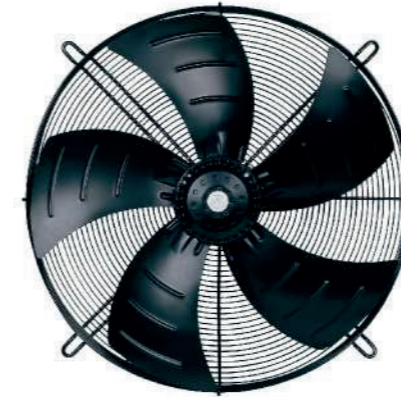




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF102L60P4-□-600	3~380	50	—	(A)	825	1365	1.56	145	-40~+70	ERP2026*	75	
YSWF102L60P4-□-600	3~380	50	—	(B)	726	1383	1.37	121	-40~+75	ERP2026*	74	
				(C)	935	1602	1.61	158	-40~+60	ERP2026*	75	
YSWF102L60P6-□-600	3~380	50	—	(D)	420	903	0.93	66	-40~+65	ERP2026	72	
YSWF102L60P6-□-600	3~380	50	—	(E)	259	948	0.79	64	-40~+90	ERP2026*	68	小角度 Small angle
				(F)	377	1092	0.80	80	-40~+90	ERP2026*	71	
YSWF102L60P6-□-600	3~380	50	—	(G)	393	910	0.93	61	-40~+80	ERP2026*	68	常规角度 Conventional angle
				(H)	574	1017	1.08	89	-40~+75	ERP2026	71	

1. Specifications might change without notice;

2. Special design on request

Ø 600

AC AXIAL FAN

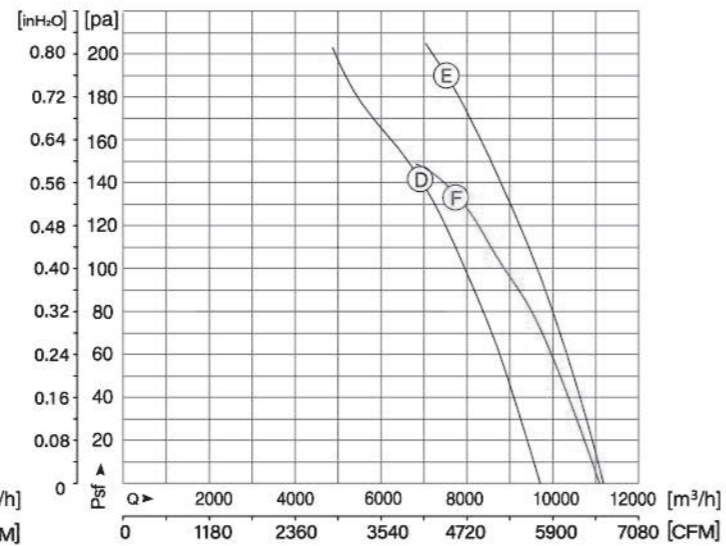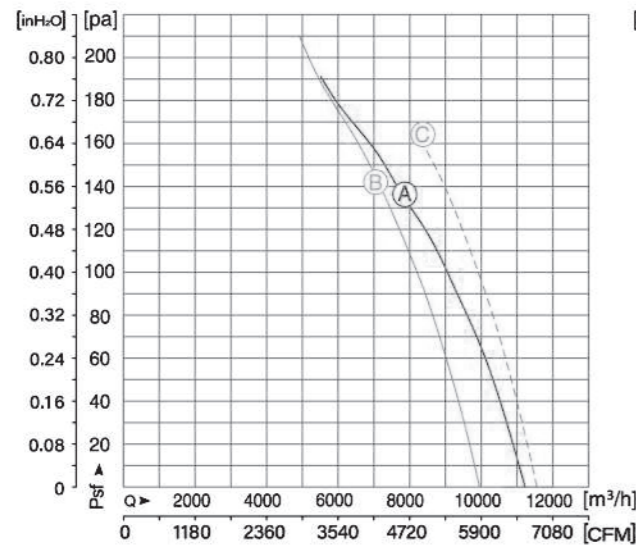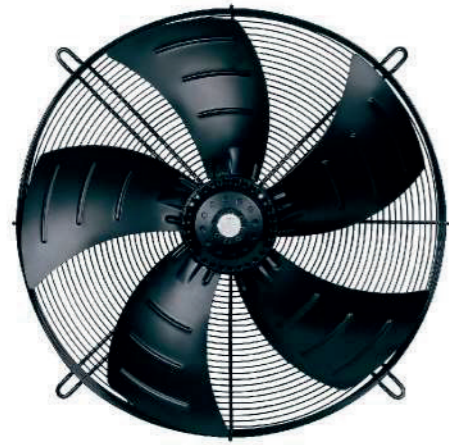


动压 / Dynamic pressure:  $p_d = 0.58 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF102L70P4-□-600	1~220	50	20	Ⓐ	934	1329	4.22	136	-40~+60	ERP2026*	76	
YDWF102L70P4-□-600	1~220	50	20	Ⓑ	821	1406	3.89	141	-40~+70	ERP2026*	75	
		60		Ⓒ	1279	1569	5.85	164	-40~+50	ERP2026	76	
YSWF102L70P4-□-600	3~380	50	—	Ⓓ	764	1404	1.57	141	-40~+75	ERP2026*	75	
		60		Ⓔ	1199	1591	2.05	190	-40~+60	ERP2026*	76	
YSWF102L70P4-□-600	3~380	50	—	Ⓕ	920	1370	1.72	144	-40~+65	ERP2026*	75	

Ø 600

AC AXIAL FAN

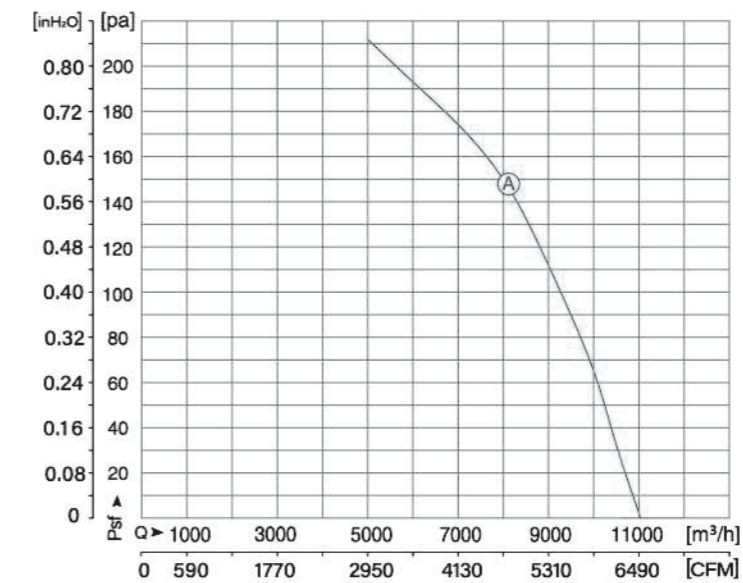


动压 / Dynamic pressure:  $p_d = 0.58 \times 10^{-6} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF102L70P4-□-600-7	3~380	50	—	Ⓐ	962	1397	1.82	147	-40~+70	ERP2026*	78	

# Ø 600


## INSTALLATION ACCESSORIES

□-675N

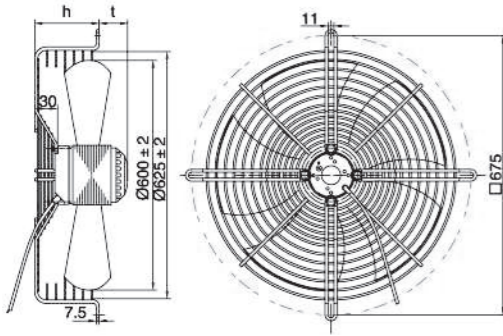


常规凹网罩 Concave grid 675N			
型号 MODEL	h	t	
YD(S)WF102L60P4-675N-600	100	70	
YD(S)WF102L60P6-675N-600	100	70	
YD(S)WF102L70P4-675N-600	100	80	

□-725H

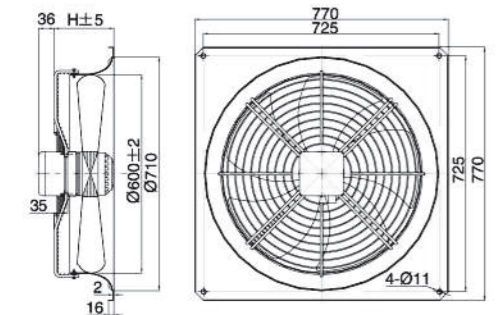

带导风圈(大R) Wall plate 725H			带翻边导风圈 Flanging wall plate 725H		
型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L60P4-725H-600	173	—	YD(S)WF102L60P4-725H-600	175	—
YD(S)WF102L60P6-725H-600	173	—	YD(S)WF102L60P6-725H-600	175	—
YD(S)WF102L70P4-725H-600	173	10	YD(S)WF102L70P4-725H-600	175	5

□-650G

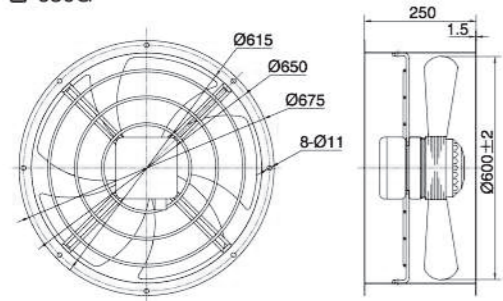



带风筒 Air duct 650G			
型号 MODEL	h	t	
YD(S)WF102L60P4-650G-600	—	—	
YD(S)WF102L60P6-650G-600	—	—	
YD(S)WF102L70P4-650G-600	—	—	

□-其他安装附件 Others

平网罩 Flat screen grid 675P			平板网罩 Flat net grid 675B			凹板网罩 Concave flat grid 675NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L60P4-675P-600	100	48	YD(S)WF102L60P4-675B-600	—	148	YD(S)WF102L60P4-675NB-600	—	170
YD(S)WF102L60P6-675P-600	100	48	YD(S)WF102L60P6-675B-600	—	148	YD(S)WF102L60P6-675NB-600	—	170
YD(S)WF102L70P4-675P-600	100	58	YD(S)WF102L70P4-675B-600	—	158	YD(S)WF102L70P4-675NB-600	—	180

# Ø 630


## AC AXIAL FAN

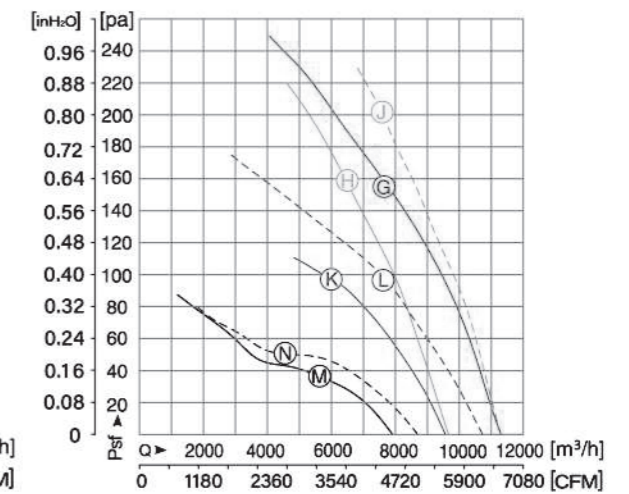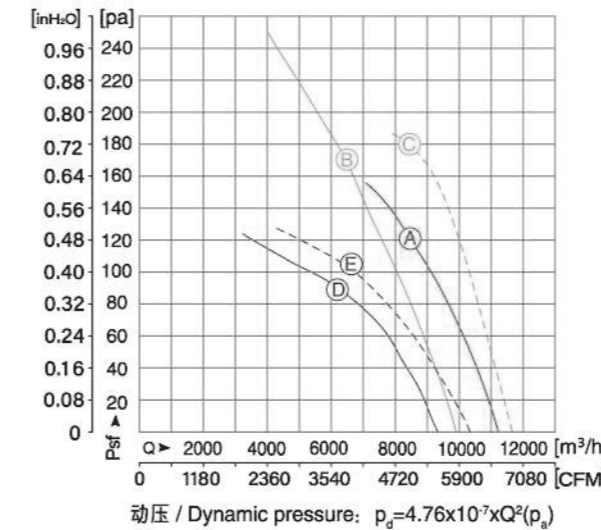

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF102L70P4-□-630	1~220	50	20	(A)	892	1349	4.04	120	-40~+70	ERP2026*	76	
YDWF102L70P4-□-630	1~220	50	20	(B)	805	1398	3.86	170	-40~+80	ERP2026*	75	
				(C)	1193	1576	5.45	180	-40~+60	ERP2026*	78	
YDWF102L70P6-□-630	1~220	60	16	(D)	479	919	2.22	91	-40~+80	ERP2026*	71	
				(E)	662	1038	3.01	104	-40~+80	ERP2026	74	
YSWF102L70P4-□-630	3~380	50	—	(G)	937	1378	1.75	155	-40~+70	ERP2026*	77	
YSWF102L70P4-□-630	3~380	50	—	(H)	735	1406	1.60	159	-40~+80	ERP2026*	75	
				(J)	1131	1600	1.97	201	-40~+60	ERP2026*	73	
YSWF102L70P6-□-630	3~380	60	—	(K)	485	925	1.23	97	-40~+85	ERP2026*	70	
				(L)	652	1063	1.30	96	-40~+85	ERP2026*	74	
YSWF102L70P8-□-630	3~380	50	—	(M)	317	661	0.69	36	-40~+70	ERP2026	64	
				(N)	427	706	0.77	47	-40~+65	ERP2026	65	

Ø 630

AC AXIAL FAN

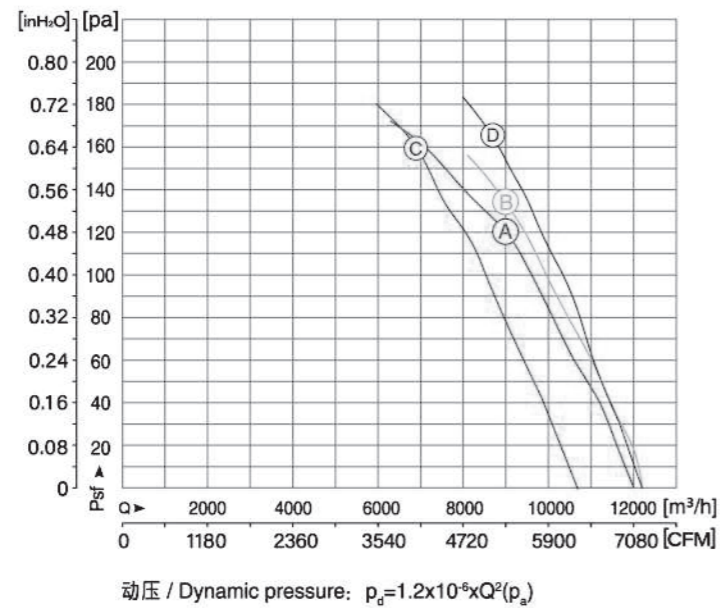

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB/(A)	
YDWF102L70P4-735G-630	1~220	50	20	(A)	863	1329	3.96	120	-40~+80	ERP2026*	75	
YSWF102L70P4-735G-630	3~380	50	—	(B)	854	1371	1.60	135	-40~+80	ERP2026*	75	
YSWF102L70P4-735G-630	3~380	50	—	(C)	814	1385	1.62	159	-40~+80	ERP2026*	72	
		60	—	(D)	1147	1571	1.97	165	-40~+60	ERP2026*	75	


1. Specifications might change without notice;

2. Special design on request

Ø 630


INSTALLATION ACCESSORIES

□-753N

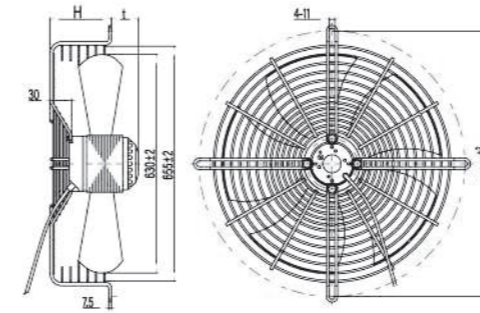


常规凹网罩 Concave grid 753N				低凹网罩 Concave grid 753N40			
型号 MODEL	H	t		型号 MODEL	H	t	
YD(S)WF102L70P4-753N-630	100	80		YD(S)WF102L70P4-753N-630	70	110	
YD(S)WF102L70P6-753N-630	100	80		YD(S)WF102L70P6-753N-630	70	110	
YD(S)WF102L70P8-753N-630	100	80		YD(S)WF102L70P8-753N-630	70	110	

□-750H

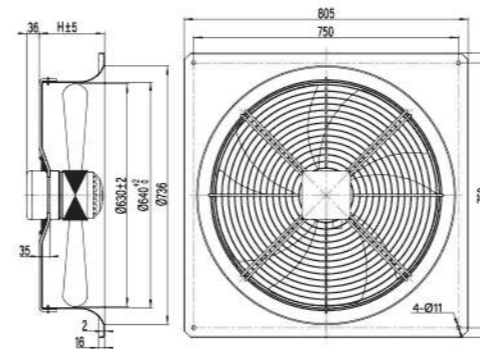

带导风圈(大) Wall plate 750H		带翻边导风圈 Flanging wall plate 750H	
型号 MODEL	H	型号 MODEL	H
YD(S)WF102L70P4-750H-630	185	YD(S)WF102L70P4-750H-630	190
YD(S)WF102L70P6-750H-630	185	YD(S)WF102L70P6-750H-630	190
YD(S)WF102L70P8-750H-630	185	YD(S)WF102L70P8-750H-630	190


□-690G

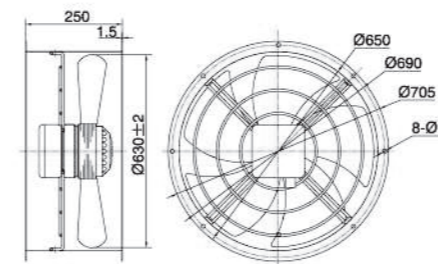

带风筒 Air duct 690G

型号 MODEL
YD(S)WF102L70P4-690G-630
YD(S)WF102L70P6-690G-630
YD(S)WF102L70P8-690G-630

□-735G

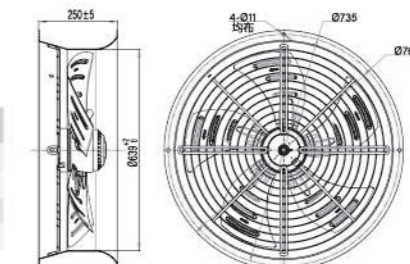

带高效风筒 Air duct 735G

型号 MODEL
YDWF102L70P4-735G-630
YSWF102L70P4-735G-630

□-其他安装附件 Others



平板网罩 Flat screen grid 753P			平板网罩 Flat net grid 753B			凹板网罩 Concave flat grid 753NB		
型号 MODEL	H	t	型号 MODEL	H	t	型号 MODEL	H	t
YD(S)WF102L70P4-753P-630	100	57	YD(S)WF102L70P4-753B-630	—	157	YD(S)WF102L70P4-753NB-630	—	180
YD(S)WF102L70P6-753P-630	100	57	YD(S)WF102L70P6-753B-630	—	157	YD(S)WF102L70P6-753NB-630	—	180
YD(S)WF102L70P8-753P-630	100	57	YD(S)WF102L70P8-753B-630	—	157	YD(S)WF102L70P8-753NB-630	—	180

1. Specifications might change without notice;

2. Special design on request

Ø 630



AC AXIAL FAN

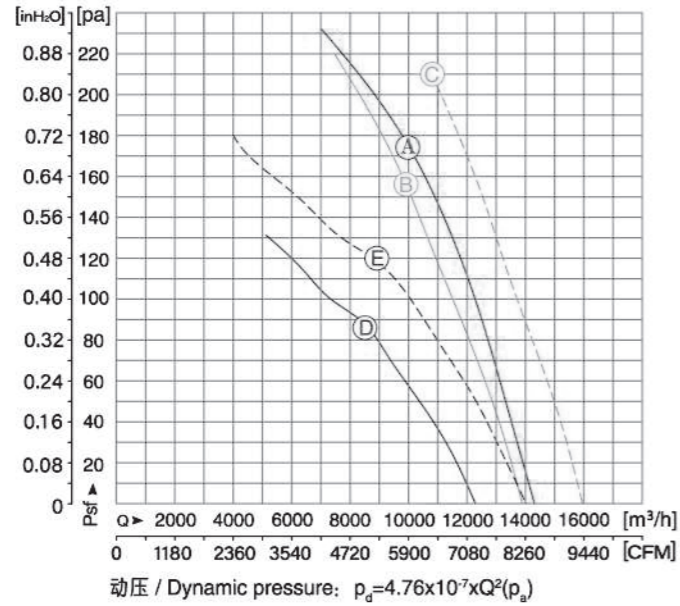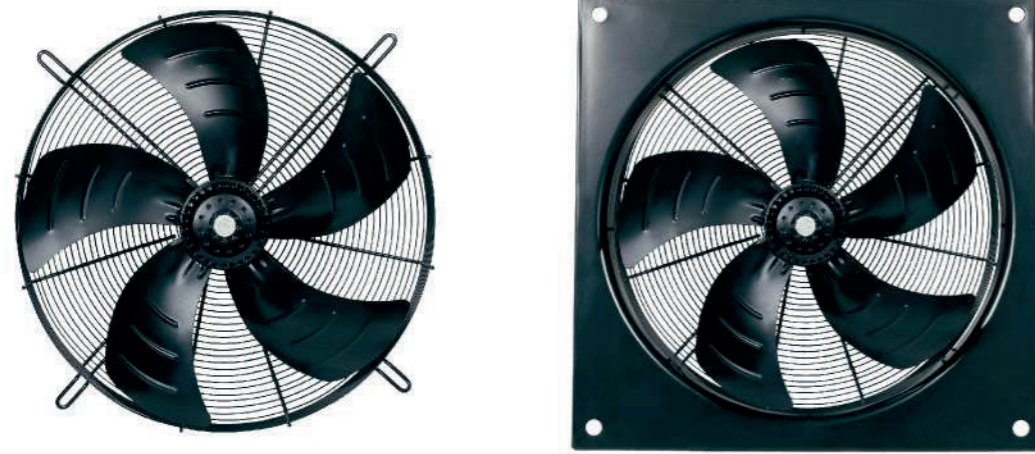

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF127L50P4-□-630	3~380	50	—	Ⓐ	1442	1369	2.65	177	-40~+75	ERP2026*	78	
YSWF127L50P4-□-630	3~380	50	—	Ⓑ	1219	1397	2.34	156	-40~+65	ERP2026*	77	
		60		Ⓒ	1954	1563	3.25	212	-40~+50	ERP2026	80	
YSWF127L50P6-□-630	3~380	50	—	Ⓓ	777	906	1.69	89	-40~+65	ERP2026	71	
		60		Ⓔ	1172	1014	2.07	120	-40~+55	ERP2026	74	

Ø 630


AC AXIAL FAN

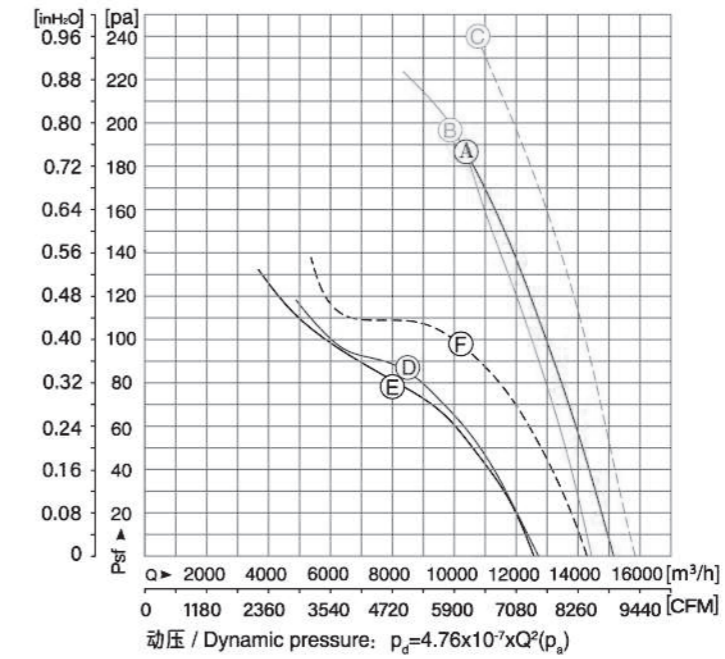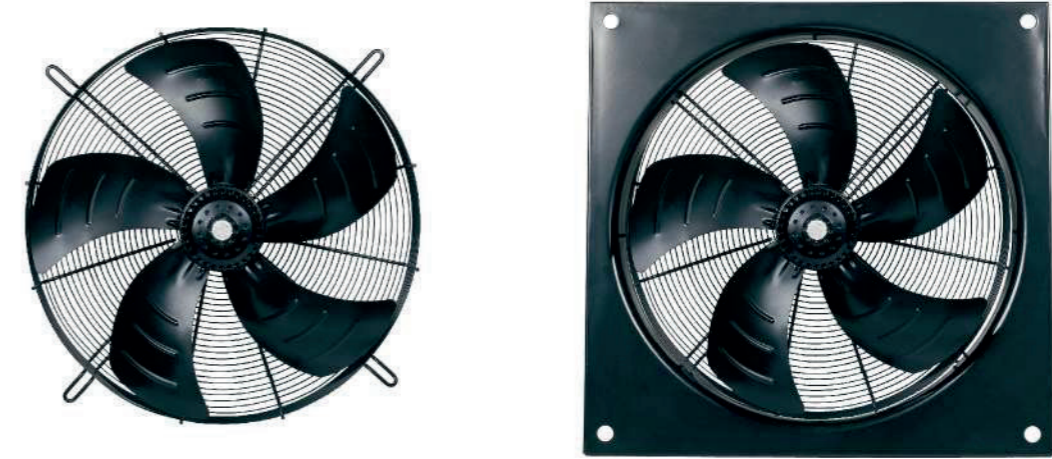

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF127L65P4-□-630	3~380	50	—	Ⓐ	1646	1392	3.33	188	-40~+60	ERP2026*	80	
YSWF127L65P4-□-630	3~380	50	—	Ⓑ	1549	1401	3.16	198	-40~+65	ERP2026*	78	
		60		Ⓒ	2108	1614	3.66	241	-40~+55	ERP2026*	82	
YSWF127L65P6-□-630	3~380	50	—	Ⓓ	983	922	2.46	84	-40~+65	ERP2026	73	
YSWF127L65P6-□-630	3~380	50	—	Ⓔ	882	932	2.17	81	-40~+70	ERP2026	72	
		60		Ⓕ	1297	1058	2.46	98	-40~+60	ERP2026	75	

Ø 630

AC AXIAL FAN

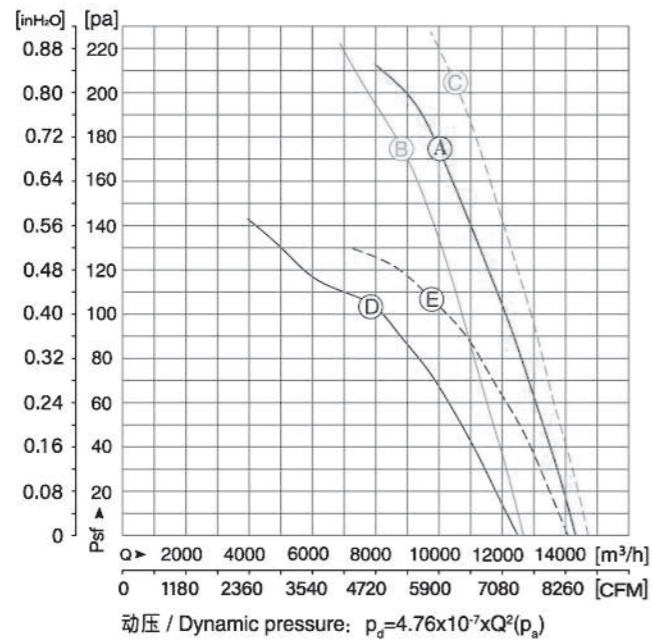


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF127L50P4-□-630-7	3~380	50	—	Ⓐ	1453	1363	2.62	176	-40~+55	ERP2026*	78	
YSWF127L50P4-□-630-7	3~380	50	—	Ⓑ	1197	1394	2.30	177	-40~+70	ERP2026*	75	
		60		Ⓒ	1795	1576	3.00	206	-40~+50	ERP2026*	80	
YSWF127L50P6-□-630-7	3~380	50	—	Ⓓ	842	907	1.79	104	-40~+65	ERP2026	71	
		60		Ⓔ	1180	1011	2.10	108	-40~+65	ERP2026	74	

1. Specifications might change without notice;

2. Special design on request

Ø 630

AC AXIAL FAN

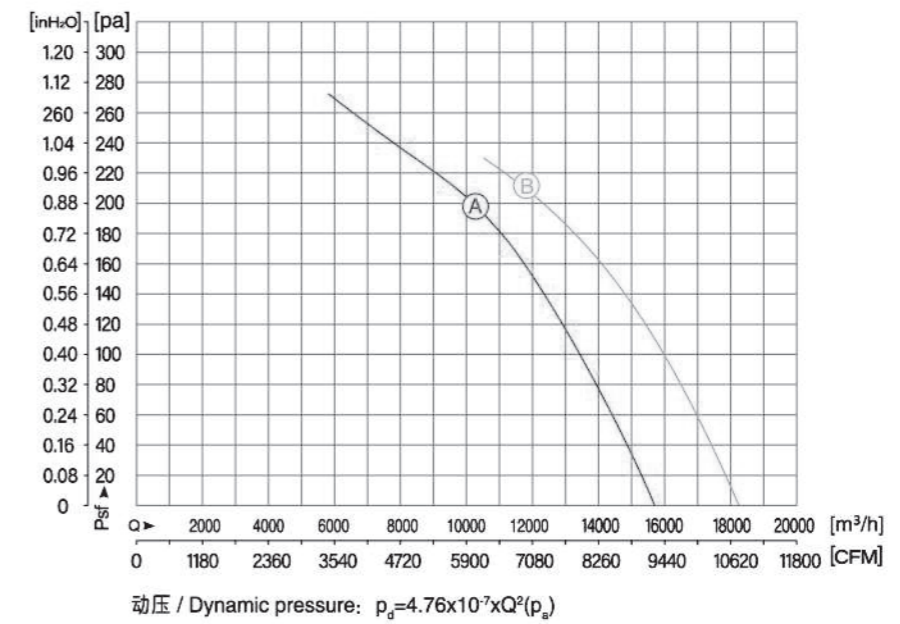


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF127L65P4-735G-630	3~380	50	—	Ⓐ	1549	1401	3.16	198	-40~+60	ERP2026*	79	
YSWF127L80P4-735G-630-7	3~380	50	—	Ⓑ	2385	1377	4.36	211	-40~+50	ERP2026	79	

1. Specifications might change without notice;

2. Special design on request

**Ø 630**

AC AXIAL FAN

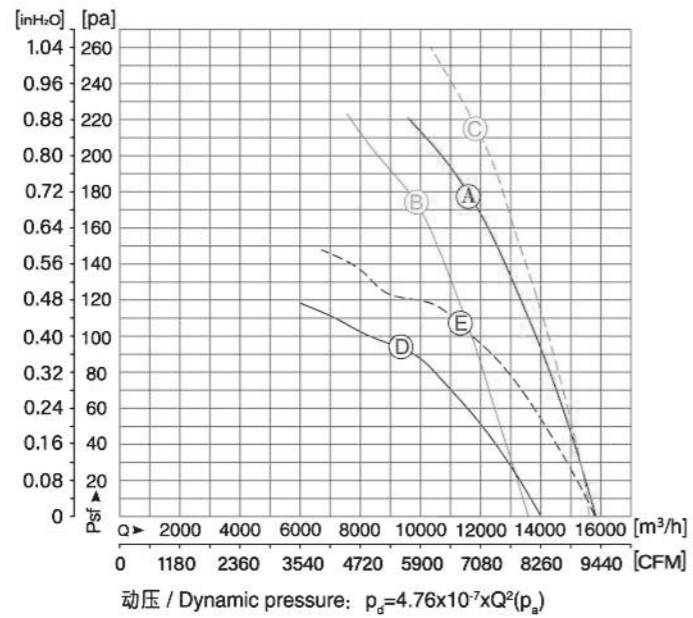


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF127L65P4-□-630-7	3~380	50	—	Ⓐ	1706	1395	3.22	179	-40~+55	ERP2026*	79	
YSWF127L65P4-□-630-7	3~380	50	—	Ⓑ	1338	1422	2.79	176	-40~+65	ERP2026*	76	
		60		Ⓒ	2027	1640	3.50	218	-40~+55	ERP2026*	81	
YSWF127L65P6-□-630-7	3~380	50	—	Ⓓ	1027	919	2.30	91	-40~+65	ERP2026	72	
		60		Ⓔ	1506	1030	2.73	106	-40~+50	ERP2026	75	

1. Specifications might change without notice;

2. Special design on request

**Ø 630**

AC AXIAL FAN

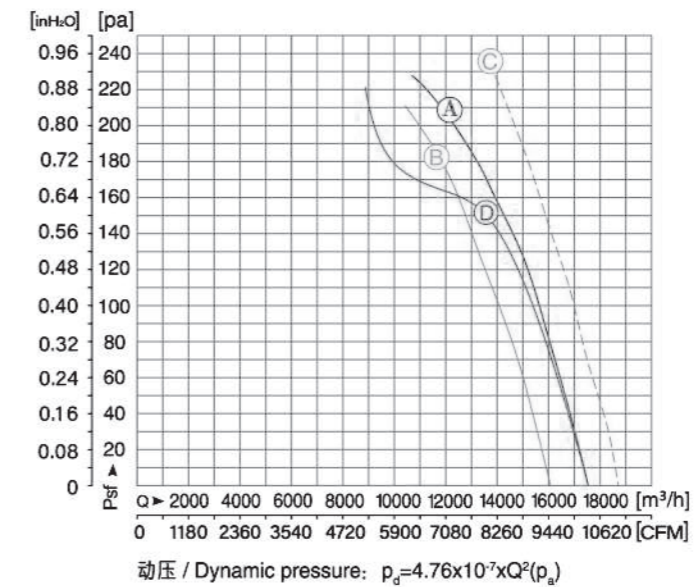


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF127L80P4-□-630-7	3~380	50	—	Ⓐ	2331	1395	4.48	207	-40~+50	ERP2026	81	
YSWF127L80P4-□-630-7	3~380	50	—	Ⓑ	1712	1420	3.49	186	-40~+60	ERP2026*	79	
		60		Ⓒ	2636	1631	4.47	236	-40~+50	ERP2026	83	
YSWF138L100P4-□-630PA	3~380	50	—	Ⓓ	2680	1389	4.50	150	-40~+70	ERP2026	81	塑料叶片 Plastic blades

1. Specifications might change without notice;

2. Special design on request


**Ø 630**

INSTALLATION ACCESSORIES

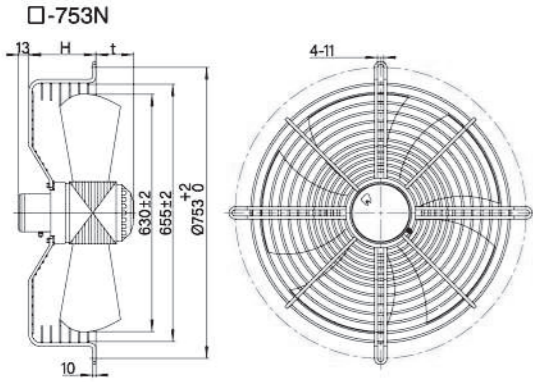

常规凹网罩 Concave grid 753N

型号 MODEL	H	t
YSWF127L50P4-753N-630	100	90
YSWF127L50P6-753N-630	100	90
YSWF127L65P4-753N-630	100	105
YSWF127L65P6-753N-630	100	105
YSWF127L80P4-753N-630	100	120
YSWF138L100P4-753N-630PA	100	136

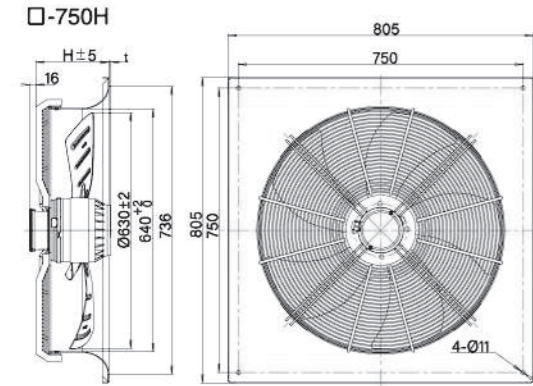


带网罩(大R) Wall plate 750H

型号 MODEL	H	t
YSWF127L50P4-750H-630	195	5
YSWF127L50P6-750H-630	195	5
YSWF127L65P4-750H-630	195	20
YSWF127L65P6-750H-630	195	20
YSWF127L80P4-750H-630	195	35
YSWF138L100P4-750H-630PA	195	51


带翻边网罩 Flanging wall plate 750H

型号 MODEL	H	t
YSWF127L50P4-750H-630	215	—
YSWF127L50P6-750H-630	215	—
YSWF127L65P4-750H-630	215	8
YSWF127L65P6-750H-630	215	8
YSWF127L80P4-750H-630	215	23
YSWF138L100P4-750H-630PA	215	32

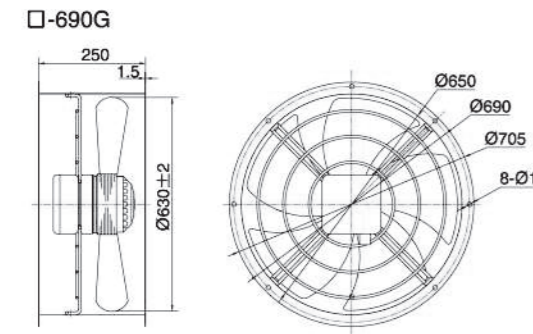

带风筒 Air duct 690G

型号 MODEL
YSWF127L50P4-690G-630
YSWF127L50P6-690G-630
YSWF127L65P4-690G-630
YSWF127L65P6-690G-630
YSWF127L80P4-690G-630
YSWF138L100P4-690G-630PA

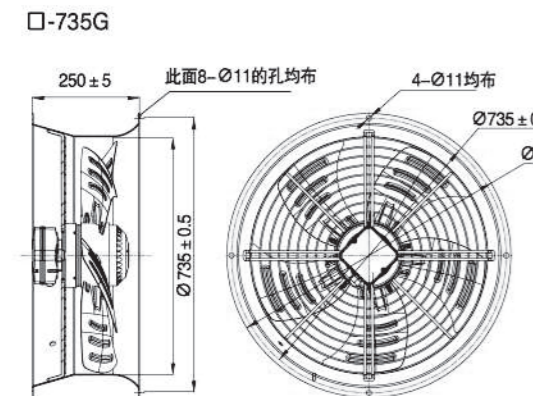

带风筒 Air Duct 735G

型号 MODEL
YSWF127L65P4-735G-630
YSWF127L80P4-735G-630-7
YSWF138L100P4-735G-630PA




□-其他安装附件 Others

平板网罩 Flat net grid 753B

型号 MODEL	h	t
YSWF127L50P4-753B-630	—	168
YSWF127L50P6-753B-630	—	168
YSWF127L65P4-753B-630	—	183
YSWF127L65P6-753B-630	—	183
YSWF127L80P4-753B-630	—	198

**Ø 630**

AC AXIAL FAN

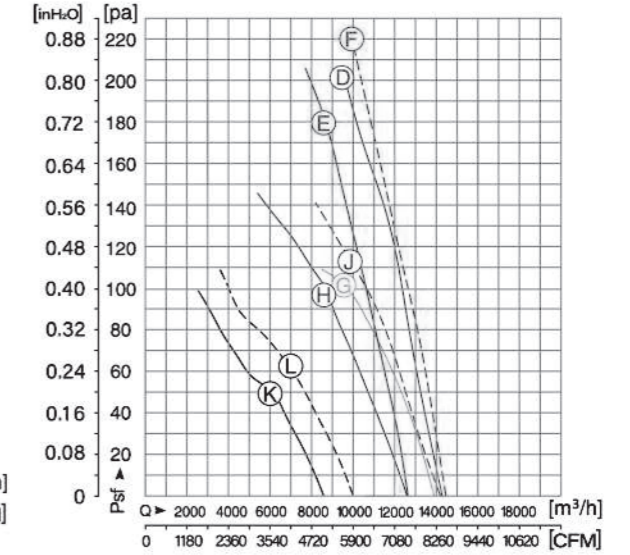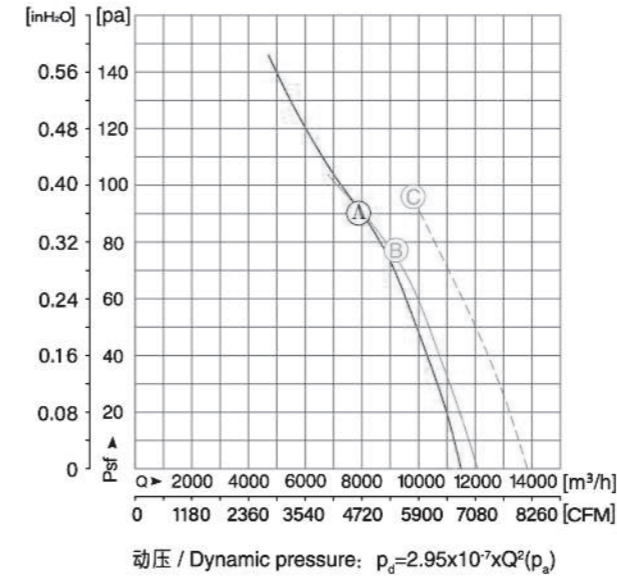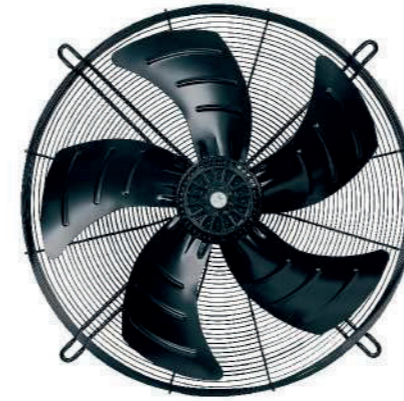

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YDWF127L50P6-□-710	1~220	50	20	(A)	612	930	2.82	90	-40~+70	ERP2026*	73	
YDWF127L50P6-□-710	1~220	50	20	(B)	692	917	3.17	77	-40~+70	ERP2026	74	
		60		(C)	1062	982	4.82	98	-40~+60	ERP2026	76	
YSWF127L50P4-□-710	3~380	50	—	(D)	1494	1368	2.74	201	-40~+55	ERP2026*	80	
YSWF127L50P4-□-710	3~380	50	—	(E)	1229	1388	2.33	181	-40~+60	ERP2026*	78	
		60		(F)	1917	1551	3.21	220	-40~+60	ERP2026	81	
YSWF127L50P6-□-710	3~380	50	—	(G)	923	903	2.1	103	-40~+70	ERP2026	73	
YSWF127L50P6-□-710	3~380	50	—	(H)	714	930	1.9	99	-40~+70	ERP2026*	73	
		60		(J)	1014	1064	2.1	112	-40~+70	ERP2026	76	
YSWF127L50P8-□-710	3~380	50	—	(K)	315	703	0.89	51	-40~+70	ERP2026*	62	
		60		(L)	439	802	0.91	63	-40~+70	ERP2026	65	

1. Specifications might change without notice;



2. Special design on request

1. Specifications might change without notice;

2. Special design on request

# Ø 710

## AC AXIAL FAN

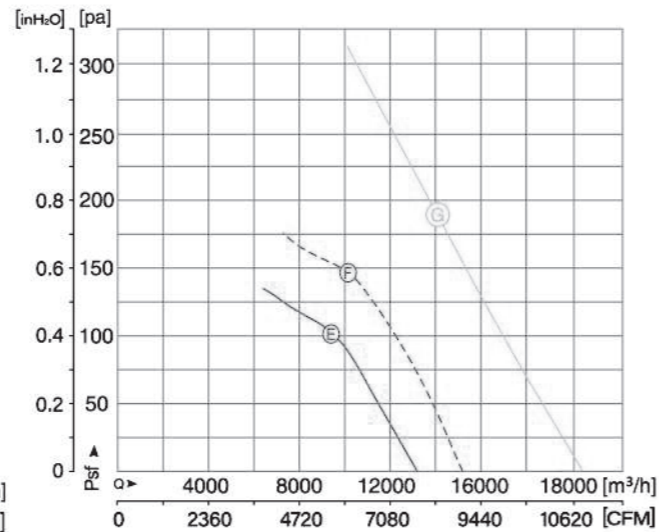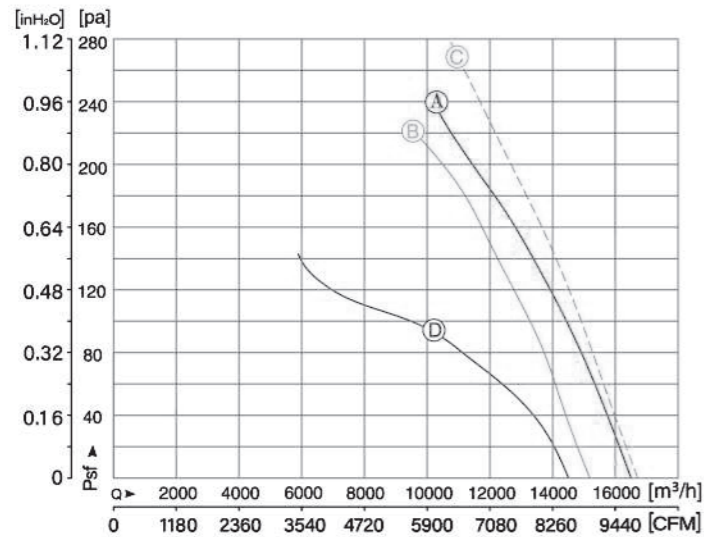

动压 / Dynamic pressure:  $p_d = 2.95 \times 10^{-7} \times Q^2 (p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L65P4-□-710	3~380	50	—	Ⓐ	1862	1383	3.56	240	-40~+50	ERP2026*	81	
YSWF127L65P4-□-710	3~380	50	—	Ⓑ	1621	1399	2.98	222	-40~+55	ERP2026*	80	
YSWF127L65P4-□-710	3~380	60	—	Ⓒ	2340	1594	3.98	278	-40~+50	ERP2026*	83	
YSWF127L65P6-□-710	3~380	50	—	Ⓓ	1022	922	2.49	93	-40~+70	ERP2026	75	
YSWF127L65P6-□-710	3~380	50	—	Ⓔ	803	944	2.33	102	-40~+75	ERP2026*	74	
YSWF127L65P6-□-710	3~380	60	—	Ⓕ	1205	1081	2.47	148	-40~+75	ERP2026*	77	
YSWF127L80P4-840N-710	3~380	50	—	Ⓖ	2170	1396	3.80	223	-40~+60	ERP2026*	82	

1. Specifications might change without notice;

2. Special design on request

# Ø 710

## AC AXIAL FAN

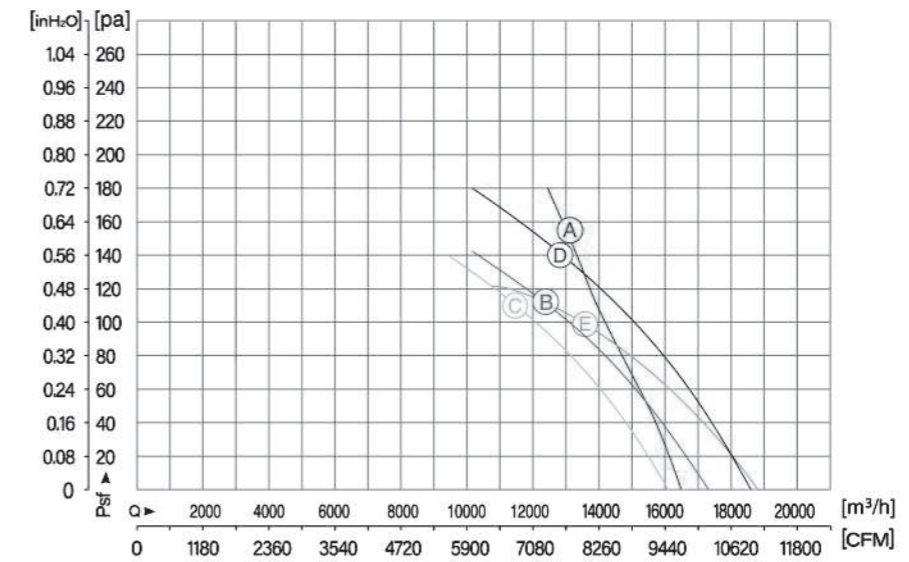

动压 / Dynamic pressure:  $p_d = 2.95 \times 10^{-7} \times Q^2 (p_a)$



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L50P4-805G-710	3~380	50	—	Ⓐ	1498	1374	2.54	156	-40~+60	ERP2026*	80	
YSWF127L65P6-805G-710	3~380	50	—	Ⓑ	1071	910	2.23	112	-40~+70	ERP2026*	75	
YSWF127L65P6-805G-710	3~380	50	—	Ⓒ	964	921	2.19	112	-40~+70	ERP2026*	74	
YSWF127L65P6-805G-710	3~380	60	—	Ⓓ	1423	1035	2.61	140	-40~+60	ERP2026*	77	
YSWF127L80P6-805G-710-7	3~380	50	—	Ⓔ	1410	916	3.00	99	-40~+60	ERP2026	75	

1. Specifications might change without notice;

2. Special design on request

# Ø 710

## AC AXIAL FAN

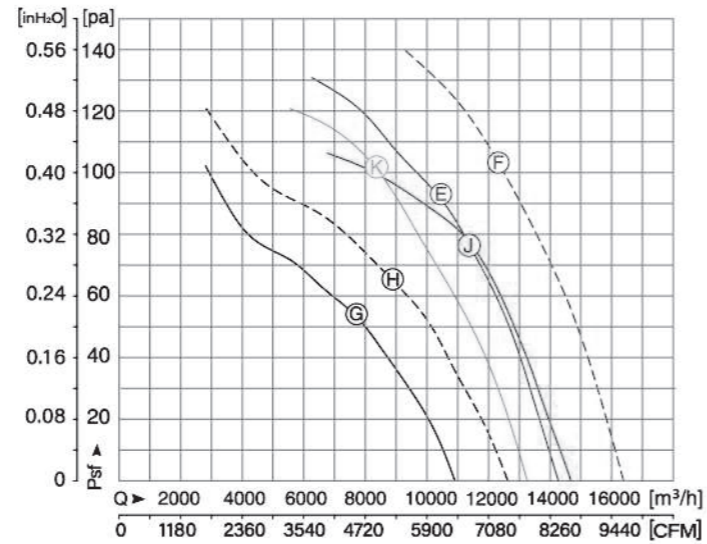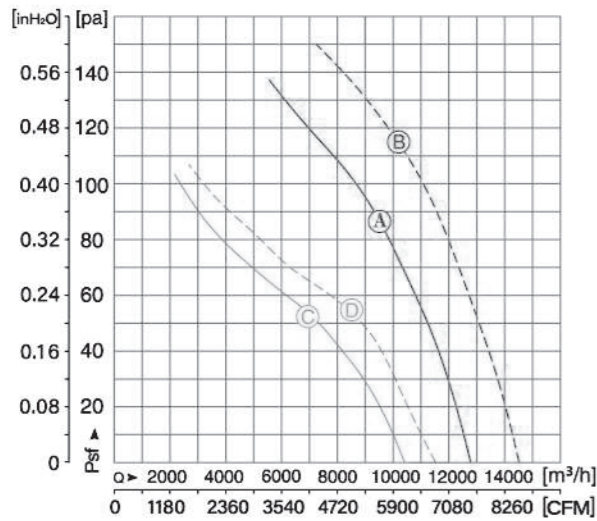


动压 / Dynamic pressure:  $p_d = 2.95 \times 10^{-7} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF127L50P6-□-710-7	3~380	50	—	Ⓐ	791	922	1.77	87	-40~+65	ERP2026	74	
		60		Ⓑ	1198	1023	2.14	116	-40~+60	ERP2026	77	
YSWF127L50P8-□-710-7	3~380	50	—	Ⓒ	496	669	1.10	53	-40~+65	ERP2026	64	
		60		Ⓓ	665	733	1.24	55	-40~+65	ERP2026	67	
YSWF127L65P6-□-710-7	3~380	50	—	Ⓔ	985	921	2.28	92	-40~+65	ERP2026	75	
		60		Ⓕ	1495	1027	2.75	124	-40~+60	ERP2026	78	
YSWF127L65P8-□-710-7	3~380	50	—	Ⓖ	580	683	1.45	54	-40~+65	ERP2026	65	
		60		Ⓗ	792	760	1.57	65	-40~+65	ERP2026	68	
YSWF127L65P6-□-710-7	3~380	50	—	Ⓙ	1143	913	2.53	77	-40~+55	ERP2026	78	
YSWF127L50P6-□-710-7	3~380	50	—	Ⓚ	953	901	1.99	101	-40~+55	ERP2026	73	


# Ø 710

## INSTALLATION ACCESSORIES

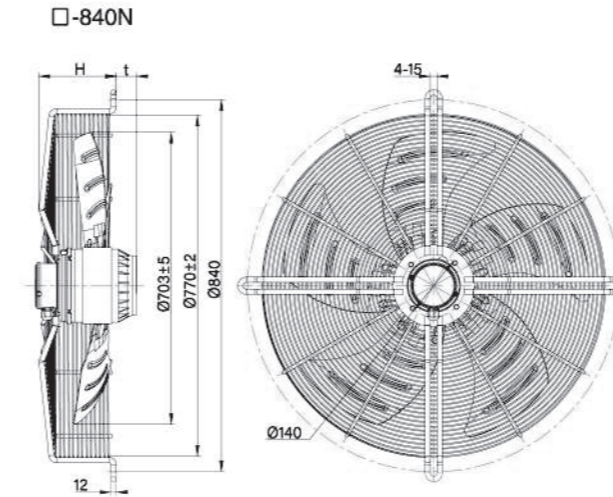

常规凹网罩 Concave grid 840N


型号 MODEL	H	t
YD(S)WF127L50P6-840N-710	175	30
YSWF127L50P4-840N-710	175	30
YSWF127L50P8-840N-710	175	30
YSWF127L65P4-840N-710	175	45
YSWF127L65P6-840N-710	175	45
YSWF127L80P4-840N-710	175	60

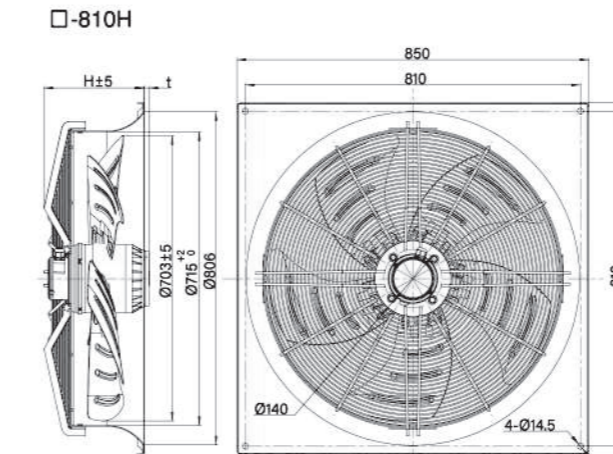

带导风圈(大R) Wall plate810H 带翻边导风圈 Flanging wall plate 810H

型号 MODEL	H	t	型号 MODEL	H	t
YD(S)WF127L50P6-810H-710	242	—	YD(S)WF127L50P6-810H-710	246	—
YSWF127L50P4-810H-710	242	—	YSWF127L50P4-810H-710	246	—
YSWF127L50P8-810H-710	242	—	YSWF127L50P8-810H-710	246	—
YSWF127L65P4-810H-710	242	—	YSWF127L65P4-810H-710	246	—
YSWF127L65P6-810H-710	242	—	YSWF127L65P6-810H-710	246	—
YSWF127L80P4-810H-710	242	12	YSWF127L80P4-810H-710	246	15

□-805G

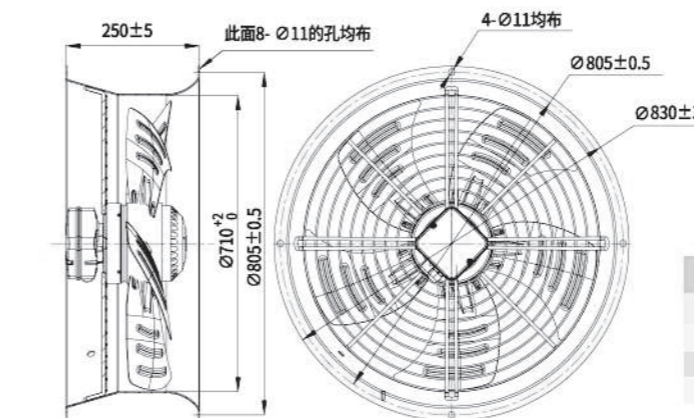

带风筒 Air Duct 805G

型号 MODEL
YSWF127L50P4-805G-710
YSWF127L65P6-805G-710
YSWF127L80P6-805G-710-7

Ø 710



AC AXIAL FAN



叶轮材质: 铝合金式  
铝合金塑料混合式




Impeller Material: Aluminum  
Hybrid

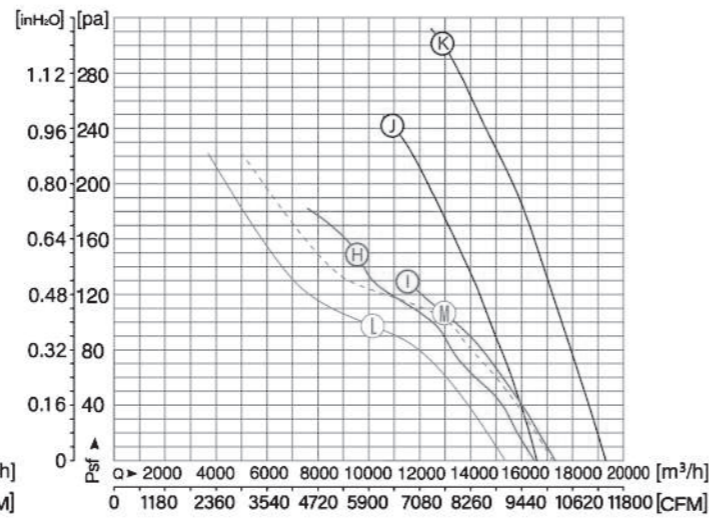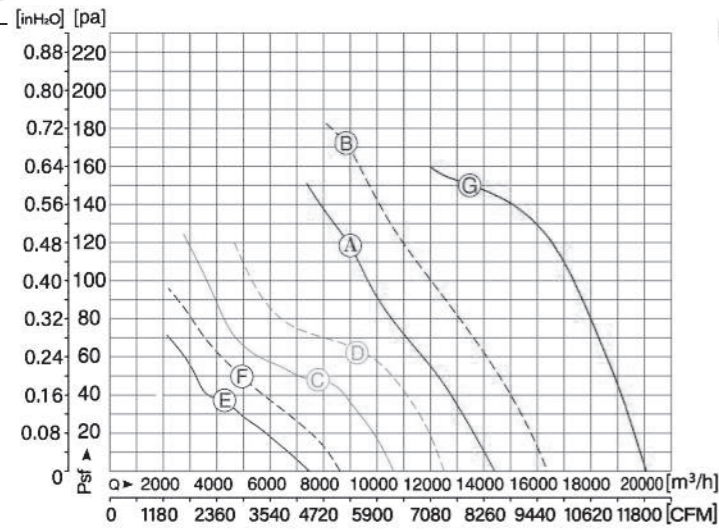

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB/(A)	
YSWF138L76P6-□-710PA	3~380	50	—	Ⓐ	1119	910	2.12	119	-40~+75	ERP2026	71	
		60		Ⓑ	1728	998	2.91	173	-40~+70	ERP2026	75	
YSWF138L76P8-□-710PA	3~380	50	—	Ⓒ	494	717	1.47	46	-40~+70	ERP2026	65	
		60		Ⓓ	703	835	1.46	66	-40~+70	ERP2026	68	
YSWF138L76P12-□-710PA	3~380	50	—	Ⓔ	215	473	0.90	35	-40~+70	ERP2026	57	
		60		Ⓕ	214	548	0.80	50	-40~+70	ERP2026*	60	
YSWF138L100P4-□-710PA	3~380	50	—	Ⓖ	2733	1352	4.66	149	-40~+60	ERP2026	86	
YSWF138L76P6-□-710	3~380	50	—	Ⓗ	1197	930	2.37	148	-40~+75	ERP2026*	71	铝风叶 Aluminum vane
		60		Ⓘ	1589	1019	2.75	129	-40~+55	ERP2026	75	
YSWF138L100P4-□-710PA	3~380	50	—	Ⓙ	1984	1410	3.76	242	-40~+75	ERP2026*	84	
		60		Ⓚ	3154	1606	5.33	302	-40~+55	ERP2026	86	
YSWF138L76P6-□-710PA	3~380	50	—	Ⓛ	1098	908	2.06	96	-40~+70	ERP2026	71	+3°
		60		Ⓜ	1664	1009	2.88	103	-40~+70	ERP2026	75	

Ø 710



AC AXIAL FAN

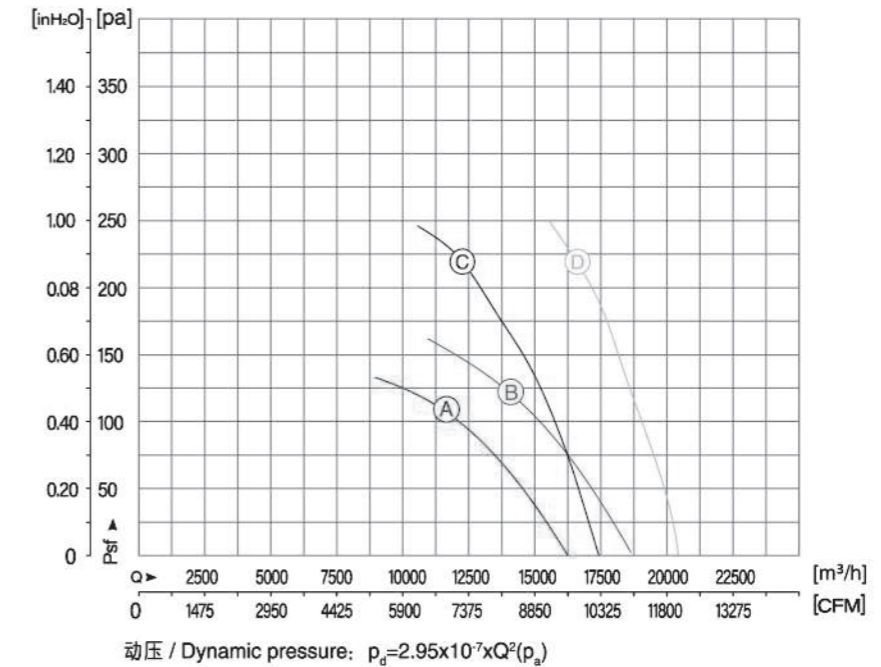

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB/(A)	
YSWF138L76P6-805G-710PA	3~380	50	—	Ⓐ	1023	929	2.08	105	-40~+70	ERP2026*	69	
		60		Ⓑ	1601	1047	2.76	140	-40~+70	ERP2026	73	
YSWF138L100P4-805G-710PA	3~380	50	—	Ⓒ	1820	1425	3.43	217	-40~+60	ERP2026*	81	
		60		Ⓓ	2708	1651	4.44	216	-40~+60	ERP2026*	83	

# Ø 710

## AC AXIAL FAN

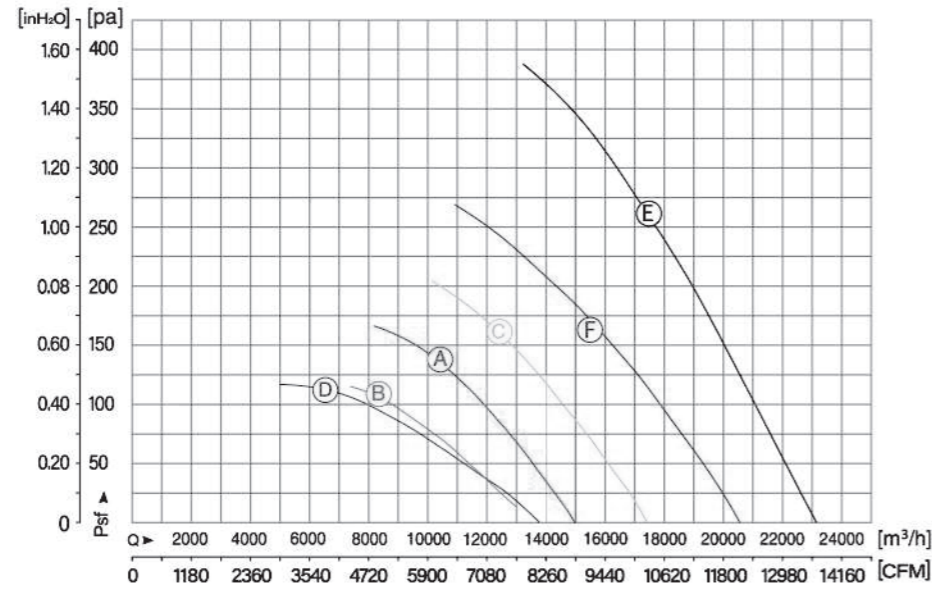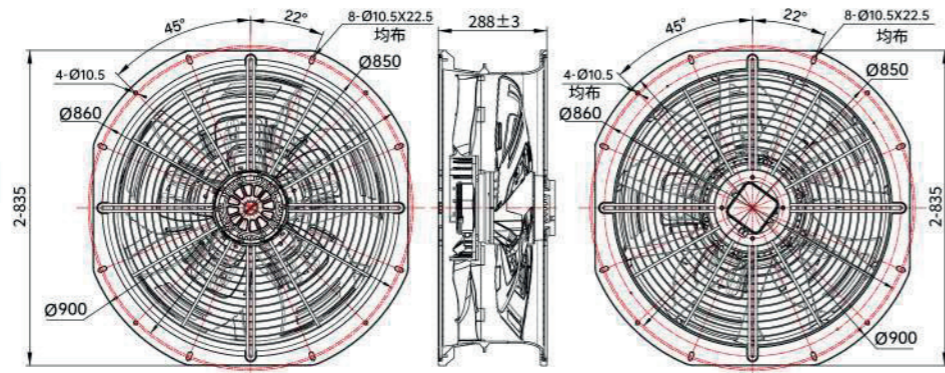

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF138L76P6-860G-710PA	3~400	50	—	(A)	999	927	1.92	143	-40~+70	ERP2026*	70	△
		50	—	(B)	774	791	1.27	125	-40~+60	ERP2026*	67	Y
		60	—	(C)	1531	1051	2.57	184	-40~+70	ERP2026*	71	△
		60	—	(D)	997	768	3.34	91	-40~+55	ERP2026	67	Y
YSWF138L118P4-860G-710PA	3~400	50	—	(E)	3391	1386	5.79	341	-40~+70	ERP2026*	79	△
		50	—	(F)	2576	1160	4.1	241	-40~+50	ERP2026	73	Y


1. Specifications might change without notice;

2. Special design on request

# Ø 710


## INSTALLATION ACCESSORIES

### □-840N

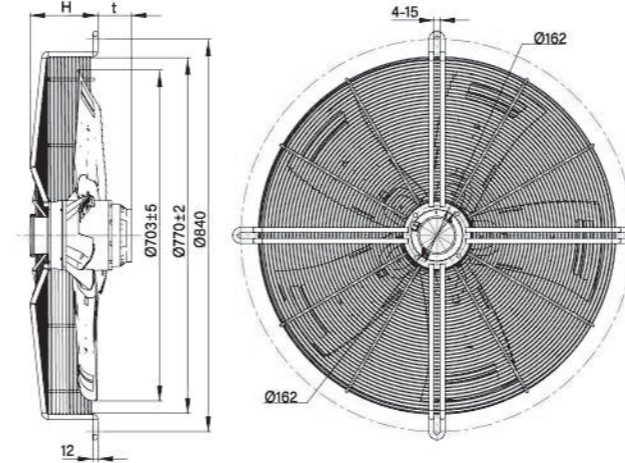


常规凹网罩 Concave grid 840N		
型号 MODEL	H	t
YSWF138L76P6-840N-710	175	53
YSWF138L76P8-840N-710	175	53
YSWF138L76P12-840N-710	175	53
YSWF138L100P4-840N-710	175	77
YSWF138L100P6-840N-710	175	77

### □-810H

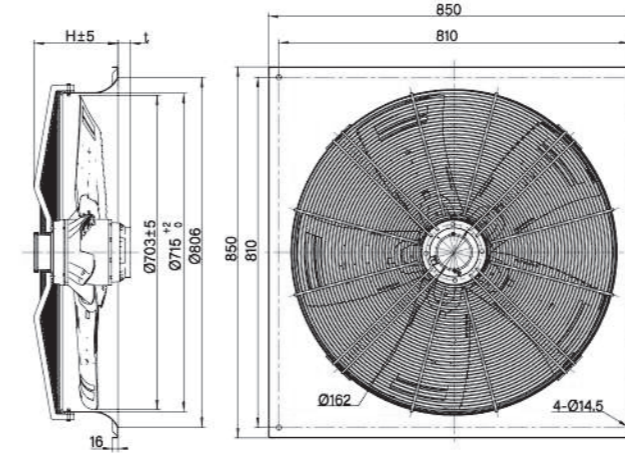

带墙风圈(大R) Wall plate 810H			带翻墙风圈 Flanging wall plate 810H		
型号 MODEL	H	t	型号 MODEL	H	t
YSWF138L76P6-810H-710	242	5	YSWF138L76P6-810H-710	246	5
YSWF138L76P8-810H-710	242	5	YSWF138L76P8-810H-710	246	5
YSWF138L76P12-810H-710	242	5	YSWF138L76P12-810H-710	246	5
YSWF138L100P4-810H-710	242	30	YSWF138L100P4-810H-710	246	30
YSWF138L100P6-810H-710	242	30	YSWF138L100P6-810H-710	246	30

### □-805G

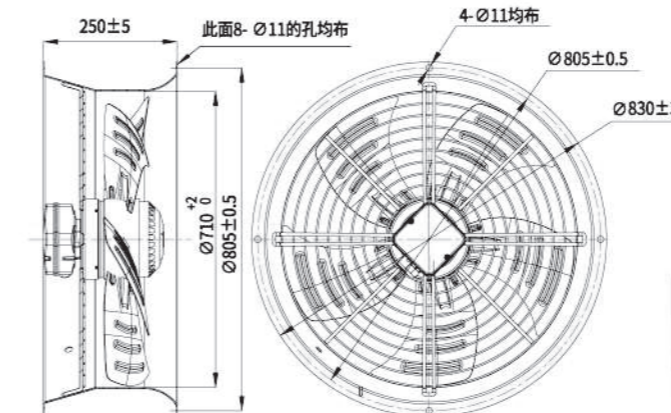


带高效风筒 Air duct 805G	
型号 MODEL	
YSWF138L100P4-805G-710	
YSWF138L76P6-805G-710	

1. Specifications might change without notice;

2. Special design on request



Ø 800

AC AXIAL FAN

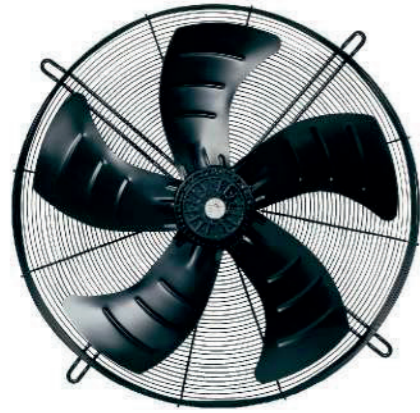


Ø 800

AC AXIAL FAN

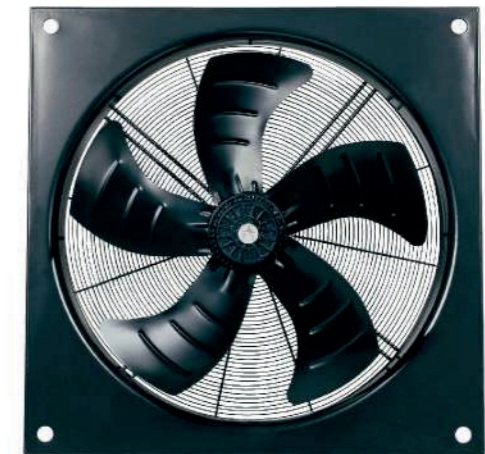
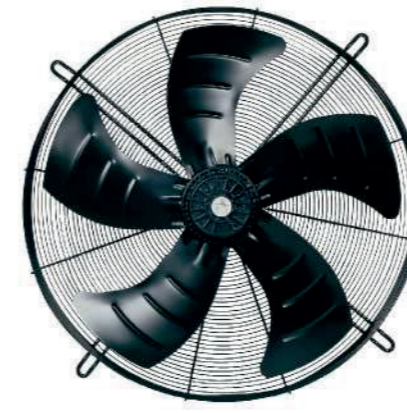


78

AC INDUSTRIAL FAN

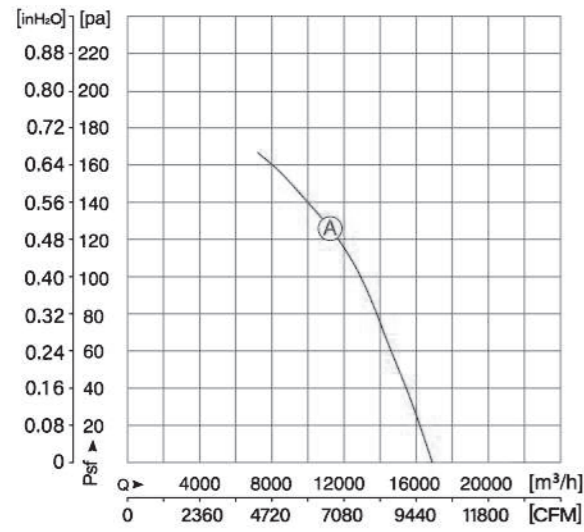

动压/ Dynamic pressure:  $p_d = 1.83 \times 10^{-7} \times Q^2 (p_a)$

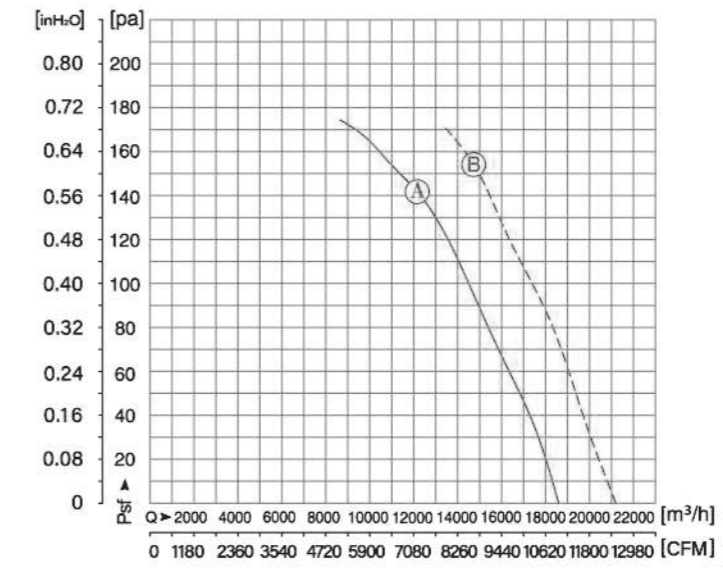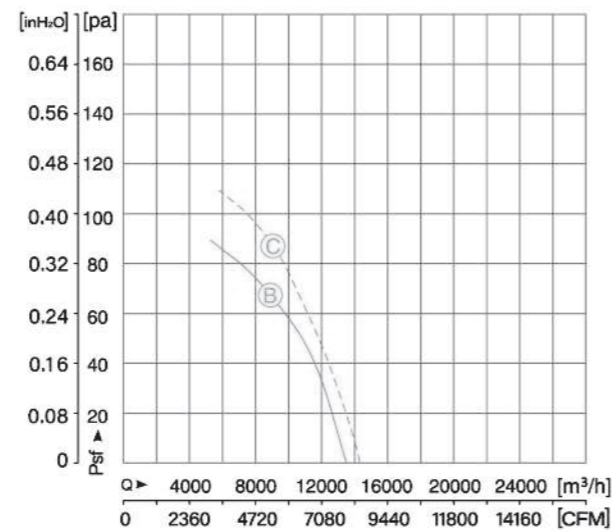

动压/ Dynamic pressure:  $p_d = 1.83 \times 10^{-7} \times Q^2 (p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L65P6-□-800	3~380	50	—	(A)	1126	906	2.44	124	-40~+70	ERP2026*	77	
YSWF127L65P8-□-800	3~380	50	—	(B)	704	661	1.63	68	-40~+65	ERP2026*	75	
		60		(C)	834	747	1.65	85	-40~+65	ERP2026*	77	


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L80P6-□-800	3~380	50	—	(A)	1369	927	3.36	142	-40~+65	ERP2026*	78	
		60		(B)	1918	1057	3.68	155	-40~+60	ERP2026	80	

79

AC INDUSTRIAL FAN

Ø 800

AC AXIAL FAN

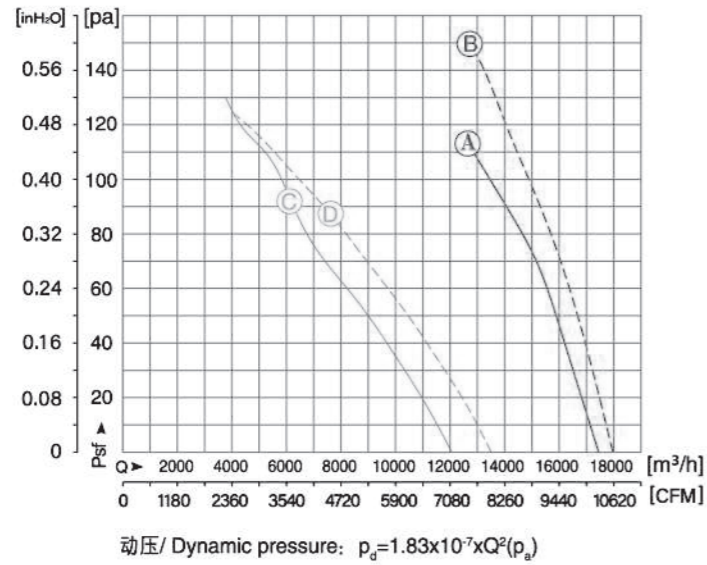


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L65P6-□-800-7	3~380	50	—	Ⓐ	1345	895	2.94	116	-40~+60	ERP2026	78	
		60		Ⓑ	1627	1023	3.05	149	-40~+50	ERP2026	80	
YSWF127L65P8-□-800-7	3~380	50	—	Ⓒ	716	655	1.52	92	-40~+65	ERP2026	75	
		60		Ⓓ	941	711	1.74	88	-40~+65	ERP2026	77	

1. Specifications might change without notice;

2. Special design on request

Ø 800

AC AXIAL FAN

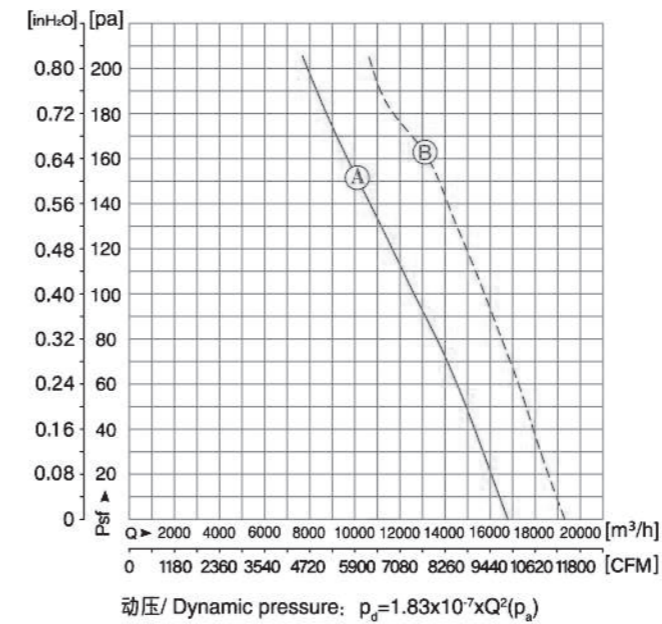

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L80P6-□-800-7	3~380	50	—	Ⓐ	1477	919	3.27	154	-40~+60	ERP2026	79	
		60		Ⓑ	2052	1042	3.73	163	-40~+50	ERP2026	81	
YSWF127L80P8-□-800-7	3~380	50	—	Ⓒ	846	644	1.71	93	-40~+65	ERP2026	76	
		60		Ⓓ	1113	693	2.00	76	-40~+60	ERP2026	78	


1. Specifications might change without notice;

2. Special design on request

Ø 800

INSTALLATION ACCESSORIES


□-920N

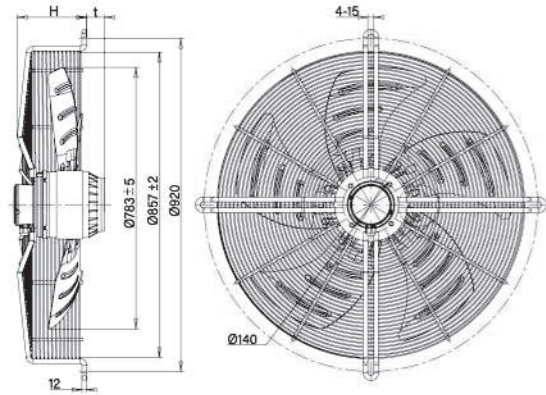

常规凹网罩 Concave grid 920N

型号 MODEL	H	t
YSWF127L65P6-920N-800	175	45
YSWF127L65P8-920N-800	175	45
YSWF127L80P6-920N-800	175	60

□-910H

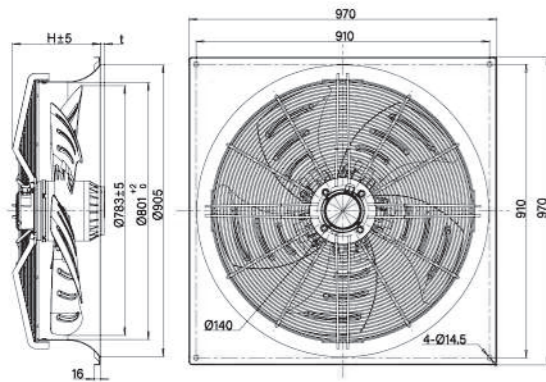

带导风圈 (大R) Wall plate 910H			带翻边导风圈 Flanging wall plate 910H		
型号 MODEL	H	t	型号 MODEL	H	t
YSWF127L65P6-910H-800	248	—	YSWF127L65P6-910H-800	270	—
YSWF127L65P8-910H-800	248	—	YSWF127L65P8-910H-800	270	—
YSWF127L80P6-910H-800	248	5	YSWF127L80P6-910H-800	270	—

Ø 800



AC AXIAL FAN



叶轮材质: 铝合金式  
铝合金塑料混合式




Impeller Material: Aluminum Hybrid

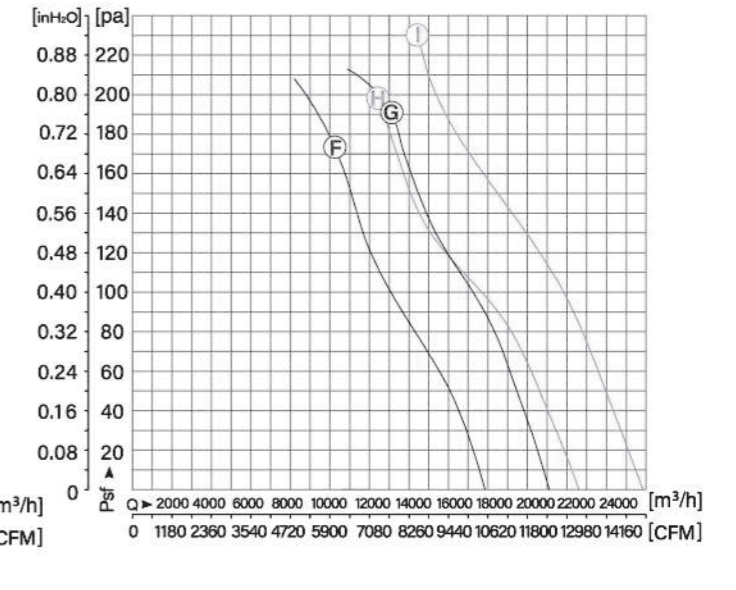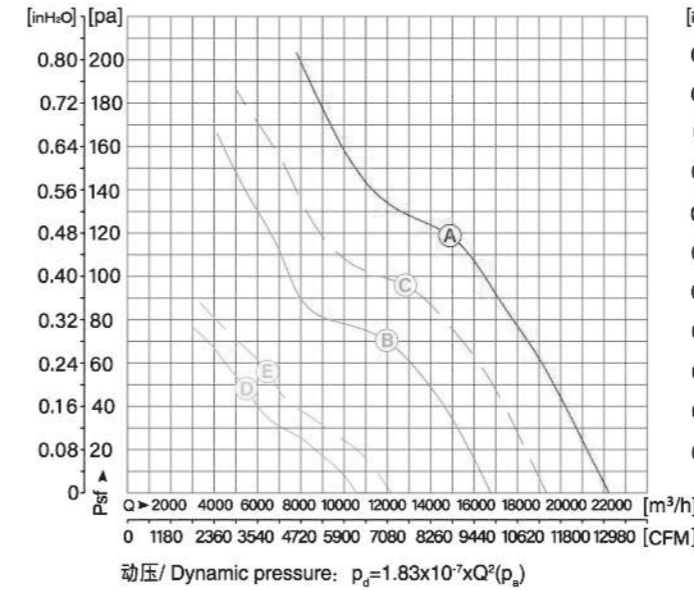

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF138L100P6-□-800PA	3~380	50	—	Ⓐ	1923	925	4.21	119	-40~+65	ERP2026	76	
YSWF138L100P8-□-800PA	3~380	50	—	Ⓑ	918	702	2.30	70	-40~+65	ERP2026	73	
		60		1385	795	2.60	96	-40~+65	ERP2026	75		
YSWF138L76P12-□-800PA	3~380	50	—	Ⓓ	349	444	0.98	48	-40~+65	ERP2026	59	
		60		457	492	1.01	56	-40~+65	ERP2026	62		
YSWF138L100P6-□-800	3~380	50	—	Ⓕ	1475	938	3.62	173	-40~+65	ERP2026*	75	Aluminum vane
		60		2172	1079	4.16	190	-40~+60	ERP2026	77		
YSWF138L118P6-□-800PA	3~380	50	—	Ⓗ	2385	920	5.13	197	-40~+60	ERP2026	76	
		60		3525	1030	6.31	230	-40~+50	ERP2026	78		

Ø 800

INSTALLATION ACCESSORIES

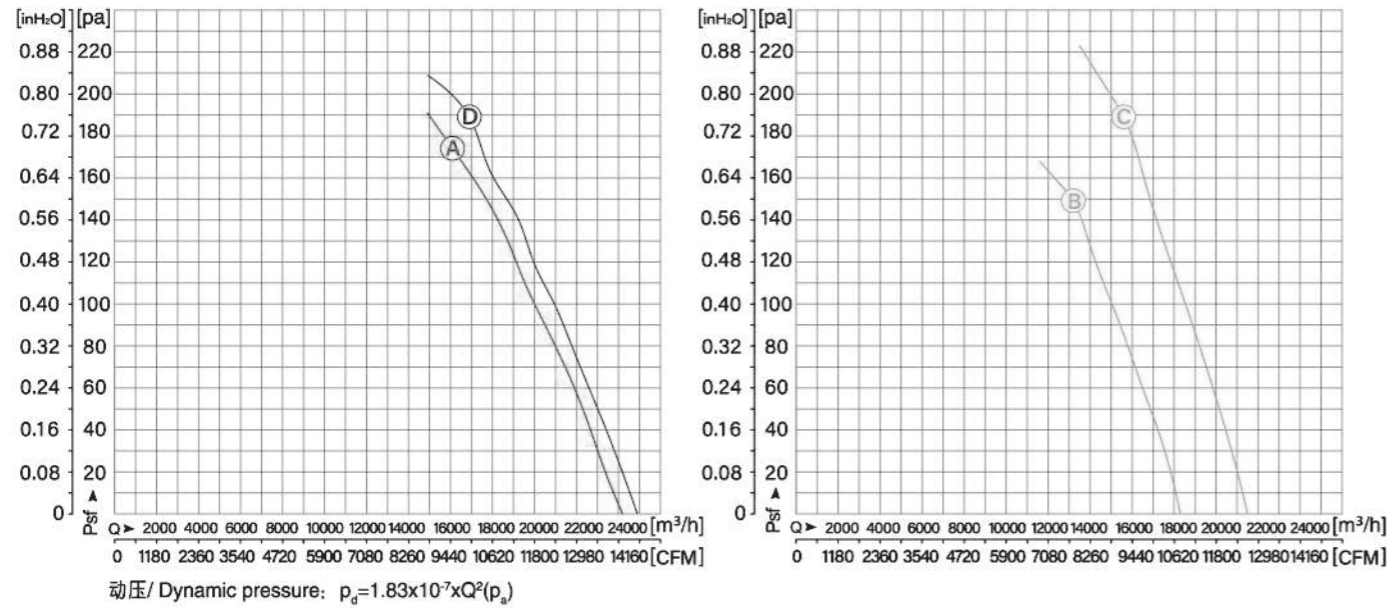


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSWF138L100P6-970G-800PA	3~380	50	—	(A)	1970	909	4.12	174	-40~+65	ERP2026*	76	
	3~380	50	—	(B)	1233	947	3.12	149	-40~+65	ERP2026*	76	
YSWF138L118P6-970G-800PA	3~380	60	—	(C)	1837	1094	3.51	189	-40~+65	ERP2026*	78	
	3~380	50	—	(D)	2179	934	4.62	189	-40~+65	ERP2026*	76	

Ø 800


INSTALLATION ACCESSORIES

□-920N

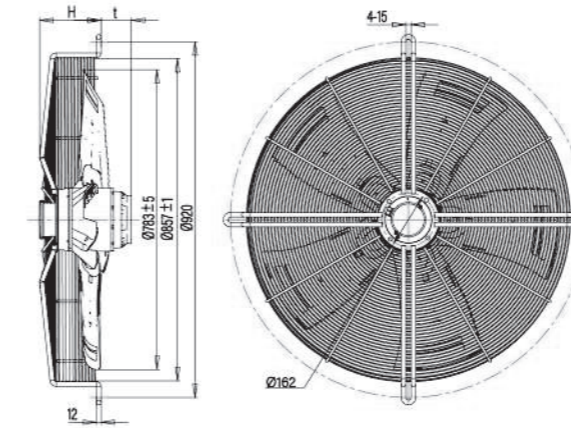


常规凹网罩 Concave grid 920N			
型号 MODEL	H	t	
YSWF138L118P6-920N-800	175	95	
YSWF138L100P6-920N-800	175	77	
YSWF138L100P8-920N-800	175	77	
YSWF138L76P12-920N-800	175	53	

□-910H

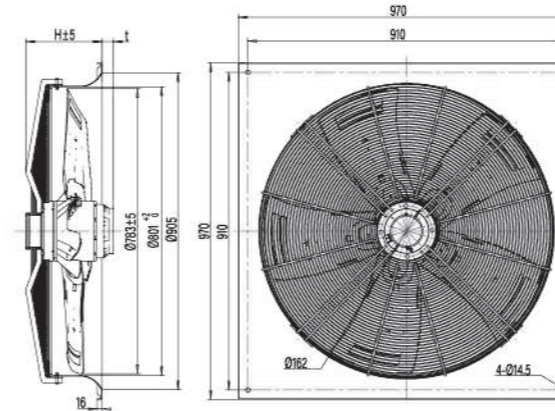

带网罩(大R) Wall plate 910H			带翻边网罩 Flanging wall plate 910H		
型号 MODEL	H	t	型号 MODEL	H	t
YSWF138L118P6-910H-800	248	40	YSWF138L118P6-910H-800	260	20
YSWF138L100P6-910H-800	248	20	YSWF138L100P6-910H-800	260	—
YSWF138L100P8-910H-800	248	20	YSWF138L100P8-910H-800	260	—
YSWF138L76P12-910H-800	248	—	YSWF138L76P12-910H-800	260	—


□-970G

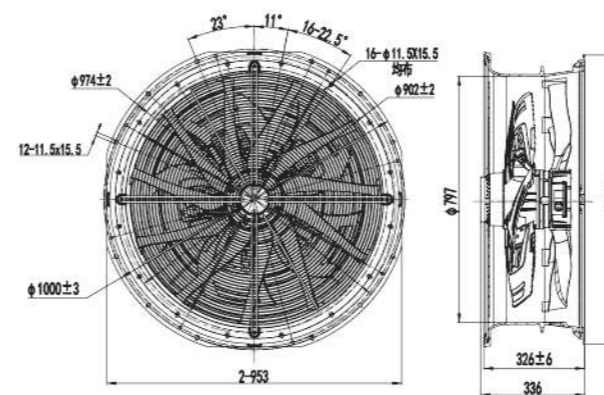

带塑料风筒 Plastic air guide 970G	
型号 MODEL	
YSWF138L100P6-970G-800PA	
YSWF138L118P6-970G-800PA	

Ø 900

AC AXIAL FAN

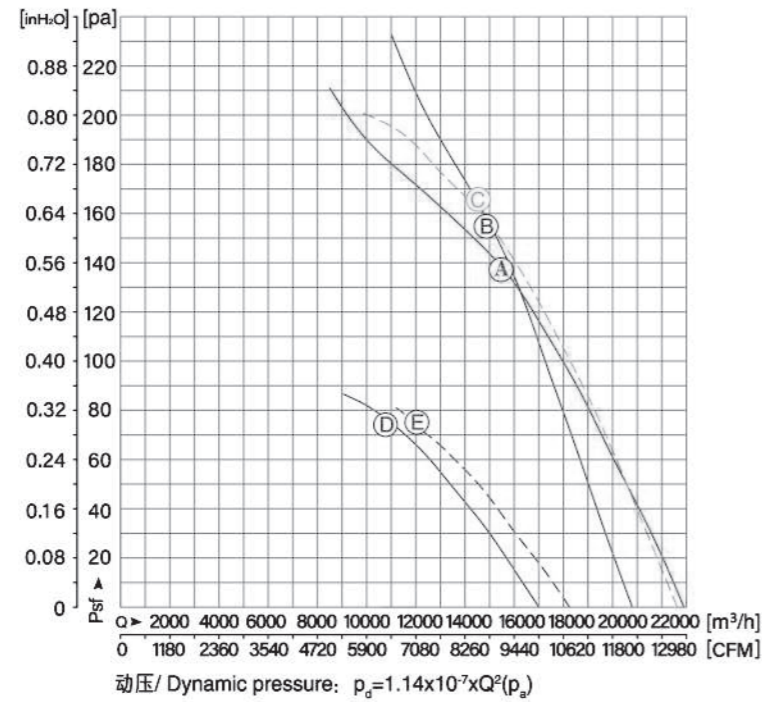


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	℃		dB(A)	
YSWF127L80P6-□-900	3~380	50	—	(A)	1738	901	3.62	135	-40~+60	ERP2026*	77	
YSWF127L80P6-□-900	3~380	50	—	(B)	1770	891	3.72	158	-40~+60	ERP2026*	76	
		60		(C)	1879	1061	3.69	165	-40~+55	ERP2026*	78	
YSWF127L80P8-□-900	3~380	50	—	(D)	849	633	1.77	75	-40~+65	ERP2026	69	
		60		(E)	1018	693	1.89	76	-40~+60	ERP2026	71	

Ø 900

INSTALLATION ACCESSORIES

□-1075N

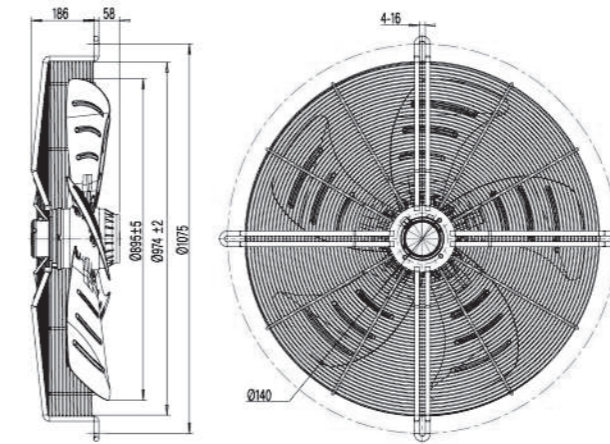


常规凹网罩 Concave grid 1075N

型号 MODEL

YSWF127L80P6-1075N-900

YSWF127L80P8-1075N-900

□-1010H

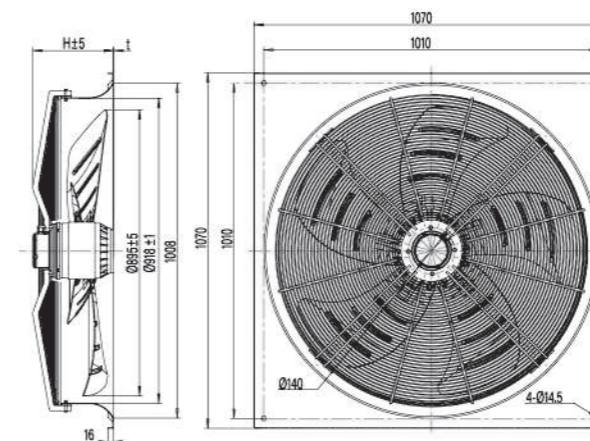

带导风圈 Wall plate 1010H

型号 MODEL

YSWF127L80P6-1010H-900

YSWF127L80P8-1010H-900

带翻边罩圈 Flanging wall plate 1010H

型号 MODEL

YSWF127L80P6-1010H-900

YSWF127L80P8-1010H-900

Ø 900


AC AXIAL FAN



叶轮材质: 铝合金塑料混合式



Impeller Material: Hybrid

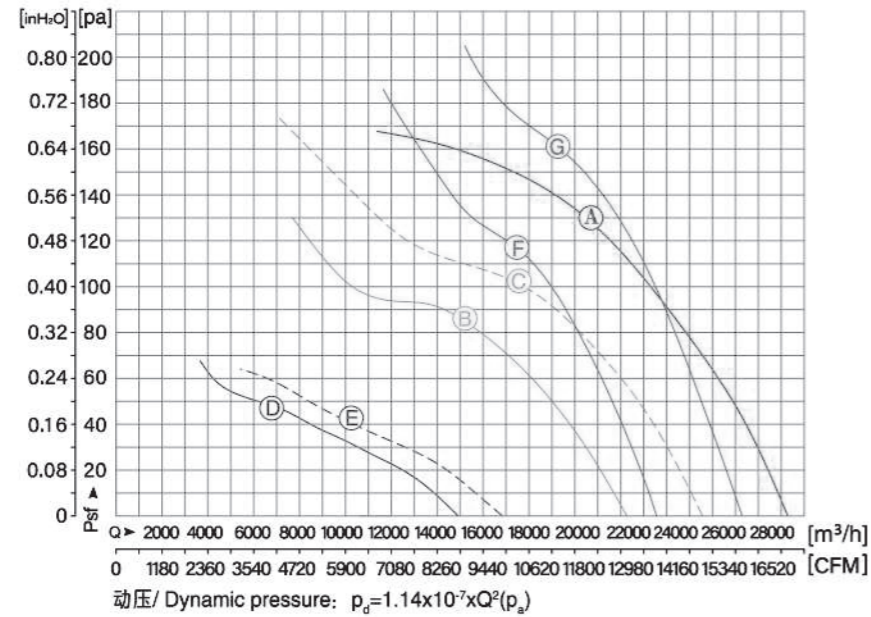



型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	45度角(45°)
YSWF138L118P6-□-900PA	3~380	50	—	(A)	2579	886	5.15	130	-40~+50	ERP2026	77	
YSWF138L118P8-□-900PA	3~380	50	—	(B)	1268	691	2.91	83	-40~+65	ERP2026	71	
		60		(C)	1851	779	3.39	103	-40~+65	ERP2026	73	
YSWF138L76P12-□-900PA	3~380	50	—	(D)	393	434	1.02	47	-40~+65	ERP2026	63	
		60		(E)	514	472	1.10	41	-40~+65	ERP2026	65	
YSWF138L118P6-□-900PA	3~380	50	—	(F)	1761	942	4.14	118	-40~+70	ERP2026	76	35度角
		60		(G)	2680	1079	4.91	162	-40~+70	ERP2026*	78	

1. Specifications might change without notice;

2. Special design on request

Ø 900

AC AXIAL FAN

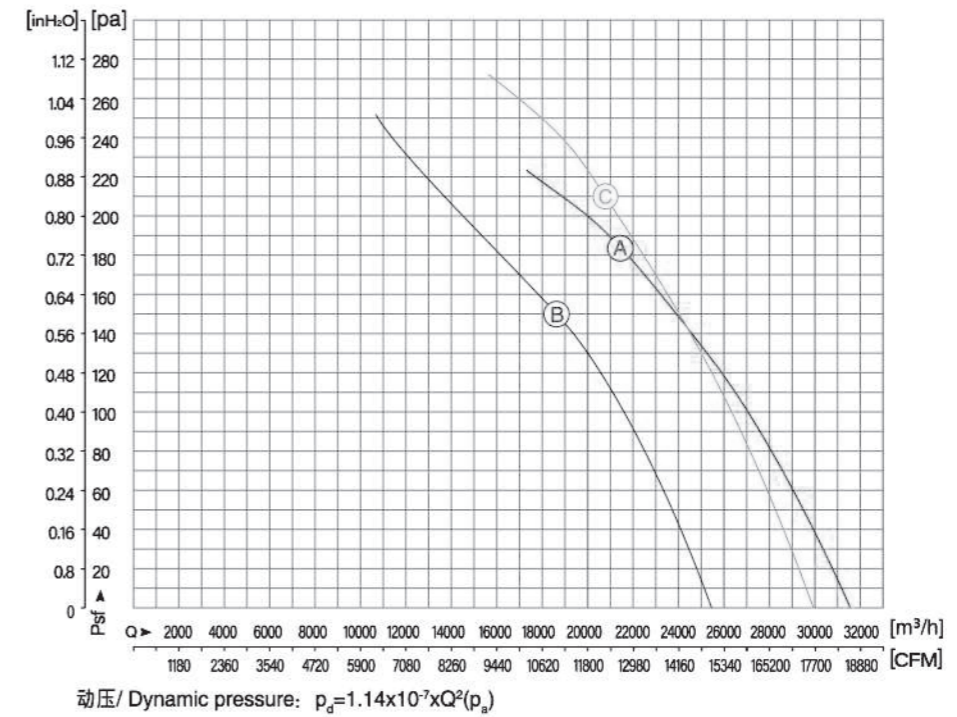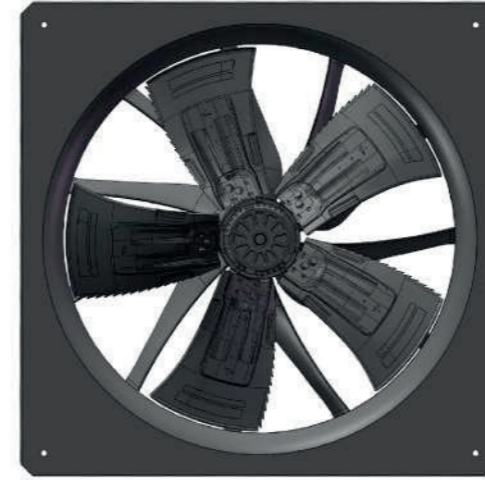




型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃		dB/(A)	
YSWF138L118P6-□-900PA	3~380	50	—	(A)	2661	909	5.4	183	-40~+50	ERP2026	74	
YSWF138L118P6-□-900PA	3~380	50	—	(B)	1790	958	4.38	150	-40~+60	ERP2026	74	
		60		(C)	2717	1093	4.88	209	-40~+70	ERP2026	76	

1. Specifications might change without notice;

2. Special design on request

# Ø 850/900/950

## AC AXIAL FAN

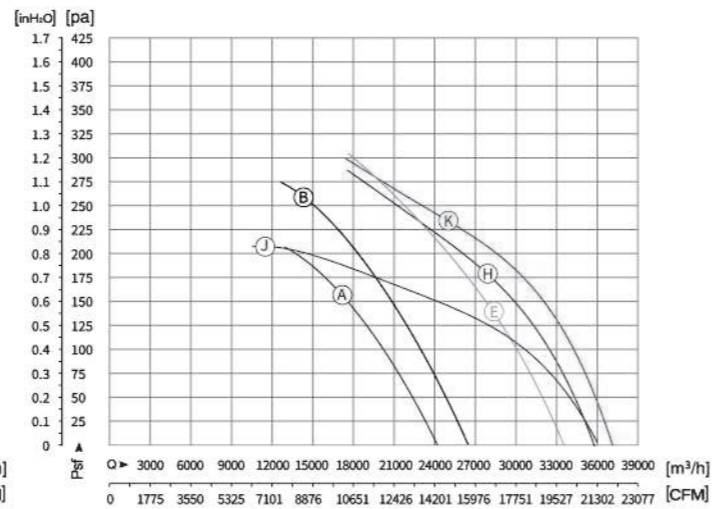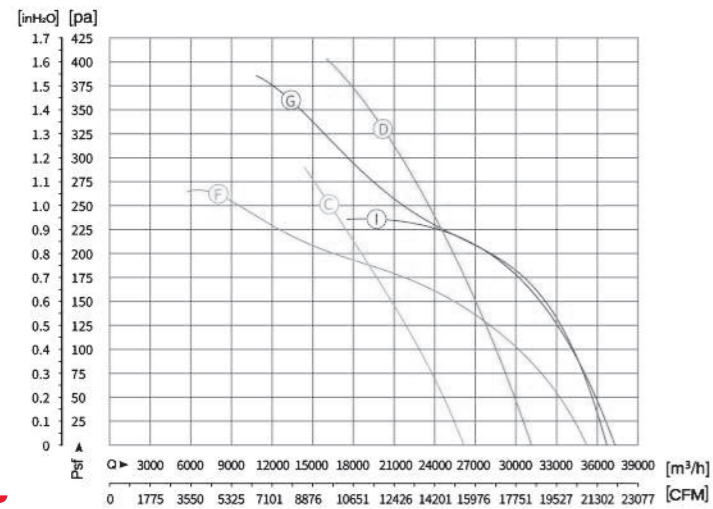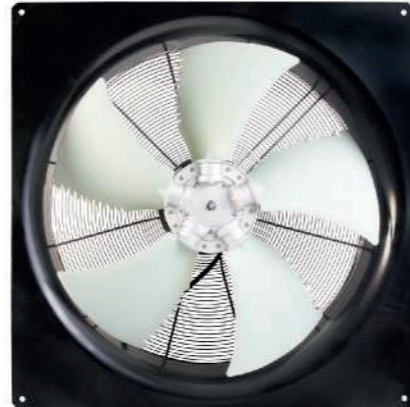

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	欧盟能效 EU EE	噪声 Noise	备注 Note
	V	Hz	µF/450V	NO.	W	r/min	A	Pa	°C		dB(A)	
YSF132P6-1.5-□-850-5S	3~380	50	—	(A)	1948	947	3.82	161	-40~+70	ERP2026*	79	
YSF132P6-2.2-□-850-5S	3~380	50	—	(B)	2720	955	5.13	193	-40~+70	ERP2026*	79	
YSF132P6-3.5-□-850-5S	3~380	50	—	(C)	2899	980	6.62	224	-40~+70	ERP2026*	79	
	3~380	60	—	(D)	4783	1153	8.16	315	-40~+70	ERP2026*	80	
YSF132P6-3.5-□-900-6S	3~380	50	—	(E)	4172	963	7.99	222	-40~+70	ERP2026	81	
YSF132P6-3.5-□-950PA-5S	3~380	50	—	(F)	3513	868	6.58	150	-40~+70	ERP2026	77	Y
	3~380	50	—	(G)	3819	973	7.79	210	-40~+70	ERP2026*	81	Δ
YSF132P6-4.2-□-950-5S	3~380	50	—	(H)	3915	970	8.03	198	-40~+70	ERP2026*	81	铝叶片
YSF132P6-4.2-□-950PA-5S	3~380	50	—	(I)	3752	973	7.84	180	-40~+70	ERP2026*	81	
YSF132P6-3.5-□-955PA-5S	3~380	50	—	(J)	3744	843	7.09	151	-40~+70	ERP2026	77	Y
	3~380	50	—	(K)	3939	972	7.98	211	-40~+70	ERP2026*	81	Δ


1. Specifications might change without notice;

2. Special design on request

# Ø 900


## INSTALLATION ACCESSORIES

### □-1075N

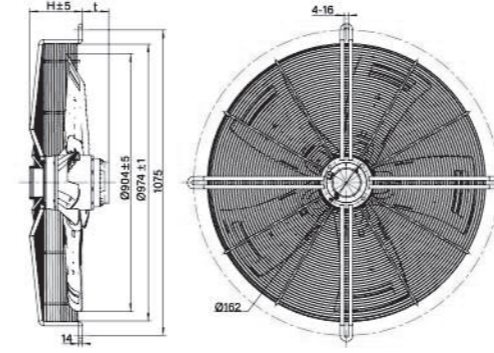


常规凹网罩 Concave grid 1075N			
型号 MODEL	H	t	
YSWF138L118P6-1075N-900	186	92	
YSWF138L118P8-1075N-900	186	92	
YSWF138L76P12-1075N-900	186	50	

### □-1010H

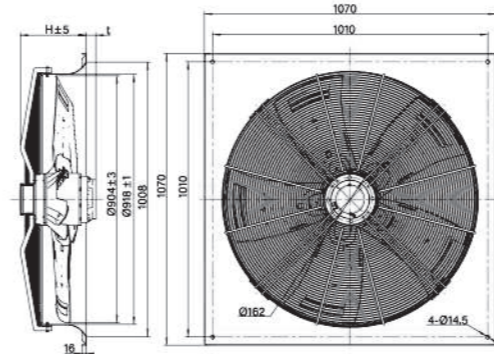


带网风圈 Wall plate 1010H		带翻边网圈 Flanging wall plate 1010H			
型号 MODEL	H	t	型号 MODEL	H	t
YSWF138L118P6-1010H-900	242	45	YSWF138L118P6-1010H-900	265	15
YSWF138L118P8-1010H-900	242	45	YSWF138L118P8-1010H-900	265	15
YSWF138L76P12-1010H-900	242	—	YSWF138L76P12-1010H-900	265	—

### □-1010G

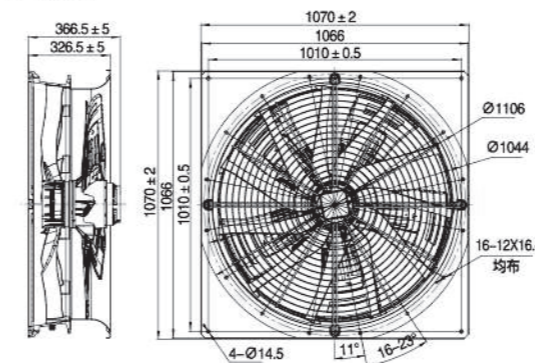

带导叶风圈 1010G Guide vane and wall plate	
型号 MODEL	
YSWF138L118P6-1010G-900 PA	

### 内转子风机

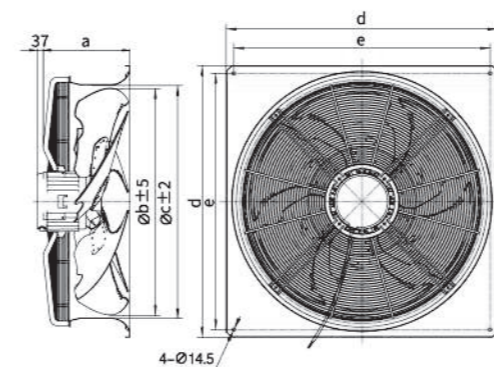

带翻边网圈 Flanging wall plate					
型号 MODEL	a	b	c	d	e
YSF132P6-1.5-910H-850-5S	295	850	860	970	910
YSF132P6-2.2-910H-850-5S	295	850	860	970	910
YSF132P6-3.5-910H-850-5S	295	850	860	970	910
YSF132P6-3.5-1010H-900-6S	285	900	918	1070	1010
YSF132P6-3.5-1010H-950PA-5S	335	950	964	1070	1010
YSF132P6-4.2-1010H-950-5S	335	950	964	1070	1010
YSF132P6-4.2-1010H-950PA-5S	335	950	964	1070	1010

1. Specifications might change without notice;

2. Special design on request



MOTORS & FANS

## SALES NETWORK

### Contacts

For any further info please contact us at the following address

FANLAB  
[info@fanlab.com](mailto:info@fanlab.com)  
[www.fanlab.com](http://www.fanlab.com)